

SERVICE MANUAL

AM/FM STEREO RECEIVER **SANSUI 221/331/331L/331SS**



Sansui

SANSUI ELECTRIC CO., LTD.

This service manual is designed for service engineers to repair, adjust, maintain and order the replacement parts of the 331, 331L, 331SS, 221 correctly.

When ordering the parts, use the stock number and parts name specifically referring to the Parts Locations & Parts Lists.

For general usage and maintenance of the unit, please refer to the Operating Instructions attached with the unit.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1.	SPECIFICATIONS	2
2.	PARTS LOCATION AND PARTS LIST	3
2-1.	F-2531 Main Circuit Board	3, 4
2-2.	F-2535 Tuner & Equalizer Circuit Board (MODEL 331, 221)	5, 6
2-3.	F-2540 Tuner & Equalizer Circuit Board (MODEL 331SS, 331L)..	7, 8
2-4.	Other Parts (Top Side).....	9
2-5.	Other Parts (Front Side)	10
3.	THREADING OF DIAL CORD	11
4.	ALIGNMENTS	12
4-1.	FM Alignment	12
4-2.	AM Alignment	13, 14
5.	TROUBLESHOOTING CHART	15
5-4.	Operation Block Diagram.....	16
6.	BOLCK DIAGRAM	17
7.	SCHEMATIC DIAGRAM	18
7-1.	SANSUI 221 Schematic Diagram	18
7-2.	SANSUI 331 Schematic Diagram	19
7-3.	SANSUI 331L Schematic Diagram	20
7-4.	SANSUI 331SS Schematic Diagram	21
8.	PACKING LIST	22
9.	ACCESSORY PARTS LIST	22

1. SPECIFICATIONS

POWER OUTPUT

Min. RMS, both channels driven, from 40 to 20,000Hz, with no more than 1.0% total harmonic distortion.

12 watts per channel into 4 ohms *8 watts (221 only)

12 watts per channel into 8 ohms *8 watts (221 only)

Min. RMS, both channels driven, at 1kHz, with no more than 1.0% total harmonic distortion.

14 watts per channel into 4 ohms *10 watts (221 only)

13 watts per channel into 8 ohms *9 watts (221 only)

LOAD IMPEDANCE.....4 ohms and 8 ohms

POWER BANDWIDTH40 to 20,000Hz
at or below rated min. RMS power output and total harmonic distortion

TOTAL HARMONIC DISTORTION

OVERALL (from AUX).....less than 1.0%
at or below rated min. RMS power output

INTERMODULATION DISTORTION (70Hz: 7,000Hz=4: 1 SMPTE method)

OVERALL (from AUX).....less than 1.0%
at rated min. RMS power output

FREQUENCY RESPONSE (at 1 Watt power output)

OVERALL (from AUX).....25 to 30,000Hz $\pm 2.0_{-3.0}$ dB

EQUALIZATION (at TAPE REC output)

.....RIAA Curve
(30 to 15,000Hz ± 1.5 dB)

DAMPING FACTOR30 (8 Ω)

CHANNEL SEPARATION (1,000Hz, at rated power output)

PHONObetter than 45dB

AUX.....better than 45dB

HUM AND NOISE (IHF)

PHONObetter than 70dB

AUX.....better than 80dB

INPUT SENSITIVITY AND IMPEDANCE (1,000Hz, for rated power output)

PHONO2.5mV 50k Ω

(Max. input capability: 120mV at 0.5% distortion)

AUX.....150mV 50k Ω

TAPE

PLAY Pin Jacks150mV 50k Ω

REC/PLAY DIN Socket.....150mV 50k Ω

RECORDING OUTPUT

TAPE

REC Pin jacks.....150mV

REC/PLAY DIN Socket.....30mV

SWITCHES AND CONTROLS

BASS+12dB, -12dB at 50Hz

TREBLE.....+10dB, -10dB at 10,000Hz

LOUDNESS+10dB at 50Hz
+8dB at 10,000Hz

TUNER SECTION

[FM]

TUNING RANGE88 to 108MHz

SENSITIVITY2.5 μ V (IHF)

1.3 μ V (DIN)

TOTAL HARMONIC DISTORTION

MONO0.8%

STEREO1.0%

SIGNAL TO NOISE RATIO.....better than 65dB

SELECTIVITYbetter than 60dB

CAPTURE RATIO1.5dB

IMAGE REJECTIONbetter than 50dB at 98MHz

IF REJECTIONbetter than 70dB at 98MHz

SPURIOUS RESPONSE REJECTION better than 70dB at 98MHz

SPURIOUS RADIATIONless than 34dB

STEREO SEPARATION.....better than 35dB at 1kHz

FREQUENCY RESPONSE.....30 to 12,000Hz

ANTENNA INPUT IMPEDANCE ..300 Ω balanced

75 Ω unbalanced

[AM]

<MW> *Not Included in 331SS

TUNING RANGE535 to 1,605kHz

SENSITIVITY (bar antenna)50dB/m at 1MHz 54dB (331L)

SELECTIVITYbetter than 40dB at 1MHz

IMAGE FREQUENCY REJECTION..better than 80dB/m at 1MHz

IF REJECTIONbetter than 80dB/m at 1MHz

<SW1> *331SS ONLY

TUNING RANGE2.3 to 6.5MHz

SENSITIVITY20 μ V at 4MHz

SELECTIVITYbetter than 40dB at 4MHz

IMAGE FREQUENCY REJECTION..better than 40dB at 12MHz

IF REJECTIONbetter than 80dB at 12MHz

<SW2> *331SS ONLY

TUNING RANGE6.5 to 18MHz

SENSITIVITY30 μ V at 12MHz

SELECTIVITYbetter than 40dB at 4MHz

IMAGE FREQUENCY REJECTION..better than 40dB at 12MHz

IF REJECTIONbetter than 80dB at 12MHz

<LW> *331L ONLY

TUNING RANGE150 to 350kHz

SENSITIVITY{60dB/m at 250kHz (Bar Antenna)

{300 μ V at 250kHz (EXT)

SELECTIVITY (± 10 kHz)better than 40dB at 1,000kHz

IMAGE REJECTIONbetter than 90dB/m

at 250kHz

IF REJECTIONbetter than 90dB at 250kHz

OTHERS

POWER REQUIREMENTS

VOLTAGE120, 220, 240V, 50/60Hz

CONSUMPTION (331, SS, L) ..50W (rated), 90W (max.)

CONSUMPTION (221).....45W (rated), 75W (max.)

* Design and specifications subject to change without notice for improvement.

2. PARTS LOCATION AND PARTS LIST


2-1. F-2531 Main Circuit Board (Complete Circuit Board) MODEL: 331 (Stock No. 7592391)

331L (Stock No. 7592693)

331SS (Stock No. 7592686)

221 (Stock No. 7592481)

Conductor Side

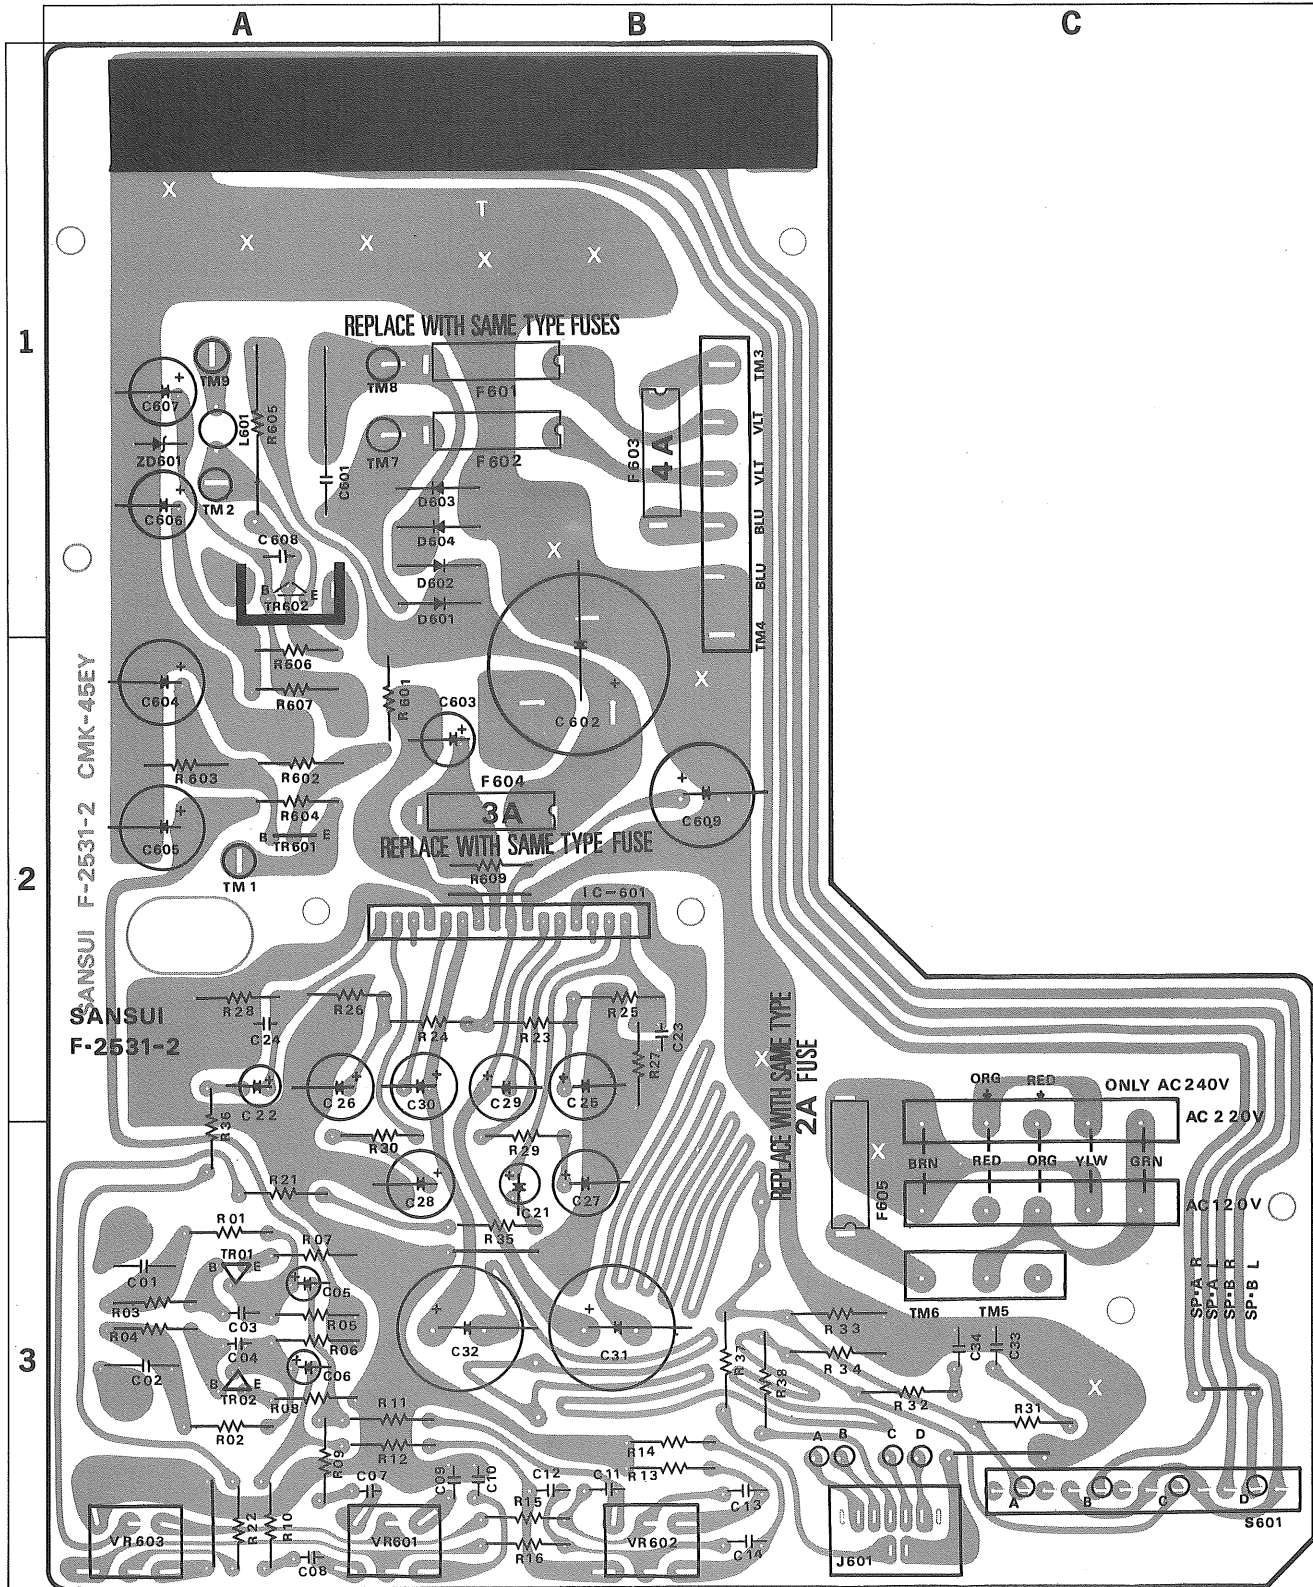

Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position			
TR01, 02	{ 0306011, 2 0306070, 1	{ 2SC1222 (E, F) 2SC1313 (F, G)	Transistor 3 A 2 A 1 A	R27, 28	0107224	220kΩ 1/4W C.R.	2 B, 2 A	R602	0210153	15kΩ	2 A			
TR601	0306131, 2	2SC1364 (6, 7)		R31, 32	0111689	6.8Ω 1/2W S.R.	3 C	R603	0210104	100kΩ	1/2W Ce.R.	2 A		
TR602	0308361, 2	2SD330 (D, E)		R33, 34	0111471	470Ω 1/2W S.R.	3 B C	R604	0210121	120Ω		2 A		
D601	0310340	10D1	Diode 1 A, B 1 A, B 1 A, B 1 A, B	R35, 36	0107102	1kΩ 1/4W C.R.	3 B, 2, 3A	R605	0133181	180Ω	3 W Ce.R.	1 A		
D602	0310340	10D1		R37, 38	0111331	330Ω	3 B	R606	0210332	3.3kΩ		2 A		
D603	0310340	10D1		R601	0111471	470Ω	1/2W S.R.	2 A	R607	0210332	3.3kΩ	1/2W Ce.R.	2 A	
D604	0310340	10D1		R604	0107121	120Ω		2 A	R609	0210101	100Ω		2 A, B	
ZD601	{ 0315980 0316320	{ EGA01-14R RD-13E C	Zener Diode 1 A	R606	0107332	3.3kΩ	1/2W C.R.	2 A	S601	1101660	N-1-2-5 Rotary Switch	3 C		
C01, 02	0601228	0.22μF	50V M.C.	3 A	L601	4900110	100μH Inductor	1 A	F601	0435160	4A 250V	1 B		
C03, 04	0660100	10pF	50V C.C.	3 A	VR601	1015140, 1	100kΩ A×2	3 A	F602	0435160	4A 250V	1 B		
C05, 06	0519101	1μF	50V E.C.	3 A	VR602	1015140, 1	100kΩ A×2	3 B	F603	0435160	4A 250V	1 B		
C07, 08	0601276	0.0027μF		3 A	VR603	1015130, 1	100kΩ MN	3 A	F604	0433630	4A 250V	Q.A. Fuse	2 A, B	
C09, 10	0601127	0.018μF	50V M.C.	3 B	J601	2430240	JACK	3 C	F605	0435120	1.6A 250V	Time Log Fuse	2, 3 C	
C11, 12	0601227	0.022μF		3 B	IC601	0360240	STK-014 IC	2 A, B	C23, 24	0660101	100pF 50V C.C.	2 B, 2 A		
C13, 14	0601188	0.18μF		3 B	C23, 24	0660101	100pF 50V C.C.	2 B, 2 A	C601	0659012	22000pF 500V C.C.	1 A		
C21, 22	0519103	0.47μF	50V E.C.	3 B, 2 A	C601	0659012	22000pF 500V C.C.	1 A	R29, 30	0107151	150Ω	1/4W C.R.	3 B, 3 A	
C25, 26	0515100	10μF		2 B, 2 A	R29, 30	0107151	150Ω	2 A	R602	0107153	15kΩ	1/4W C.R.	2 A	
C27, 28	0512221	220μF	16V E.C.	3 B, 3A, B	R602	0107153	15kΩ 1/4W C.R.	2 A	R603	0107104	100kΩ		2 A	
C29, 30	0513101	100μF	25V E.C.	2 B, 2A, B	R603	0107104	100kΩ	2 A	R605	0133181	180Ω	3 W Ce.R.	1 A	
C31, 32	0514222	2200μF	35V E.C.	3 B, 3A, B	R605	0133181	180Ω 3 W Ce.R.	1 A	S601	1101660	N-1-2-5 Rotary Switch	3 C		
C33, 34	0601108	0.1μF	50V M.C.	3 C	S601	1101660	N-1-2-5 Rotary Switch	3 C	F603	0431270	4A 250V AC Fuse	2 A		
C602	0549109	2200μF		1, 2 B	F604	0431270	4A 250V Q.A. Fuse	2 A	F604	0433270	4A 250V Q.A. Fuse	2 A, B		
C603	0515100	10μF	50V E.C.	2 A, B	F605	{ 0431220 0432230	{ 1A 250V 1.5A 250V	AC Fuse	1 A	F605	{ 0431220 0431230	{ 1.5A 250V 2A 250V	AC Fuse	3 C
C604	0515221	220μF	50V E.C.	2 A	331S ONLY	IC601	0360240	STK-014 IC	2 A, B	S601	1101660	N-1-2-5 Rotary Switch	3 C	
C605	0515101	100μF		2 A	C23, 24	0660101	100pF 50V C.C.	2 B, 2 A	F603	0431270	4A 250V AC Fuse	2 A		
C606	0514101	100μF	35V E.C.	1 A	C601	0659012	22000pF 500V C.C.	1 A	F604	0431270	4A 250V Q.A. Fuse	2 A		
C607	0512221	220μF	16V E.C.	1 A	R29, 30	0107151	150Ω	1/4W C.R.	3 B, 3 A	F605	{ 0431220 0431230	{ 1.5A 250V 2A 250V	AC Fuse	3 C
C608	0657222	2200pF	50V C.C.	1 A	R601	0210471	470Ω 1/2W Co.R.	2 A	221 ONLY	IC601	0360230	STK-013 IC	2 A, B	
C609	0515221	220μF	50V E.C.	2 B	C23, 24	0660101	330pF 50V C.C.	2 A	C23, 24	0660101	100pF 50V C.C.	2 B, 2 A		
R01, 02	0107105	1MΩ		3 A	C601	0606109	1μF 250V M.C.	1 A	C601	0659012	22000pF 500V C.C.	1 A		
R03, 04	0107561	560Ω		3 A	R29, 30	0107151	150Ω	1/4W C.R.	R29, 30	0107271	270Ω	1/4W C.R.	3 B, 3 A	
R05, 06	0107562	5.6kΩ		3 A	R601	0210471	470Ω 1/2W Co.R.	2 A	R605	0163221	220Ω	3 W Ce.R.	1 A	
R07, 08	0107271	270Ω		3 A	331L ONLY	IC601	0360240	STK-014 IC	2 A, B	F603	0431270	4A 250V AC Fuse	1 B	
R09, 10	0107561	560Ω		3 A	C23, 24	0660331	330pF 50V C.C.	2 A	F604	0433270	4A 250V Q.A. Fuse	2 A, B		
R11, 12	0107123	12kΩ	1/4W C.R.	3 A	C601	0606109	1μF 250V M.C.	1 A	F605	{ 0431210 0431220	{ 0.5A 250V 1A 250V	AC Fuse	2, 3 C	
R13, 14	0107182	1.8kΩ		3 B	R29, 30	0107151	150Ω 1/4W C.R.	3 B, 3 A						
R15, 16	0107272	2.7kΩ		3 B	R601	0210471	470Ω 1/2W Co.R.	2 A						
R21, 22	0107122	1.2kΩ		3 A										
R23, 24	0107224	220kΩ		2 B, 2A, B										
R25, 26	0107394	390kΩ		2 B, 2 A										


Figures

SEMICONDUCTORS	COMPLETE CIRCUIT BOARD	SEMICONDUCTORS	COMPLETE CIRCUIT BOARD	SEMICONDUCTORS	COMPLETE CIRCUIT BOARD	SEMICONDUCTORS	COMPLETE CIRCUIT BOARD
2SC1047 2SC1222 2SC1675 2SC1364	F-2540 F-2535 F-2531	μpc555H	F-2540 F-2535		F-2540 F-2535	1S2473D	F-2540 F-2535
2SC738 2SC1313	F-2540 F-2535	μpc554C	F-2540 F-2535	10D-1	F-2531	RD-13EC	F-2531
2SC930	F-2540 F-2535	2SK49 2SK83	F-2540 F-2535	Abbreviations C.R. : Carbon Resistor B.P.E.C.: Bi-Polar Electrolytic Capacitor S.R. : Solid Resistor C.C. : Ceramic capacitor Ce.R. : Cement Resistor M.C. : Mica Capacitor M.R. : Metallized Film Resistor O.C. : Oil Capacitor M.C. : Mylar Capacitor P.C. : Polystyrene Capacitor E.C. : Electrolytic Capacitor T.C. : Tantalum Capacitor			
2SB330	F-2531	STK014 STK013	F-2531				

2-2. F-2535 Tuner & Equalizer Circuit Board (Complete Circuit Board)

MODEL: 331 (Stock No. 7521071)
221 (Stock No. 7521081)

Conductor Side

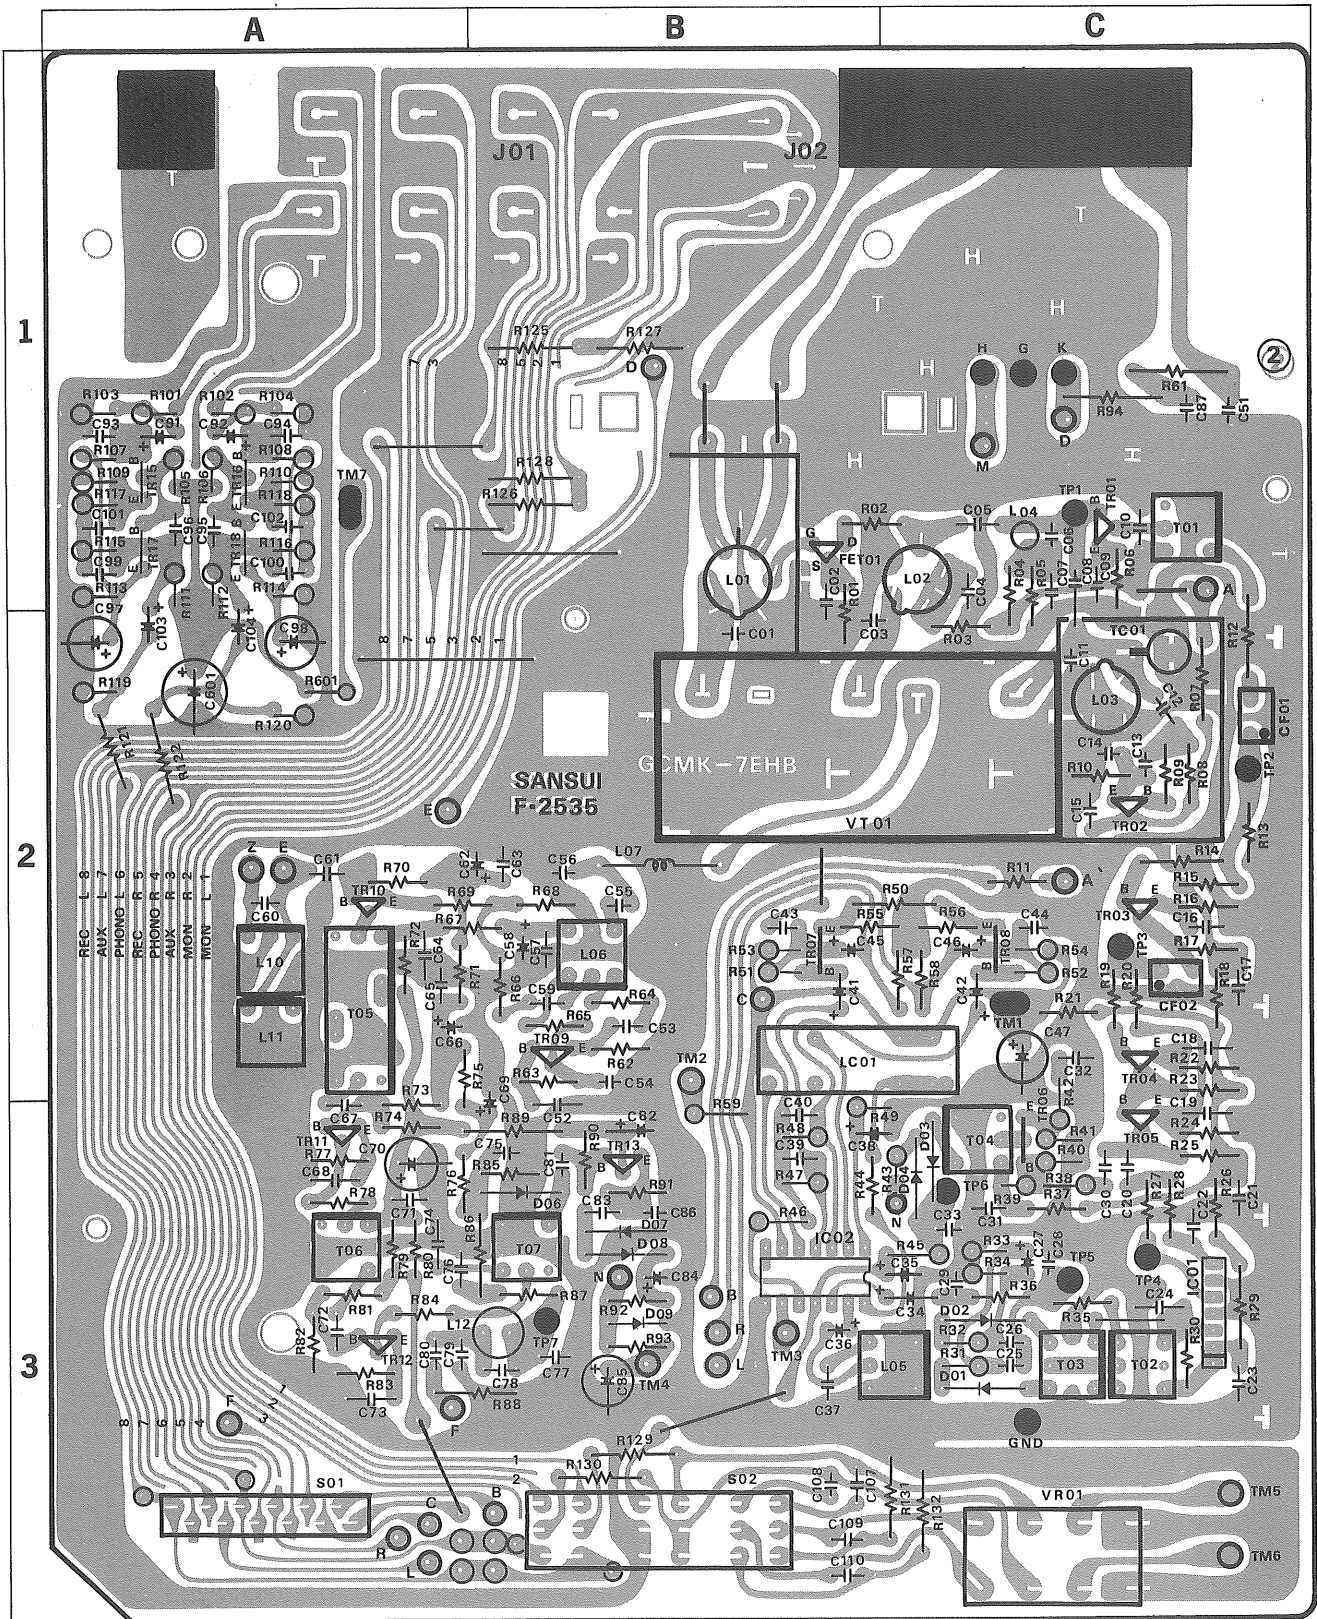


Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position		
TR01	0305801.2	2SC1047 (B, C)	1C	C61	0657223	22000pF 50V C.C.	2A	R54	0106332	3.3kΩ 1/4W C.R.	2C		
TR02	0305790.1	2SC930 (C, D)	2C	C62	0515109	1μF 50V E.C.	2A, B	R55	0113681	680Ω	2B, C		
TR03	0306112.3	2SC738 (C, D)	2C	C63	0657223	22000pF	2A	R56	0113681	680Ω	2C		
TR04	0306112.3	2SC738 (C, D)	2C	C64	0657473	42000pF 50V C.C.	2A	R57	0113473	47kΩ	2C		
TR05	0306112.3	2SC738 (C, D)	3C	C65	0657223	22000pF	2A	R58	0113473	47kΩ	2C		
TR06	0306112.3	2SC738 (C, D)	3C	C66	0512100	10μF 16V E.C.	2A	R59	0111561	560Ω 1/2W S.R.	3B		
TR07	0306011.2	2SC1222 (E, F)	2B	C67	0657223	22000pF 50V C.C.	2, 3A	R61	0111682	6.8kΩ 1/2W M.R.	1C		
	0306070.1	2SC1313 (F, G)	2B	C68	0601687	0.068μF 50V M.C.	3A	R62	0113102	1.0kΩ	2B		
TR08	0306011.2	2SC1222 (E, F)	Transistor	C69	0512100	10μF	2, 3B	R63	0113334	330kΩ	2B		
	0306070.1	2SC1313 (F, G)		2C	C70	0512470	47μF	3A	R64	0113100	10Ω	2B	
TR09	0306241.2	2SC1675 (L, K)		2B	C71	0657223	22000pF	3A	R65	0113331	330Ω	2B	
TR10	0306241.2	2SC1675 (L, K)		2B	C72	0657223	22000pF	3A	R66	0113101	100Ω	2B	
TR11	0306241.2	2SC1675 (L, K)		3A	C73	0601687	0.068μF 50V M.C.	3A	R67	0113272	2.7kΩ	2A, B	
TR12	0306241.2	2SC1675 (L, K)		3A	C74	0657473	47000pF 50V C.C.	3A	R68	0113102	1.0kΩ	2B	
TR13	0306241.2	2SC1675 (L, K)		3B	C75	0601157	0.015μF	3B	R69	0113220	22Ω	2A, B	
TR15, 16	0306011.2	2SC1222 (E, F)		1A	C76	0601227	0.022μF	3A	R70	0113103	10kΩ	2A	
	0306070.1	2SC1313 (F, G)				C77	0601107	0.01μF	3B	R71	0113222	2.2kΩ	2A
	0306011.2	2SC1222 (E, F)				C78	0601107	0.01μF	3B	R72	0113221	220Ω	2A
TR17, 18	0306070.1	2SC1313 (F, G)	1A	C79	0601127	0.012μF	3A	R73	0113102	1kΩ	2, 3A		
				C80	0601567	0.056μF	3A	R74	0113104	100kΩ	3A		
IC01	0360120	μPC555H	3C	C81	0660101	100pF 50V C.C.	3B	R75	0113222	2.2kΩ	2, 3A		
IC02	0360250	μPC554H	3B	C82	0515109	1μF 50V E.C.	3B	R76	0113153	15kΩ	3A		
FET01	0370172	FET 2SK49 H	FET	C83	0657223	22000pF 50V C.C.	3B	R77	0113471	470Ω	3A		
	0370182	FET 2SK83 R		1B	C84	0515109	1μF 50V E.C.	3B	R78	0113101	100Ω	3A	
	0370191.2	FET 2SK61 (Y, G, R)			C85	0510101	100μF 6.3V E.C.	3B	R79	0113221	220Ω	3A	
D01	0311060	1N60-P	3C	C91, 92	0519104	1.5μF 50V E.C.	1A	R80	0113470	47Ω	3A		
D02	0311060	1N60-P	3C	C93, 94	0660151	150pF	1A	R81	0113223	22kΩ	3A		
D03	0310330.1	1N60	3C	C95, 96	0660151	150pF	1A	R82	0113472	4.7kΩ	3A		
D04	0311160	12S473D	3C	C97, 98	0510101	100μF 6.3V E.C.	7A	R83	0113331	330Ω	3A		
D06	0310330.1	1N60	3B	C99, 100	0601276	0.0027μF	1A	R84	0113331	330Ω	3A		
D07	0310330.1	1N60	3B	C101, 102	0601107	0.01μF	50V M.C.	1A	R85	0113103	10kΩ	3B	
D08	0310330.1	1N60	3B	C103, 104	0519103	0.47μF 50V E.C.	1, 2A	R86	0107102	1kΩ 1/4W C.R.	3A, B		
D09	0311160	12S473D	3B	C107, 108	0620471	470pF 50V P.C.	3B	R87	0113102	1.0kΩ 1/4W S.R.	3B		
				C109, 110	0601227	0.022μF 50V M.C.	3B	R88	0107473	47kΩ	3A, B		
				C601	0514101	100μF 35V E.C.	2A	R89	0107152	1.5kΩ 1/4W C.R.	3A, B		
C01	0669350	15pF	2B	R01	0113101 (FET01→2SK61 GY)	100Ω 1/4W	1, 2B	R90	0113154	150kΩ	3B		
C02	0657223	22000pF	1, 2B		0113180 (FET01→2SK49, 2SK61, Y 2SK56)	18Ω S.R.		R91	0113222	2.2kΩ	3B		
C03	0669353	18pF	2B, C	R02	0113220	22Ω	1B, C	R92	0113472	4.7kΩ	3B		
C04	0657223	22000pF	1C	R03	0113220	22Ω	2C	R93	0113182	1.8kΩ	3B		
C05	0661100	10pF	1C	R04	0113123	12kΩ	1, 2C	R101, 102	0106222	2.2kΩ	1A		
C06	0661100	10pF	1C	R05	0113222	2.2kΩ	1/4W S.R.	R103, 104	0106563	56kΩ	1A		
C07	0660221	220pF	1C	R06	0113102	1.0kΩ	1, 2C	R105, 106	0106104	100kΩ	1A		
C08	0669021	1.5pF	1, 2C	R07	0113102	1.0kΩ	1C	R107, 108	0106224	220kΩ	1A		
C09	0657223	22000pF	50V C.C.	R08	0107332	3.3kΩ	1/4W C.R.	R109, 110	0106561	560Ω	1A		
C10	0657223	22000pF	1C	R09	0113184	180kΩ	2C	R111, 112	0106562	5.6kΩ	1A		
C11	0669356	22pF	2C	R10	0113220	22Ω	2C	R113, 114	0106331	330Ω	1A		
C12	0669345	10pF	2C	R11	0113102	1.0kΩ	1/4W S.R.	R115, 116	0106273	27kΩ	1A		
C13	0669345	10pF	2C	R12	0113270	27Ω	2C	R117, 118	0106394	390kΩ	1A		
C14	0669345	10pF	2C	R13	0107101	100Ω	1/4W C.R.	R119, 120	0106104	100kΩ	2A		
C15	0657223	22000pF	2C	R14	0113392	3.9kΩ	1/4W S.R.	R121, 122	0107681	680Ω	2A		
C16	0657223	22000pF	2C	R15	0107101	100Ω	1/4W C.R.	R125, 126	0107394	390kΩ	1B		
C17	0657223	22000pF	2C	R16	0113152	1.5kΩ	2C	R127, 128	0107104	100kΩ	1B		
C18	0601397	0.039μF	50V M.C.	R17	0113152	1.5kΩ	2C	R129, 130	0107123	12kΩ	3B		
C19	0601397	0.039μF	50V M.C.	R18	0113471	470Ω	2C	R131, 132	0107183	18kΩ	3B, C		
C20	0657223	22000pF	3C	R19	0113100	10Ω	2C	R601	0106391	220Ω	2A		
C21	0657223	22000pF	3C	R20	0113101	100Ω	2C	L01	4200720	Antenna Coil	1, 2B		
C22	0657223	22000pF	3C	R21	0113102	1.0kΩ	2C	L02	4210340	RF Coil	1, 2C		
C24	0657473	47000pF	50V C.C.	R22	0113152	1.5kΩ	2C	L03	4220400	OSC Coil	2C		
C25	0660101	100pF	3C	R23	0113821	820Ω	2C	L04	4900140	Inductor	1C		
C26	0660101	100pF	3C	R24	0113152	1.5kΩ	2C	L05	4240720, 1	MPX Coil	3B, C		
C27	0512100	10μF	16V E.C.	R25	0113471	470Ω	3C	L06	4220630	OSC Coil	2B		
C28	0660101	100pF	3C	R26	0113100	10Ω	3C	L07	4290011	Choke Coil	2B		
C29	0660101	100pF	3C	R27	0113100	10Ω	3C	L08	4200750	Antenna Coil	2B		
C30	0657223	22000pF	50V C.C.	R28	0113102	1.0kΩ	1/4W S.R.	L12	4900220	Inductor	3B		
C31	0657223	22000pF	50V C.C.	R29	0107100	10Ω	1/4W C.R.	T01	4235930		1C		
C32	0657223	22000pF	2C	R30	0113682	6.8kΩ	1/4W S.R.	T02	4235750		3C		
C33	0657102	1000pF	3C	R31	0106102	1kΩ	3C	T03	4235760		3C		
C34	0513479	4.7μF	25V E.C.	R32	0106102	1kΩ	3C	T04	4235940	IF Coil	3C		
C35	0519103	0.47μF	50V E.C.	R33	0106562	5.6kΩ	1/4W C.R.	T05	4230550		2A		
C36	0519103	0.47μF	50V E.C.	R34	0106562	5.6kΩ	3C	T06	4230610		3A		
C37	0629001	6800pF	50V P.C.	R35	0113101	100Ω	3C	T07	4230500		3B		
C38	0513479	4.7μF	25V E.C.	R36	0113102	1.0kΩ	1/4W S.R.	CF01	0910150	Ceramic Filter	2C		
C39	0601187	0.018μF	50V M.C.	R37	0113101	100Ω	3C	CF02	0910150	Ceramic Filter	2C		
C40	0601187	0.018μF	50V M.C.	R38	0113101	100Ω	3C	LC01	4240710, 1	MPX Unit	2B		
C41	0515109	1μF	50V E.C.	R39	0106331	330Ω	3C	VR01	1011020, 1	250kΩ×2 Volume	3C		
C42	0515109	1μF	50V E.C.	R40	0106152	1.5kΩ	1/4W C.R.	S01	1101670	Rotary Switch	3A		
C43	0601226	0.0022μF	50V M.C.	R41	0106471	470Ω	3C	S02	1131060, 1	Push Switch	3B		
C44	0601226	0.0022μF	2C	R42	0106331	330Ω	2, 3C	VT01	1220210	AM-FM VARIABLE CAPACITOR	2C		
C45	0519105	2.2μF	50V E.C.	R43	0106392	3.9kΩ	3C	TC01	1230090	6pF Trimmer	2C		
C46	0519105	2.2μF	2C	R44	0113470	47Ω	1/4W S.R.	J01	2200410	Push (PIN)	1B		
C47	0512470	47μF	16V E.C.	R45	0106473	47kΩ	3C	J02	2090030	5P Connector Socket	1B		
C51	0660101	100pF	50V C.C.	R46	0106334	330kΩ	3B	2230120	Push Terminal (Black)				
C52	0657473	47000pF	50V C.C.	R47	0106392	3.9kΩ	3B						
C53	0601107	0.01μF	50V M.C.	R48	0106392	3.9kΩ	3B						
C54	0660150	15pF	50V C.C.	R49	0106472	4.7kΩ	1/4W C.R.						
C55	0620361	360pF	50V P.C.	R50	0107393	39Ω	2B, C						
C56	0669400	15pF	50V C.C.	R51	0106105	1MΩ	2B						
C57	0657223	22000pF	50V C.C.	R52	0106105	1MΩ	2C						
C58	0512100	10μF	16V E.C.	R53	0106332	3.3kΩ	2B						
C59	0601227	0.022μF	50V M.C.										

2-3. F-2540 Tuner & Equalizer Circuit Board (Complete Circuit Board)

Conductor Side


MODEL: 331L (Stock No. 7521103)
331SS (Stock No. 7521096)

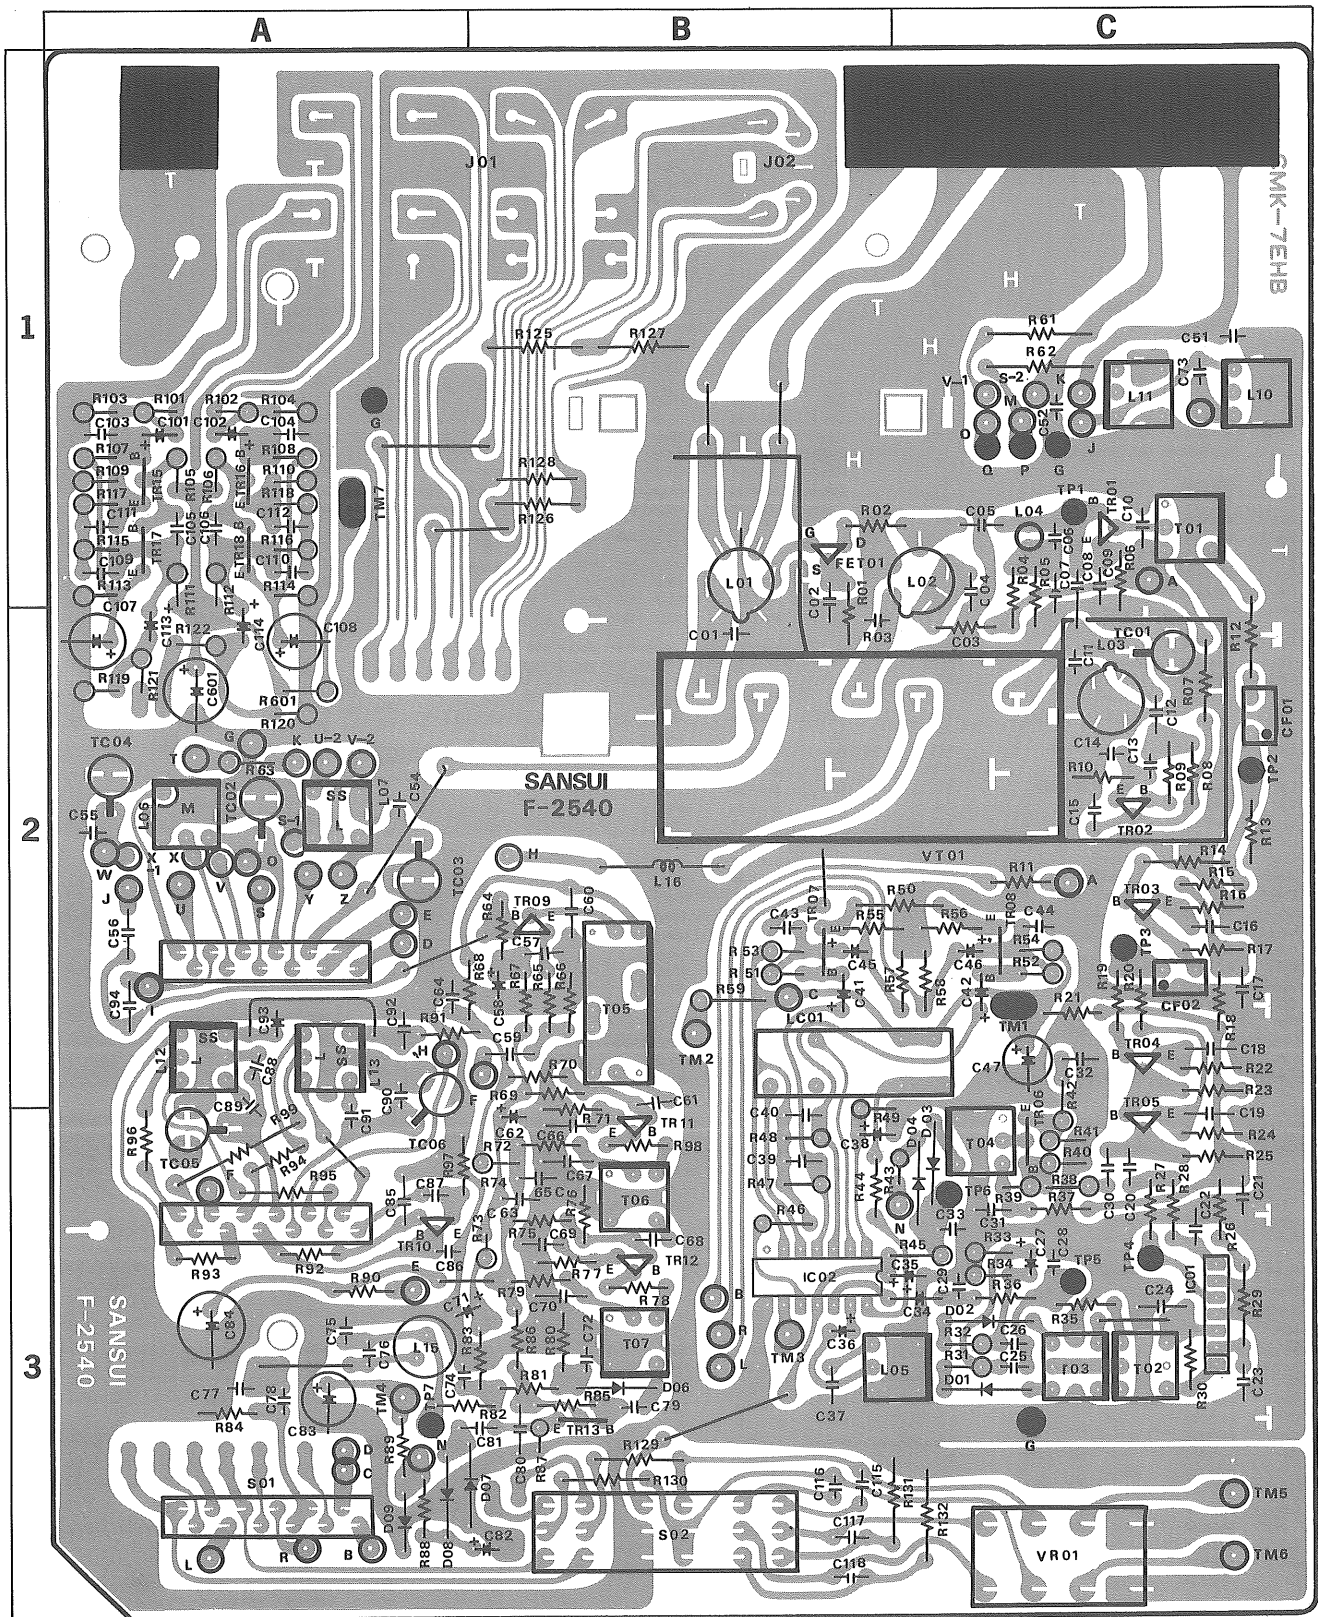

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	
TR01	0305801, 2	25C1047 (B, C)	1C	C93	0512100	10 μ F	16V E.C.	2A	R117, 118	0106394	390 Ω	1A
TR02	0305790, 1	25C930 (C, D)	2C	C101-102	0519104	1.5 μ F	50V E.C.	1A	R119, 120	0106104	100k Ω	2B, 2A
TR03	0306112, 3	25C738 (C, D)	2C	C103-104	0660151	150 pF	50V C.C.	1A	R121, 122	0106681	680 Ω	2A
TR04	0306112, 3	25C738 (C, D)	2C	C105-106	0660151	150 pF	50V C.C.	1A	R125, 126	0107394	390k Ω	1B
TR05	0306112, 3	25C738 (C, D)	3C	C107-108	0510101	100 μ F	6.3V E.C.	2A	R127, 128	0107104	100k Ω	1B
TR06	0306112, 3	25C738 (C, D)	3C	C109-110	0601276	0.0027 μ F	50V M.C.	1A	R129, 130	0107123	12k Ω	3B
TR07	0306011, 2	25C1222 (E, F)	2B	C111-112	0601107	0.01 μ F	50V M.C.	1A	R131, 132	0107183	18k Ω	3B, C, 3C
	0306070, 1	25C1313 (F, G)		C113-114	0519103	0.47 μ F	50V E.C.	2A	R601	0106391	390 Ω	2A
TR08	0306011, 2	25C1222 (E, F)	2C	C115-116	0620471	470 pF	50V P.C.	3B				
	0306070, 1	25C1313 (F, G)		C117-118	0601227	0.022 μ F	50V M.C.	3B				
TR09	0306241, 2	25C1675 (L, K)	2B	C601	0514101	100 μ F	35V E.C.	2A	L01	4200720	Antenna Coil	1, 2B
TR10	0306241, 2	25C1675 (L, K)	3A						L02	4210340	RF Coil	1, 2C
TR11	0306241, 2	25C1675 (L, K)	3B						L04	4900140	1 μ F Inductor	1C
TR12	0306241, 2	25C1675 (L, K)	3B						L05	4240720, 1	MPX Coil	3B, C
TR13	0306241, 2	25C1675 (L, K)	2B						L15	4900220	100 μ F Inductor	3A
TR15, 16	0306011, 2	25C1222 (E, F)	1A	R01	{ 0113101 } 100 Ω	{ FET01 \rightarrow 2SK61, GR }	1/4W S.R.	1, 2B	L16	4290011	Choke Coil	2B
	0306070, 1	25C1313 (F, G)			{ 0113180 } 10 Ω	{ FET01 \rightarrow 2SK49, 2SK56 }						
	0306011, 2	25C1222 (E, F)			{ 0113180 } 10 Ω	{ FET01 \rightarrow 2SKG1, Y }						
	0306070, 1	25C1313 (F, G)		R02	0113220	22 Ω		1B, C	T01	4235930	10.7MHz IF Coil	1C
IC01	0360120	μ pc555H	3C	R03	0113220	22 Ω		2B	T02	4235750	IF Coil (FM)	3C
IC02	0360250	μ pc554C	3B	R04	0113123	12k Ω	1/4W S.R.	1, 2C	T03	4235760	IF Coil (FM)	3C
				R05	0113222	2.2k Ω		1, 2C	T04	4235940	10.7MHz IF Coil	3C
				R06	0113102	1.0k Ω		1, 2C	T05	4230550	455kHz IF Coil	2B
				R07	0107332	3.3k Ω	1/4W C.R.	2C	T06	4230610	455kHz IF Coil	3B
				R08	0113184	180k Ω		2C	T07	4230500	455kHz IF Coil	3B
FET01	0370171, 2	2SK49 H		R09	0113220	22 Ω	1/4W S.R.	2C	CF01	0910150	10.7 μ H Ceramic Filter	2C
	0370182	2SK83 R	1B	R10	0113102	1k Ω		2C	CF02	0910150	10.7 μ H Ceramic Filter	2C
	0370191, 2	2SK61 Y, GR		R11	0113270	27 Ω		2C				
				R12	0107101	100 Ω	1/4W C.R.	2C	LC01	4240710, 1	MPX Coil	2B, C
D01	0311060	1N60-P	3C	R13	0113392	3.9k Ω	1/4W S.R.	2C				
D02	0311060	1N60-P	3C	R14	0107101	100 Ω	1/4W C.R.	2C	VR01	1011020, 1	250k Ω Volume	3C
D03	0310330, 1	1N60	3C	R15	0113152	1.5k Ω		2C				
D04	0311160	1S2473D	3C	R16	0113152	1.5k Ω		2C	S01	1103530	Rotary Switch	3A
D05	0310330, 1	1N60	3B	R17	0113471	470 Ω		2C	S02	1131060, 1	Push Switch	3B
D07	0310330, 1	1N60	3A, B	R18	0113100	10 Ω		2C	VT01	1220220	AM FM Variable Capacitor	2B, C
D08	0310330, 1	1N60	3A	R19	0113101	100 Ω		2C				
D09	0311160	1S2473D	3A	R20	0113102	1.0k Ω		2C	TC01	1230090	Trimmer Capacitor	2C
				R21	0113100	10 Ω		2C	TC02	1230060	Trimmer Capacitor	2A
C01	0669350	15 pF	2B	R22	0113152	1.5k Ω	1/4W S.R.	2C	TC03	1230060	Trimmer Capacitor	2A
C02	0657223	22000 pF	1, 2B	R23	0113821	820 Ω		2C	TC05	1230060	Trimmer Capacitor	3A
C03	0669353	18 pF	2C	R24	0113152	1.5k Ω		2C	TC06	1230060	Trimmer Capacitor	2, 2A
C04	0657223	22000 pF	1, 2C	R25	0113471	470 Ω		3C				
C05	0661100	10 pF	1C	R26	0113100	10 Ω		3C	J01	2200410	Pin Terminal	1A, B
C06	0661100	10 pF	1C	R27	0113100	10 Ω		3C	J02	2090300	5P Connector Socket	1B
C07	0660221	220 pF	1, 2C	R28	0113102	1.0k Ω		3C	2230126	Push Terminal (Black)		
C08	0669021	1.5 pF	1, 2C	R29	0107100	10 Ω	1/4W C.R.	3C				
C09	0657223	22000 pF	2C	R30	0113682	6.8k Ω	1/4W S.R.	3C				
C10	0657223	22000 pF	2C	R31	0106102	1k Ω		3C				
C11	0669345	10 pF	2C	R32	0106102	1k Ω	1/4W C.R.	3C				
C12	0669345	10 pF	2C	R33	0106562	5.6k Ω		3C				
C13	0669345	10 pF	2C	R34	0106562	5.6k Ω		3C				
C14	0669345	10 pF	2C	R35	0113101	100 Ω		3C				
C15	0657223	22000 pF	2C	R36	0113102	1.0k Ω	1/4W S.R.	3C				
C16	0657223	22000 pF	2C	R37	0113101	100 Ω		3C				
C17	0657223	22000 pF	2C	R38	0106331	330 Ω		3C				
C18	0601397	0.039 μ F	50V M.C.	R39	0106392	3.9k Ω		3C				
C19	0601397	0.039 μ F	50V M.C.	R40	0106152	1.5k Ω	1/4W C.R.	3C				
C20	0657223	22000 pF	3C	R41	0106471	470 Ω		3C				
C21	0657223	22000 pF	3C	R42	0106331	330 Ω		2, 3C				
C22	0657223	22000 pF	3C	R43	0106392	3.9k Ω		3B				
C23	0657473	47000 pF	50V C.C.	R44	0113470	47 Ω	1/4W S.R.	3B				
C24	0660101	100 pF	3C	R45	0106473	47k Ω		3B, C				
C25	0660101	100 pF	3C	R46	0106334	330k Ω		3B				
C26	0660101	100 pF	3C	R47	0106392	3.9k Ω		3B				
C27	0512100	10 μ F	16V E.C.	R48	0106392	3.9k Ω		3B				
C28	0660101	100 pF	3C	R49	0106472	4.7k Ω		2, 3B, C				
C29	0660101	100 pF	3C	R50	0107393	39k Ω	1/4W C.R.	2B, C				
C30	0657223	22000 pF	3C	R51	0106105	1M Ω		2B				
C31	0657223	22000 pF	3C	R52	0106105	1M Ω		2B				
C32	0657223	22000 pF	2C	R53	0106332	3.3k Ω		2C				
C33	0657102	1000 pF	3C	R54	0106332	3.3k Ω		2B				
C34	0513479	4.7 μ F	25V E.C.	R55	0113681	680 Ω		2B, C				
C35	0519103	0.47 μ F	50V E.C.	R56	0113681	680 Ω		2C				
C36	0519103	0.47 μ F	50V E.C.	R57	0113473	47k Ω	1/4W S.R.	2C				
C37	0629001	6800 pF	50V P.C.	R58	0113473	47k Ω		2C				
C38	0513479	4.7 μ F	25V E.C.	R64	0113103	10k Ω		2B				
C39	0601127	0.012 μ F	50V M.C.	R65	0113220	22 Ω		2B				
C40	0601127	0.012 μ F	50V M.C.	R66	0113102	1.0k Ω	1/4W S.R.	2B				
C41	0515109	1 μ F	50V E.C.	R67	0113222	2.2k Ω		2B				
C42	0515109	1 μ F	50V E.C.	R68	0113221	220 Ω		2A, B				
C43	0601226	0.0022 μ F	50V M.C.	R72	0113221	220 Ω		2A				
C44	0601226	0.0022 μ F	50V M.C.	R73	0106222	2.2k Ω	1/4W C.R.	3B				
C45	0519105	2.2 μ F	50V E.C.	R74	0106221	220 Ω		3B				
C46	0519105	2.2 μ F	50V E.C.	R75	0113223	22k Ω		3B				
C47	0512470	47 μ F	16V E.C.	R76	0113472	4.7k Ω		3B				
C57	0657223	22000 pF	50V C.C.	R77	0113331	330 Ω	1/4W S.R.	3B				
C58	0515109	1 μ F	50V E.C.	R78	0113331	330 Ω		3B				
C59	0601227	0.022 μ F	50V M.C.	R79	0113221	220 Ω		3B				
C60	0657473	47000 pF	50V C.C.	R80	0113103	10k Ω		3B				
C61	0657223	22000 pF	50V C.C.	R81	0113102	1.0k Ω		3B				
C62	0512100	10 μ F	16V E.C.	R82	0113102	1.0k Ω		3A, B				
C63	0657223	22000 pF	3B	R83	0113153	15k Ω		3B				
C64	0657223	22000 pF	50V C.C.	R84	0113473	47k Ω	1/4W S.R.	3A				
C65	0657223	22000 pF	3B	R85	0113154							

2-4. Other Parts (Top Side)


331
221

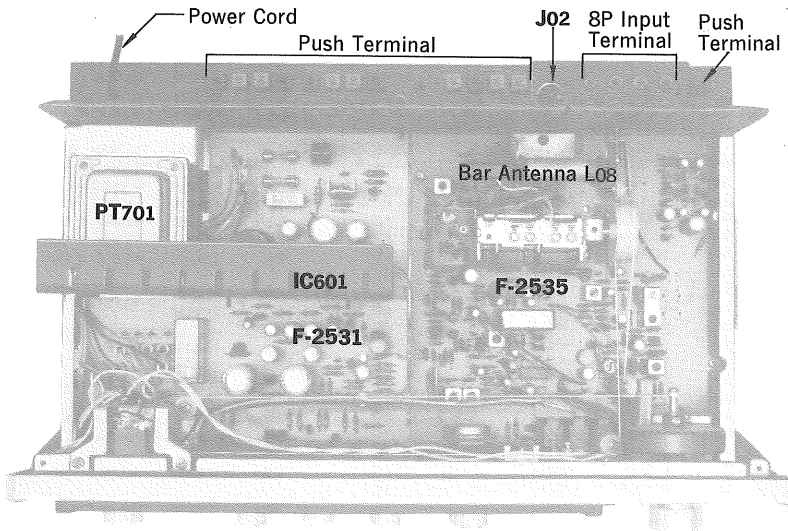


Parts List

Parts No.	Stock No.	Description
PT701	4002230	Power Transformer (331, 331SS)
	4002234	Power Transformer (331L)
	4002220	Power Transformer (221)
CO701	2450060	AC Outlet (331, 331SS, 221)
	3800190	Power Cord (331L)
	3800010	Power Cord (331SS)
	3800261	Power Cord (221, 331)
IC601	{ 0360240	Power IC STK014 (331, 331L, 331SS)
	{ 0360230	Power IC STK013 (221)
L08	{ 4200750	Bar Antenna (331, 221)
	{ 4200740	Bar Antenna (331L)
S701	1131050	LW Antenna Switch (331L)
J01	2200410	8P Input Terminal
J02	2090030	5P Connector Socket
	2230110	Push Terminal (Red)
	2230120	Push Terminal (Black)


331L

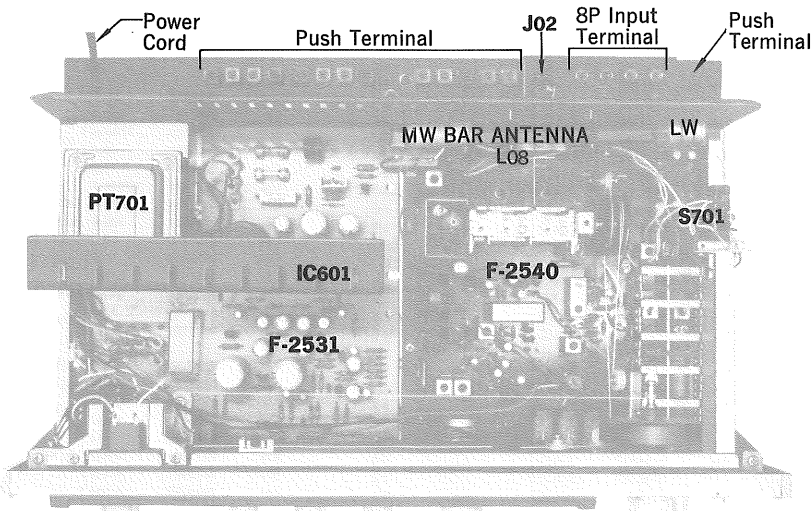

331SS

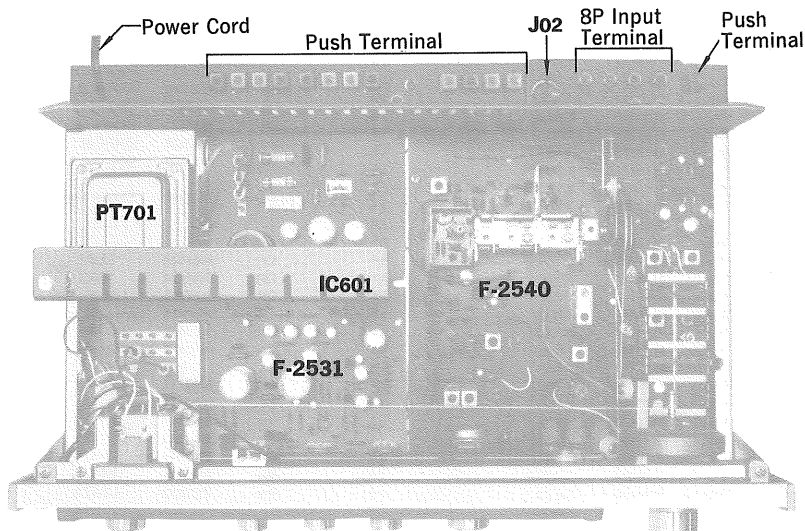

2-5. Other Parts (Front Side)

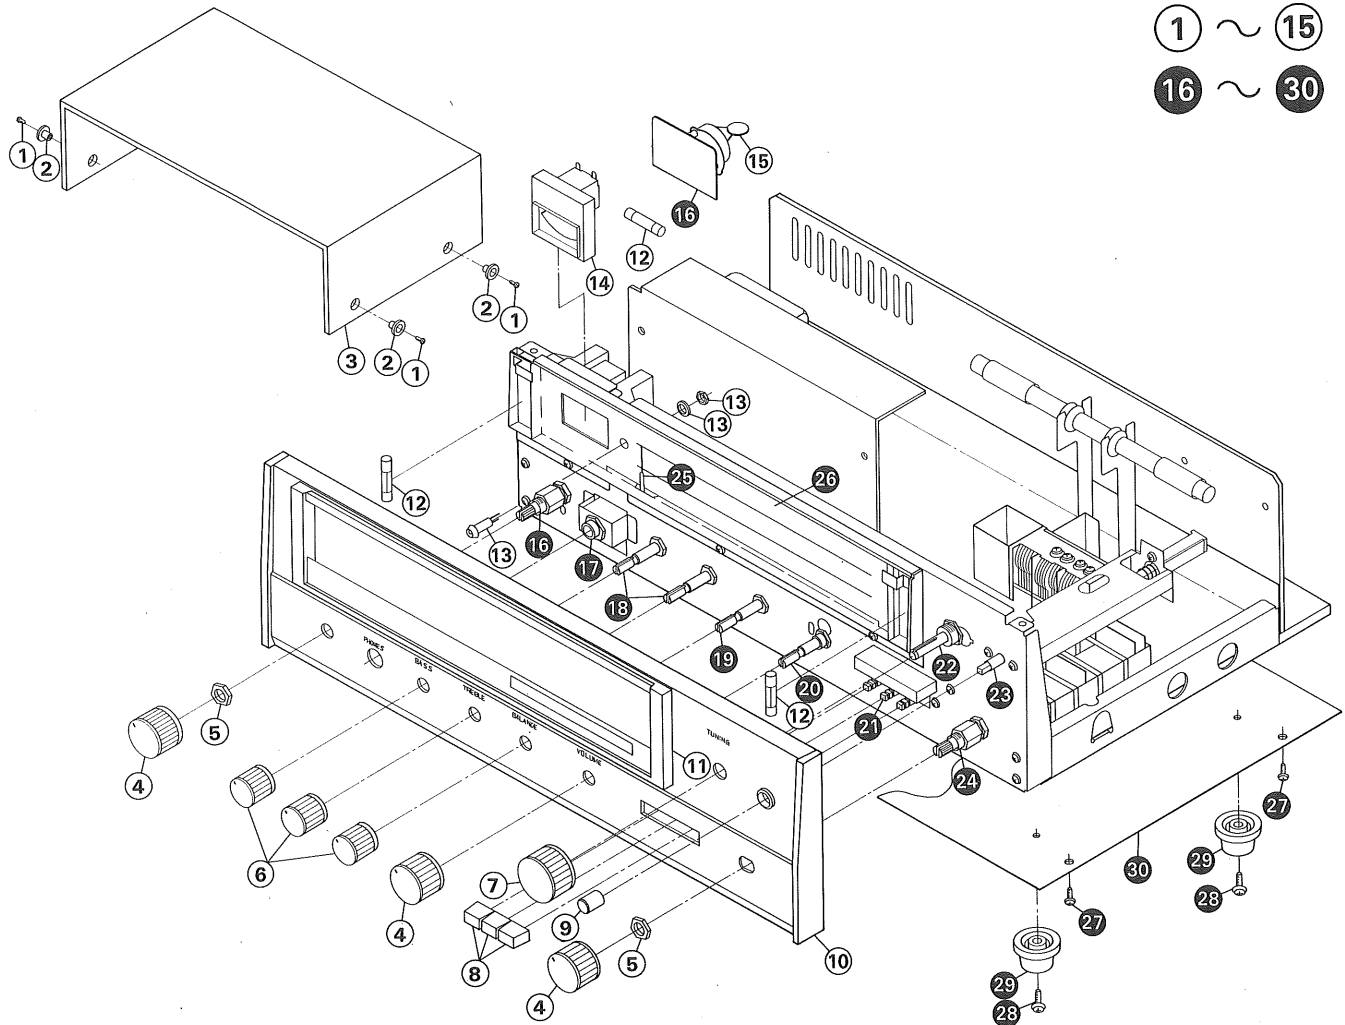

Parts List

Parts No.	Stock No.	Description
1	5166470	Washer Head Tapping Screw, M3×8
2	5236560	Bushing
3	5726912	Wood Bonnet
4	5318220	M-6 Type Knob
5	5110781	Hex. Nut, M9
6	5318210	S-9 Type Knob
7	5318200	T-11 Type Knob
8	5326420	Push Button
9	5326430	Push Button, LM ANT switch (331L only)
10	7007060	Front Panel Ass'y (331)
	7007100	Front Panel Ass'y (221)
	7007111	Front Panel Ass'y (331SS)
	7007120	Front Panel Ass'y (331L)
	5336540	Name Plate (331)
	5336550	Name Plate (331L)
11	5336560	Name Plate (331SS)
	5336570	Name Plate (221)
11	5309600	Frame, dial scale
12	0420040	7V, 320mA Fuse Type Lamp
13	7726080	Light Emitted Diode Ass'y (A)
14	4300820	Signal Meter
15	0659802	Ceramic Capacitor 0.0047μF (Not Included in 331L)


Parts No.	Stock No.	Description
16	1101660	Rotary Switch, POWER (331, 331SS)
	1101710	Rotary Switch, POWER (331L)
	1190210	Rotary Switch, POWER (221)
17	2430240	Headphone Jack
18	1015140, 1	100kΩ(A)×2 BASS, TREBLE Volume
19	1015130, 1	100kΩ(MN)×2 BALANCE Volume
20	1011020, 1	250kΩ(B)×2 VOLUME
21	1131060, 1	Push Switch (3 Stage)
22	7036440	Tuning Ass'y
23	1131050	Push Switch, LW ANT (331L only)
24	1103530	Rotary Switch, SELECTOR (331SS, 331L)
	1101670	Rotary Switch, SELECTOR (331, 221)
25	5416400	Dial Pointer
26	5407871	Dial Scale (331, 221)
	5407881	Dial Scale (331SS)
	5407891	Dial Scale (331L)
27	5109122	Binding Head Tapping Screw, M3×8
28	5166520	Washer Head Tapping Screw, M3×8
29	5516911	Foot
30	5058370	Bottom Plate

3. THREADING OF DIAL CORD

*If a dial cord is cut off or slips, replace it by following procedures.

These units use 0.6mmφ cord, please replace it with the same type certainly.

*The length of dial cord is approximately 170cm (66 inch).

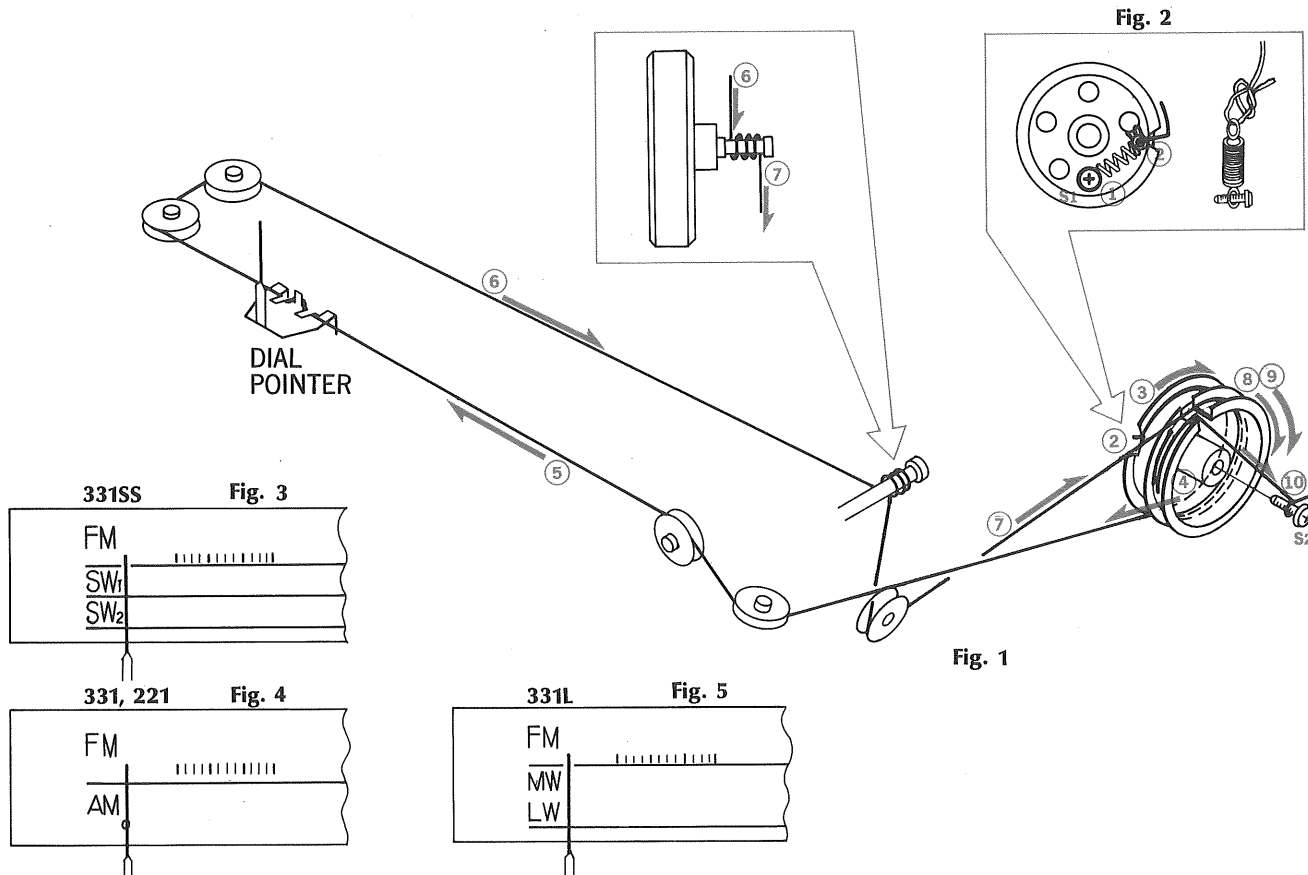

3-1. Threading of Dial Cord

Thread the dial cord in numerical order from ① to ⑩ as Fig. 1.

- 1) Close the variable capacitor completely (Max. capacitance).
- 2) Tie dial cord to the dial spring (Fig. 2).
- 3) Fix the dial spring with screw to S1 of the dial pulley (Fig. 2).
- 4) Thread cord in the direction of arrow from ① to ⑩ (Fig. 1).
- 5) After ⑩, tie the cord to the screw S2 of the dial pulley (Fig. 1)

*To strengthen the dial cord's tension, hold the end of cord, then pull it toward the front panel.

Turn tuning shaft counterclockwise so that the cord's tension will be more obtained.

*After procedure 5), lock the knots of the cord and the screws, S1, S2 with paint.

3-2. Attachment of Dial Pointer

- 1) Close the variable capacitor completely.
- 2) Set the dial pointer to the position on dial scale as shown in Fig. 3~5.


*Confirm that the dial pointer runs smoothly on the dial scale by turning the tuning shaft.

Stock No.	Description
6036050	Dial cord (0.6mmφ)
6906461	Spring
6146700	Dial pulley (D-35)

4. ALIGNMENTS

4-1. FM Alignment

Note: IF alignment Connect the output of genescope to TP01 through 100pF ceramic capacitor

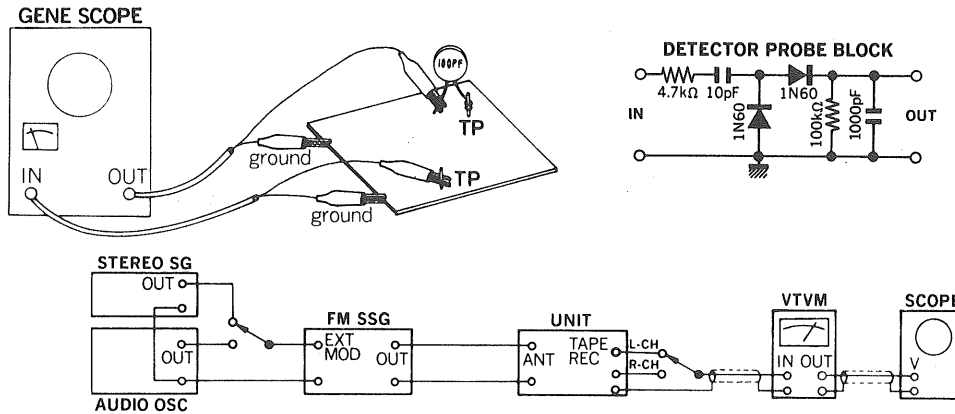


STEP	SUBJECT	STEP	FEED SIGNAL		MEASURE OUTPUT	ADJUST	ADJUST FOR
			FROM	TO			
1.	FM IF Alignment F-2535 Fig. 4-4 F-2540 Fig. 4-5	1. IF Coil	Output 100dB Genescope	TP01 F-2540 or F-2535	TP03 F-2540 or F-2535 Use Detector probe	T01 F-2540 or F-2535	MAX. IF Waveform 1 as Fig. 4-3
		2. Meter Coil	Output 70dB Genescope	Same as above	TP06 F-2540 or F-2535	T04 F-2540 or F-2535	MAX. IF Waveform 2 as Fig. 4-3
		3. Discrimi- nator Coil	Same as above	Same as above	TP05 F-2540 or F-2535	T03 F-2540 or F-2535	MAX. linearity of S curve (Fig. 4-3)
2.	FM Dial Calibration and RF Alignment F-2535 Fig. 4-4 F-2540 Fig. 4-5	1. Dial Caribration 90MHz	ANT Input 400Hz (100% MOD) 60dB FM SSG 90 or 106MHz	ANT Terminal 300Ω	REC OUT L or R-CH VTVM & SCOPE	L03 F-2540 or F-2535	MAX. Output
		106MHz				TC01 F-2540 or F-2535	
		2. RF Adj 90MHz	ANT Input 400Hz (100% MOD) 50dB FM SSG 90 or 106MHz	ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	L01, L02 F-2540 or F-2535	MAX. Output
		106MHz				VT01 f, VT01 h F-2540 or F-2535	
3.	MPX Alignment F-2535 Fig. 4-4 F-2540 Fig. 4-5		98MHz ANT Input 60dB FM SSG Pilot 19kHz (10% MOD) L-CH 1kHz (40% MOD) R-CH (0% MOD) Stereo SG	ANT Terminal 300Ω	REC OUT R-CH VTVM & SCOPE	L05 F-2540 or F-2535	Separation: Over than 27dB Confirm Separation: R→L Over than 27dB

* Signal Meter 4.3 on Meter (98MHz ANTENNA
Input 60dB 400Hz 100% MOD)
Indicator level 25dB

Abbreviation	
AM Standard Signal Generator	AM SSG
FM Stereo Generator	Stereo SG
Audio Oscillator	Audio OSC
AM FM Generator Oscilloscope	Genescope
FM Standard Signal Generator	FM SSG
Oscilloscope	Scope

4-2. AM Alignment

- Note:** 1. Selector.....AM (MW, SW, or LW)
 2. Confirm start point of dial pointer before alignment.
 3. In case of using loop antenna, increase output of AM SSG for 26dB than bar antenna's direct input as it attenuates input sensitivity for 26dB

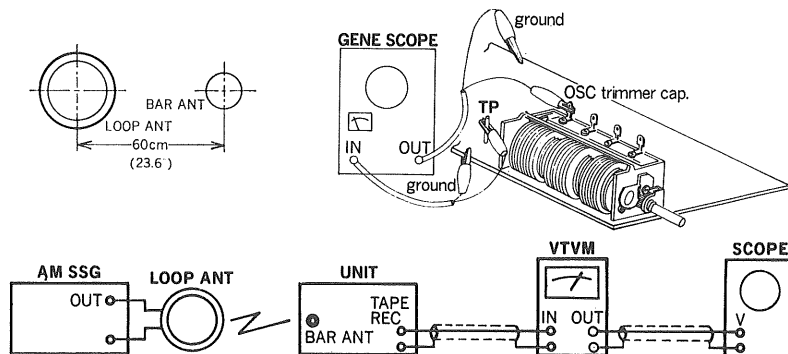

STEP	SUBJECT	STEP	FEED SIGNAL		MEASURE OUTPUT	ADJUST	ADJUST FOR	
			FROM	TO				
1.	MW IF, Dial Calibration and RF F-2535....Fig. 4-4 F-2540....Fig. 4-5 MODEL 331 331L 221	1. IF Coil	Output 70dB Genescope	OSC Trimmer Cap VT01i F-2535 VC01 F-2540	TP7 F-2535 or F-2540	T05 F-2535 or F-2540	MAX. IF Waveform (Fig. 4-1)	
			Output 60dB Genescope			T06, T07 F-2535 or F-2540	MAX. IF Waveform (Fig. 4-2)	
		2. Dial Calibration 600kHz	ANT Input 60dB 400Hz (30% MOD) AM SSG 600 or 1400kHz	MW ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	L06 F-2535 L12 F-2540	MAX Output	
			1400kHz			VT01i F-2535 TC05 F-2540		
		3. RF Adj 600kHz	ANT Input 60dB 400Hz (30% MOD) AM SSG 600 or 1400kHz	MW ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	Bar Antenna	MAX Output	
			1400kHz			VT01g F-2535 TC02 F-2540		
2.	SW IF, Dial Calibration and RF F-2535....Fig. 4-4 F-2450....Fig. 4-5 MODEL 331SS	1. IF Coil (Selector Switch SW1)	Output 95dB Genescope	OSC Trimmer Cap VC01 F-2540	TP7 F-2540	T05 F-2540	MAX. IF Waveform (Fig. 4-1)	
			Output 80dB Genescope				T06 F-2540	MAX. IF Waveform (Fig. 4-2)
			Output 70dB Genescope				T07 F-2540	
		2. Dial Calibra- tion SW1 { 2.5MHz 6.5MHz	ANT Input 60dB 400Hz (30% MOD) AM SSG 2.5 or 6.5MHz	AM ANT Terminal	REC Out L or R-CH VTVM & SCOPE	L12 F-2540	MAX Output	
			7MHz 16 MHz			TC05 F-2540 L13 F-2540 TC06 F-2540		
		3. RF Adj SW1 { 2.5MHz 6MHz	ANT Input 50dB 400Hz (30% MOD) AM SSG 2.5 or 6MHz	AM ANT Terminal	REC Out L or R-CH VTVM & SCOPE	L06 F-2540	MAX	
			7MHz 16 MHz			TC02 F-2540 L07 F-2540 TC03 F-2540		

STEP	SUBJECT	STEP	FEED SIGNAL		MEASURE OUTPUT	ADJUST	ADJUST FOR	
			FROM	TO				
3.	LW IF, Dial Calibration and RF F-2535... Fig. 4-4 F-2540... Fig. 4-5 MODEL 331L	1. IF Coil	Output 70dB Genescope	OSC Trimmer Cap VC01 F-2540	TP7 F-2540 or F-2535	TC05 F-2540	MAX. IF Waveform (Fig. 4-1)	
			Output 60dB Genescope				T06, T07 F-2540	MAX. IF Waveform (Fig. 4-2)
		2. Dial Calibration 170kHz	320kHz	ANT Input 70dB 400Hz (30% MOD) AM SSG 170 or 320kHz	LM/MW EXT Bar ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	L13 F-2540	MAX. Output
							TC06 F-2540	
		3. RF Adj 170kHz	320kHz	ANT Input 65dB 400Hz (30% MOD) AM SSG 170 or 320kHz	LM/MW EXT Bar ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	LW Bar Antenna	MAX. Output
							TC04 F-2540	
		170kHz	320kHz	ANT Input 65dB 400Hz (30% MOD) AM SSG 170 or 320kHz	LM EXT ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	L07 F-2540	MAX. Output
							TC03 F-2540	
		4. 460kHz Dip Filter (Selector) MW		ANT Input 400Hz (30% MOD) AM SSG 100dB 460kHz Dial pointer 1000kHz..MW	LM/MW EXT Bar ANT Terminal	REC OUT L or R-CH VTVM & SCOPE	L10, L11 F-2540	MIN. Output

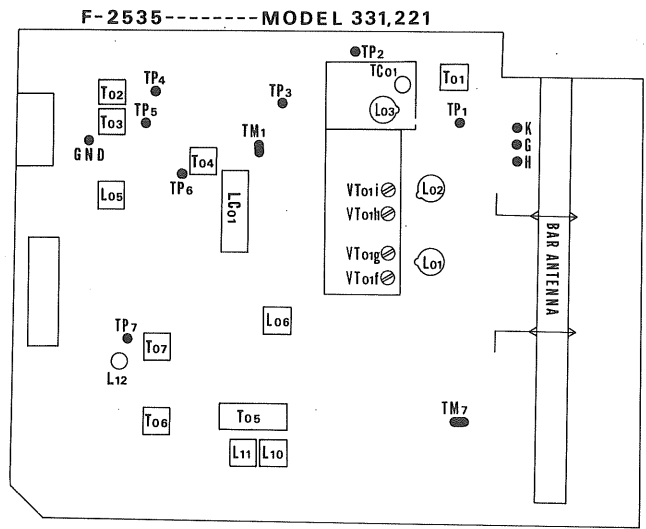
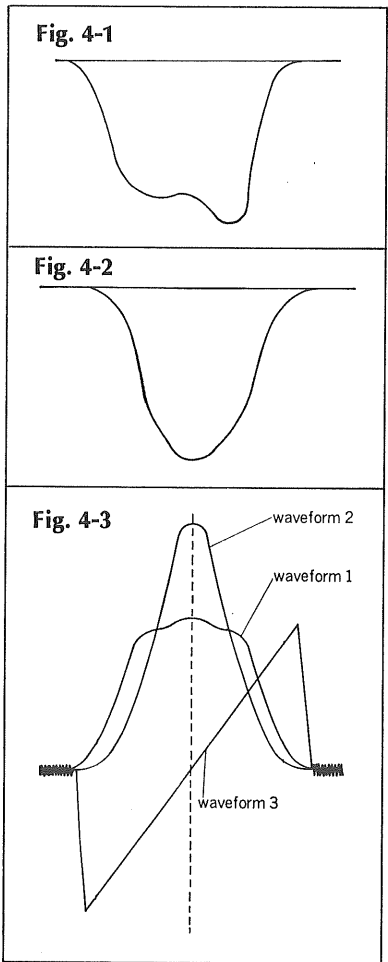


Fig. 4-4

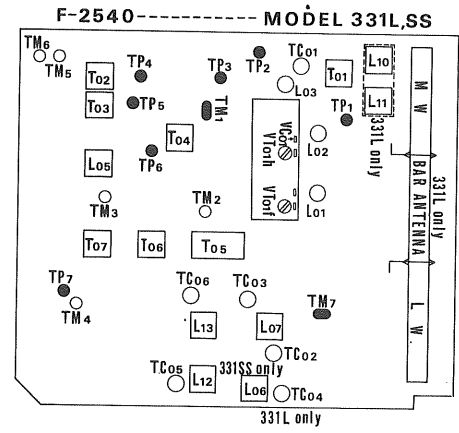


Fig. 4-5

5. TROUBLESHOOTING CHART

5-1. Troubleshooting on Audio Section

1. Trouble on Power Amplifier

Symptom	Cause
1-1. Power supply section inoperative	<ul style="list-style-type: none"> 1. Defective power switch, S601 2. Power fuse, F-605 opens 3. Defective Diode, D601~D604 4. Quick acting fuse F-604, opens
1-2. Power amplifier section inoperative	<ul style="list-style-type: none"> 5. Shorted speaker terminals by speaker wires 6. Imperfect contact of speaker selector switch, S601 7. Defective IC601 or IC602
2. Trouble on Tone Control Section	<ul style="list-style-type: none"> 8. Shorted C601 on F-2531 9. Opens TR601 on F-2531 10. Defective TR01 or TR02 on F-2531
3. Trouble on Phono Circuit Section	<ul style="list-style-type: none"> 11. Imperfect contact of mode switch, tape monitor switch or selector switch 12. Defective TR15~TR18 on Equalizer circuit 13. Defective input capacitor C101 or C102 on Equalizer circuit

5-2. Troubleshooting on Tuner Section

1. FM and AM inoperative

1-1. No voltage supplied to each section	<ul style="list-style-type: none"> 1. Defective TR602 on F-2531 2. Imperfect contact of selector switch
1-2. Imperfect contact of selector switch	<ul style="list-style-type: none"> 3. AM and FM output signal not supplied to audio section

2. Inoperative FM section

F-2535 (Tuner & Equalizer circuit board).....MODEL 331, 221
 F-2540 (Tuner & Equalizer circuit board).....MODEL 331L, 331SS

2-1. FM tuner inoperative	
1) signal meter inoperative (No output signal at checkpoint, TP4)	<ul style="list-style-type: none"> 4. IF or RF out of adjustment 5. Defective FET01 or TR01~TR05 6. Antenna coil, osc coil or IF coil open 7. Weak input signal at FM antenna terminal
2) Signal meter operative (No output signal at checkpoint TP5)	<ul style="list-style-type: none"> 8. Defective IC01 9. T02 or T03 out of adjustment 10. T02 or T03 open 11. Defective D01 or D02
2-2. MPX inoperative	<ul style="list-style-type: none"> 12. Defective IC02 13. Defective TR07, TR08
2-3. No channel separation on FM Stereo broadcasting	<ul style="list-style-type: none"> 14. 19kHz coil, L05 open 15. 19kHz coil, L05 out of adjustment 16. Low input MPX signal 17. Defective IC02
2-4. Stereo indicator lamp not lighted	<ul style="list-style-type: none"> 18. Defective MPX indicator, LED. D01 19. Defective IC02
2-5. Signal meter inoperative (FM broadcasting sound can be heard)	<ul style="list-style-type: none"> 20. Defective TR06 21. T04 out of adjustment or open 22. Defective D03, D04 or D09 23. Defective signal meter


5-3. Inoperative AM Section

1. MW, SW, or LW circuit section inoperative


1-1. Signal meter inoperative (Signal meter circuit operative)	<ul style="list-style-type: none"> 1. IF or RF out of adjustment 2. Defective TR09~TR12 3. Antenna coil, OSC coil or IF coil open 4. Weak input signal at each antenna terminal 5. Imperfect contact of selector switch
1-2. Signal meter circuit inoperative	<ul style="list-style-type: none"> 6. Defective TR13 7. Defective D08 or D09 8. Defective signal meter

5-4. Operation Block Diagram


1) Audio Section

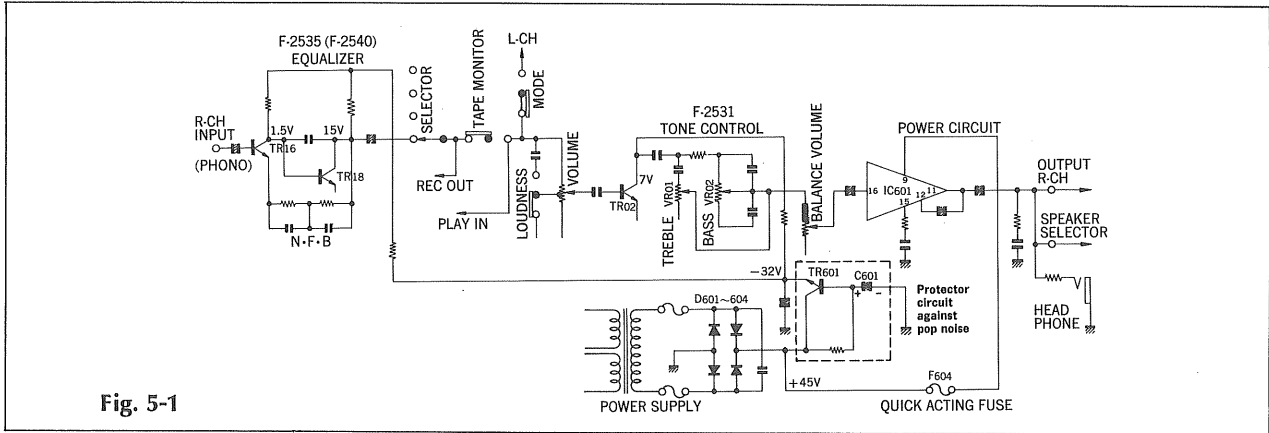

2) Tuner Section AM-FM Block Diagram

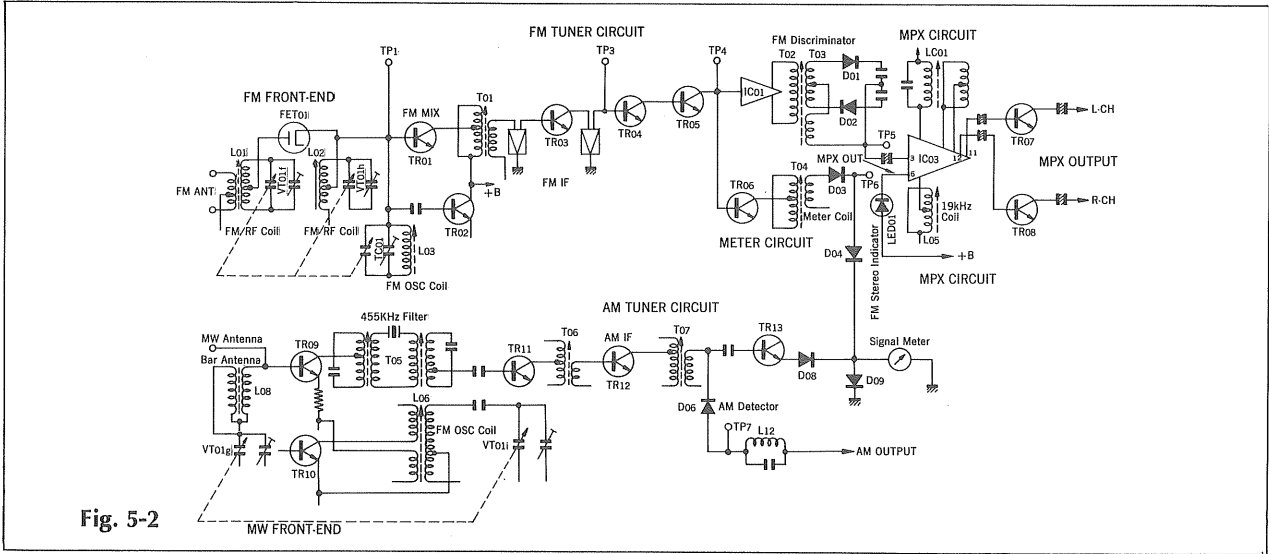


3) SW & LW Front-end Block Diagram

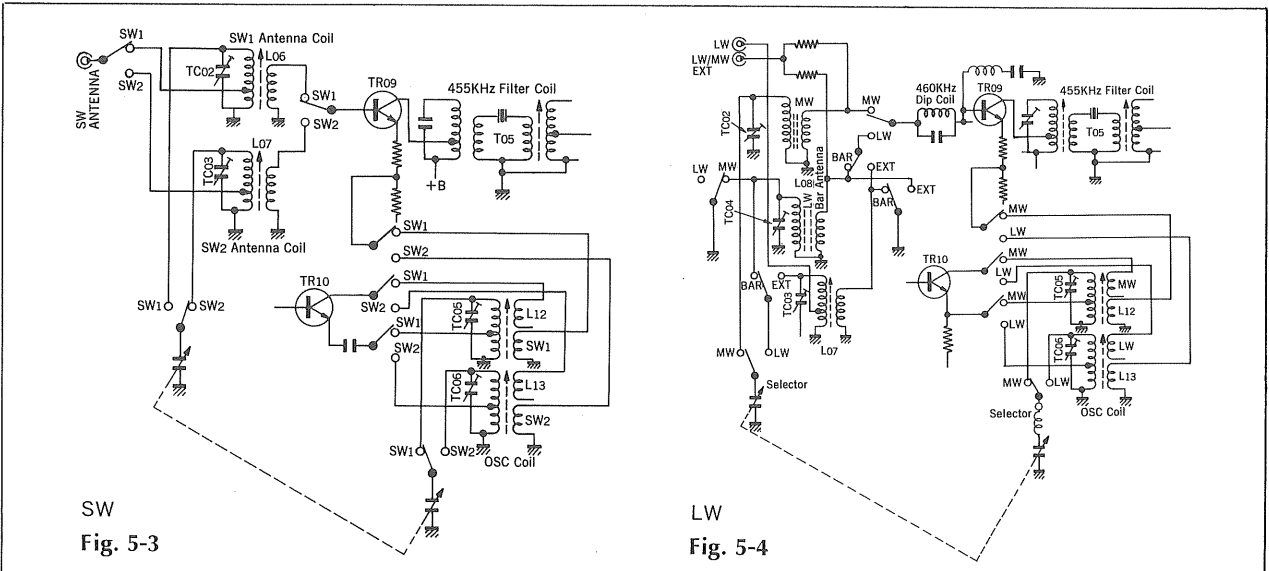


6. BLOCK DIAGRAM

F-2535 (M: 331, 221) F-2540 (M: 331, 331SS, 331L) F-2531 (M: 331, 331SS, 331L, 221)

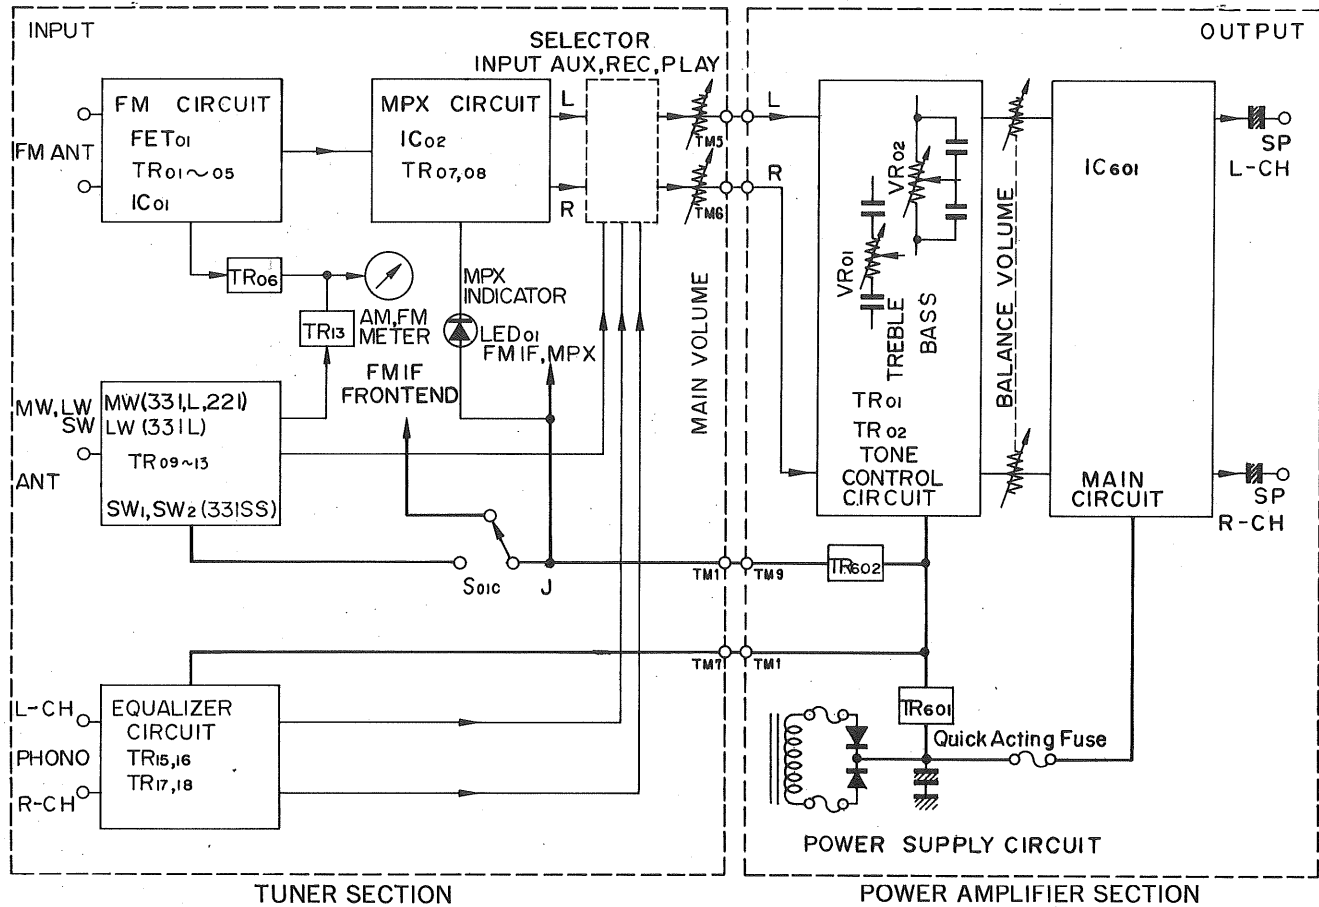


IC STK-014 STK-013 BLOCK DIAGRAM

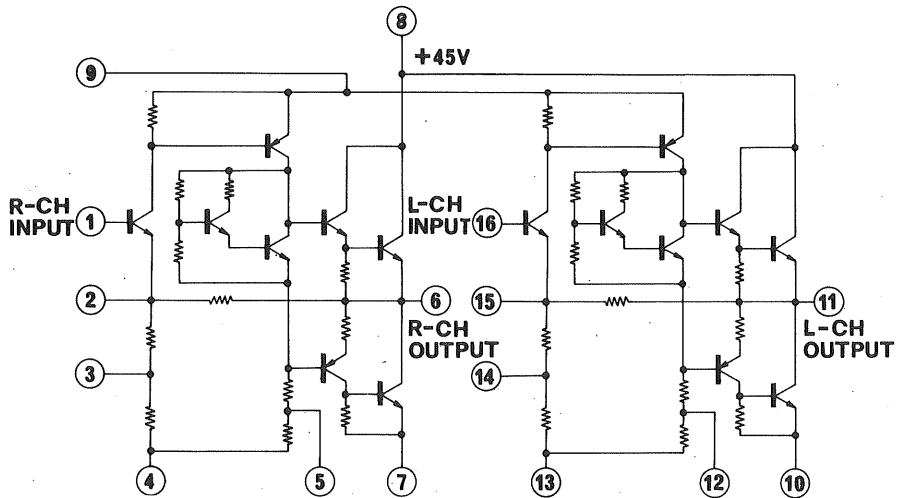

8. PACKING LIST

Parts No.	Stock No.	Description
1	9116640	Vinyl Cover
2	9027870	Stylofoam Packing
3	9008260	Carton Case (331L)
	9008270	Carton Case (331SS)
	9008280	Carton Case (331L)
	9008290	Carton Case (221)
4	5996080	Curl Stopper

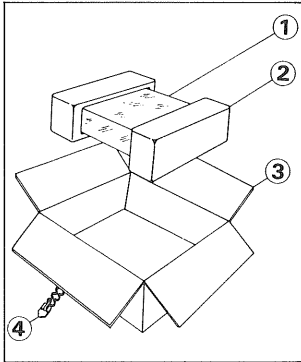

9. ACCESSORY PARTSLIST

Parts No.	Stock No.	Description	Position
	3820090, 1	FM Antenna	
	3820110	SW Antenna (331SS only)	
}	9208820	Operating Instruction (331)	
	9208830	Operating Instruction (331SS)	
}	9208840	Operating Instruction (331)	
	9208850	Operating Instruction (221)	




SANSUI ELECTRIC CO., LTD.
14-1, 2-chome, Izumi, Suginami-ku, Tokyo 168, Japan.
TELEPHONE: (03) 323-1111/TELEX: 232-2076

SM043

Printed in Japan (85520M)

7-3. SANSUI 331L Schematic Diagram


* Design and specifications subject to change without notice for improvements.

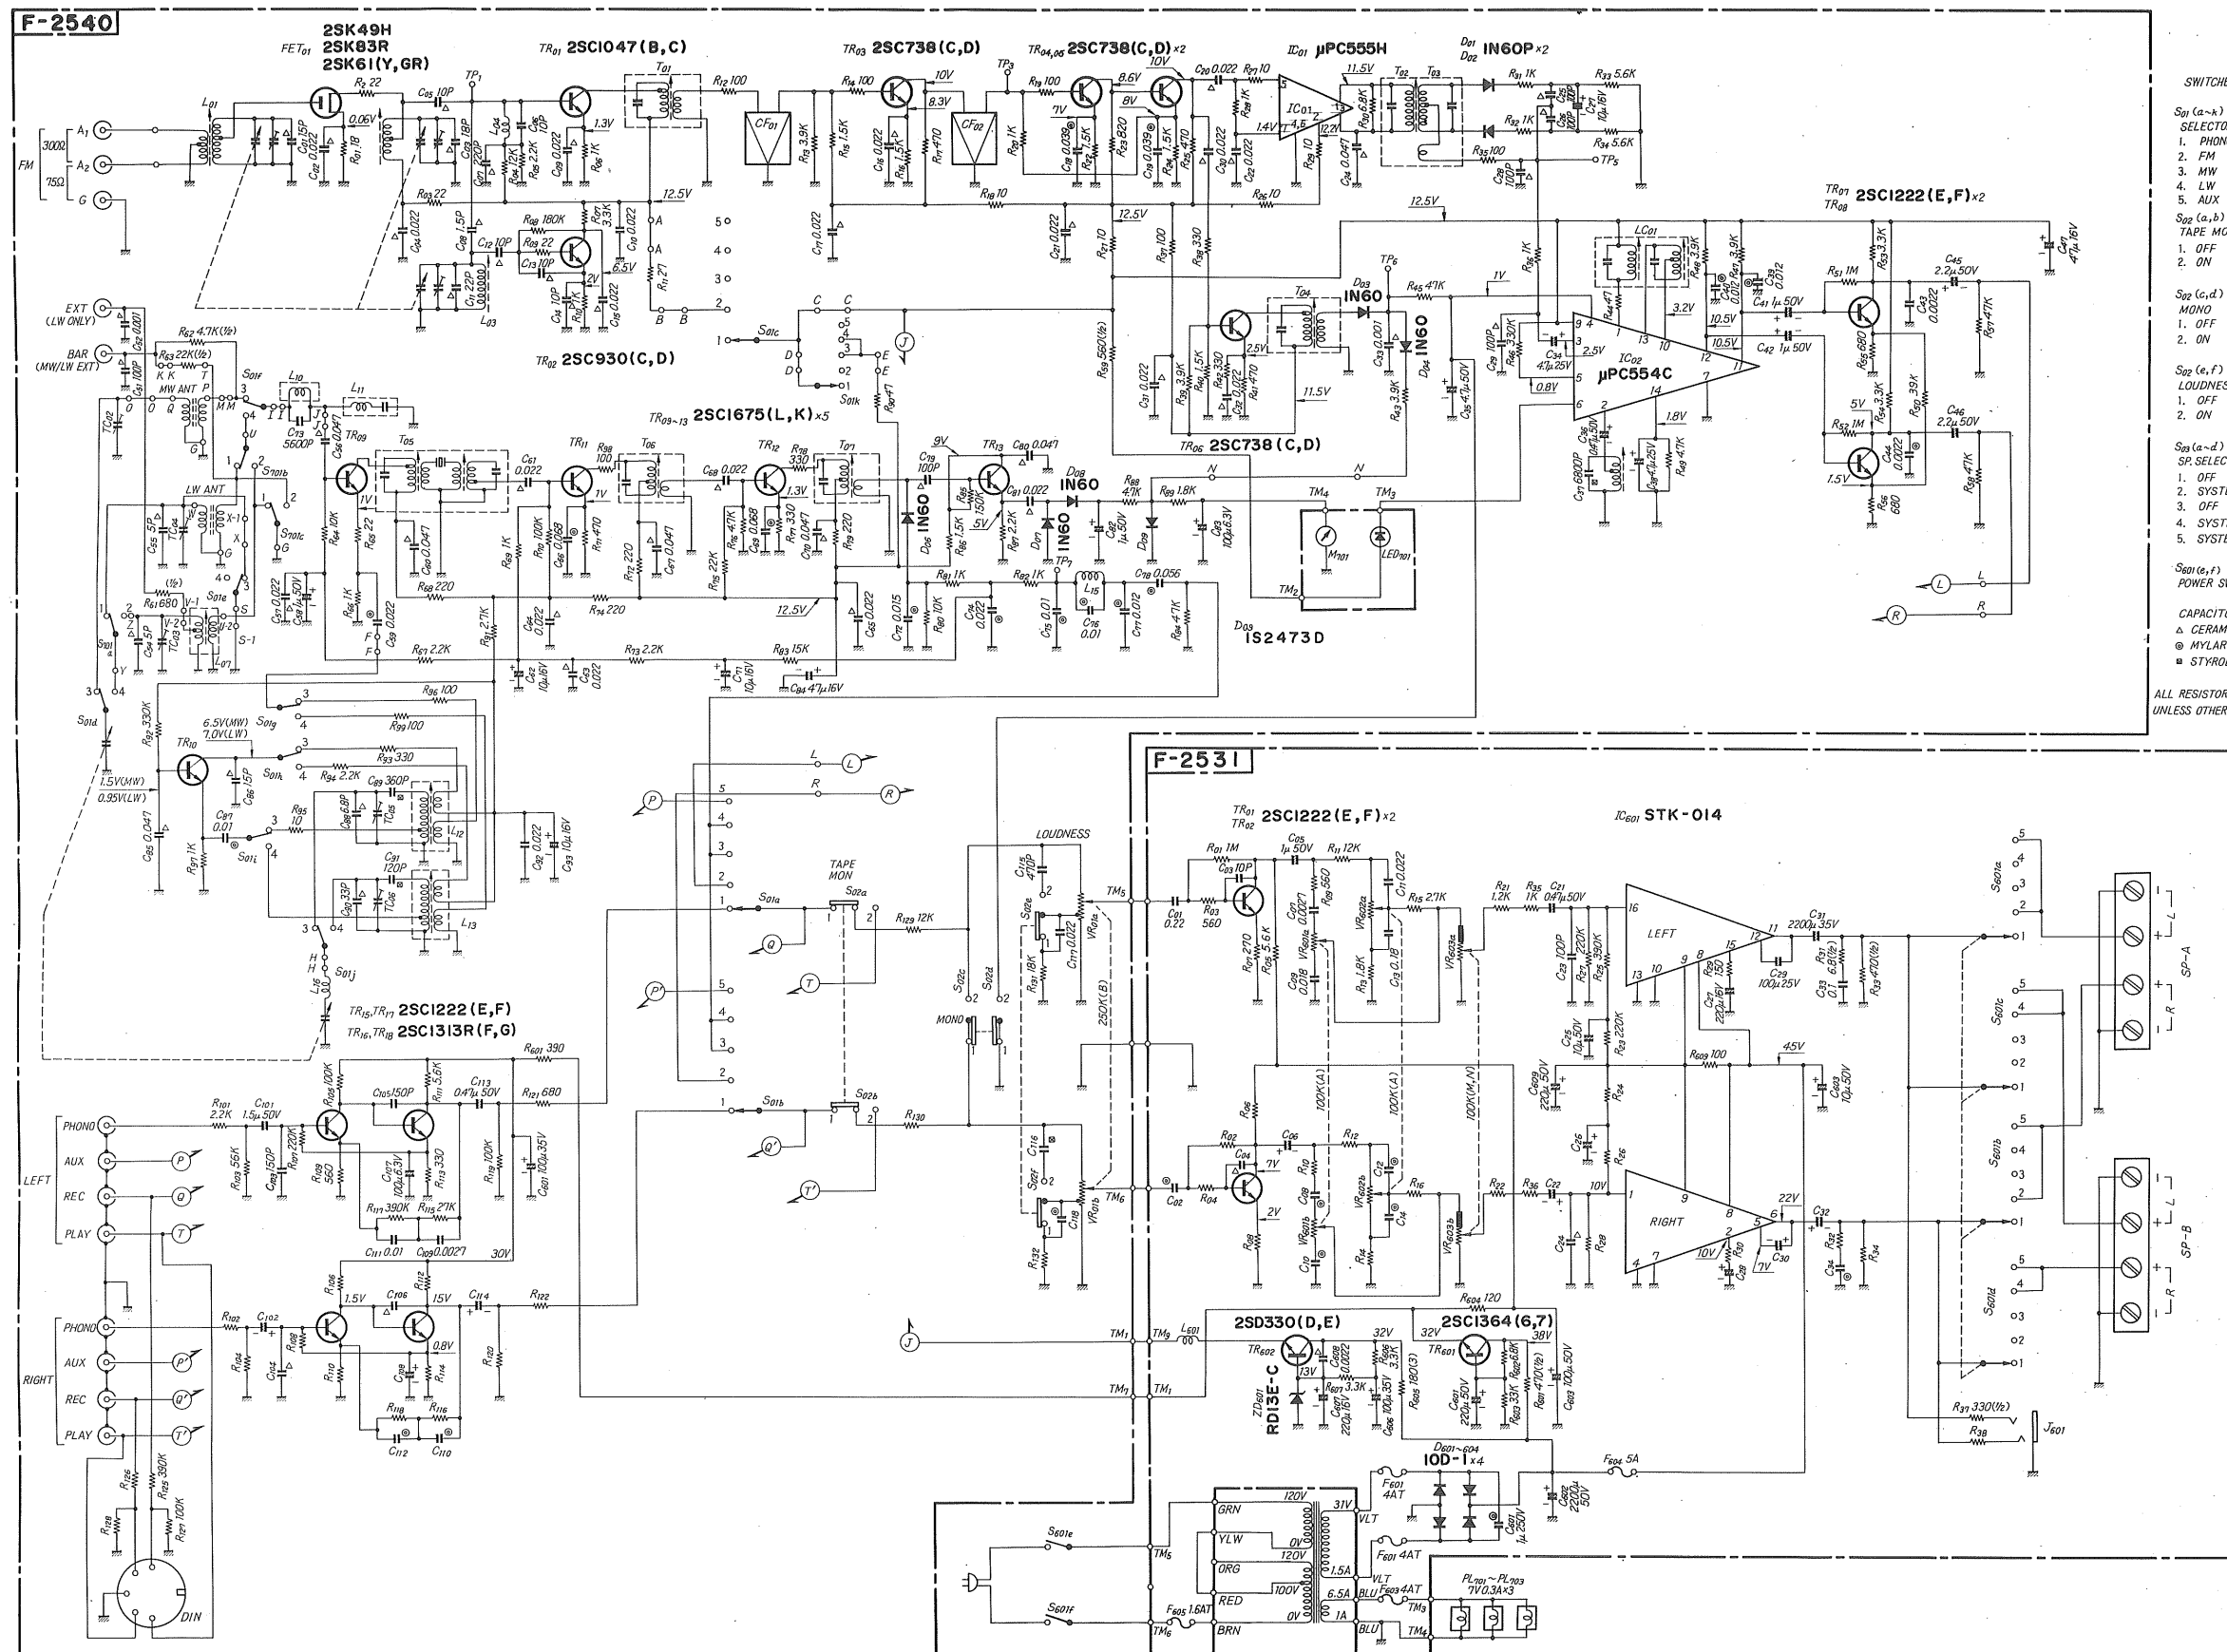

- SWITCHES**
- S₀₁ (a-b) SELECTOR
 - S₀₁ (c-d) LW ANT
 - 1. PHONO
 - 2. FM
 - 3. MW
 - 4. LW
 - 5. AUX
 - S₀₂ (a,b) TAPE MON
 - 1. OFF
 - 2. ON
 - S₀₂ (c,d) MONO
 - 1. OFF
 - 2. ON
 - S₀₂ (e,f) LOUDNESS
 - 1. OFF
 - 2. ON
 - S₀₃ (a-d) SP. SELECTOR
 - 1. OFF
 - 2. SYSTEM.A
 - 3. OFF
 - 4. SYSTEM.B
 - 5. SYSTEM.A+B
 - S₀₄ (e,f) POWER SW
- CAPACITOR**
- △ CERAMIC
 - MYLAR
 - STYROL
- ALL RESISTORS IN WATT UNLESS OTHERWISE NOTED

7-2. SANSUI 331 Schematic Diagram

* Design and specifications subject to change without notice for improvements.

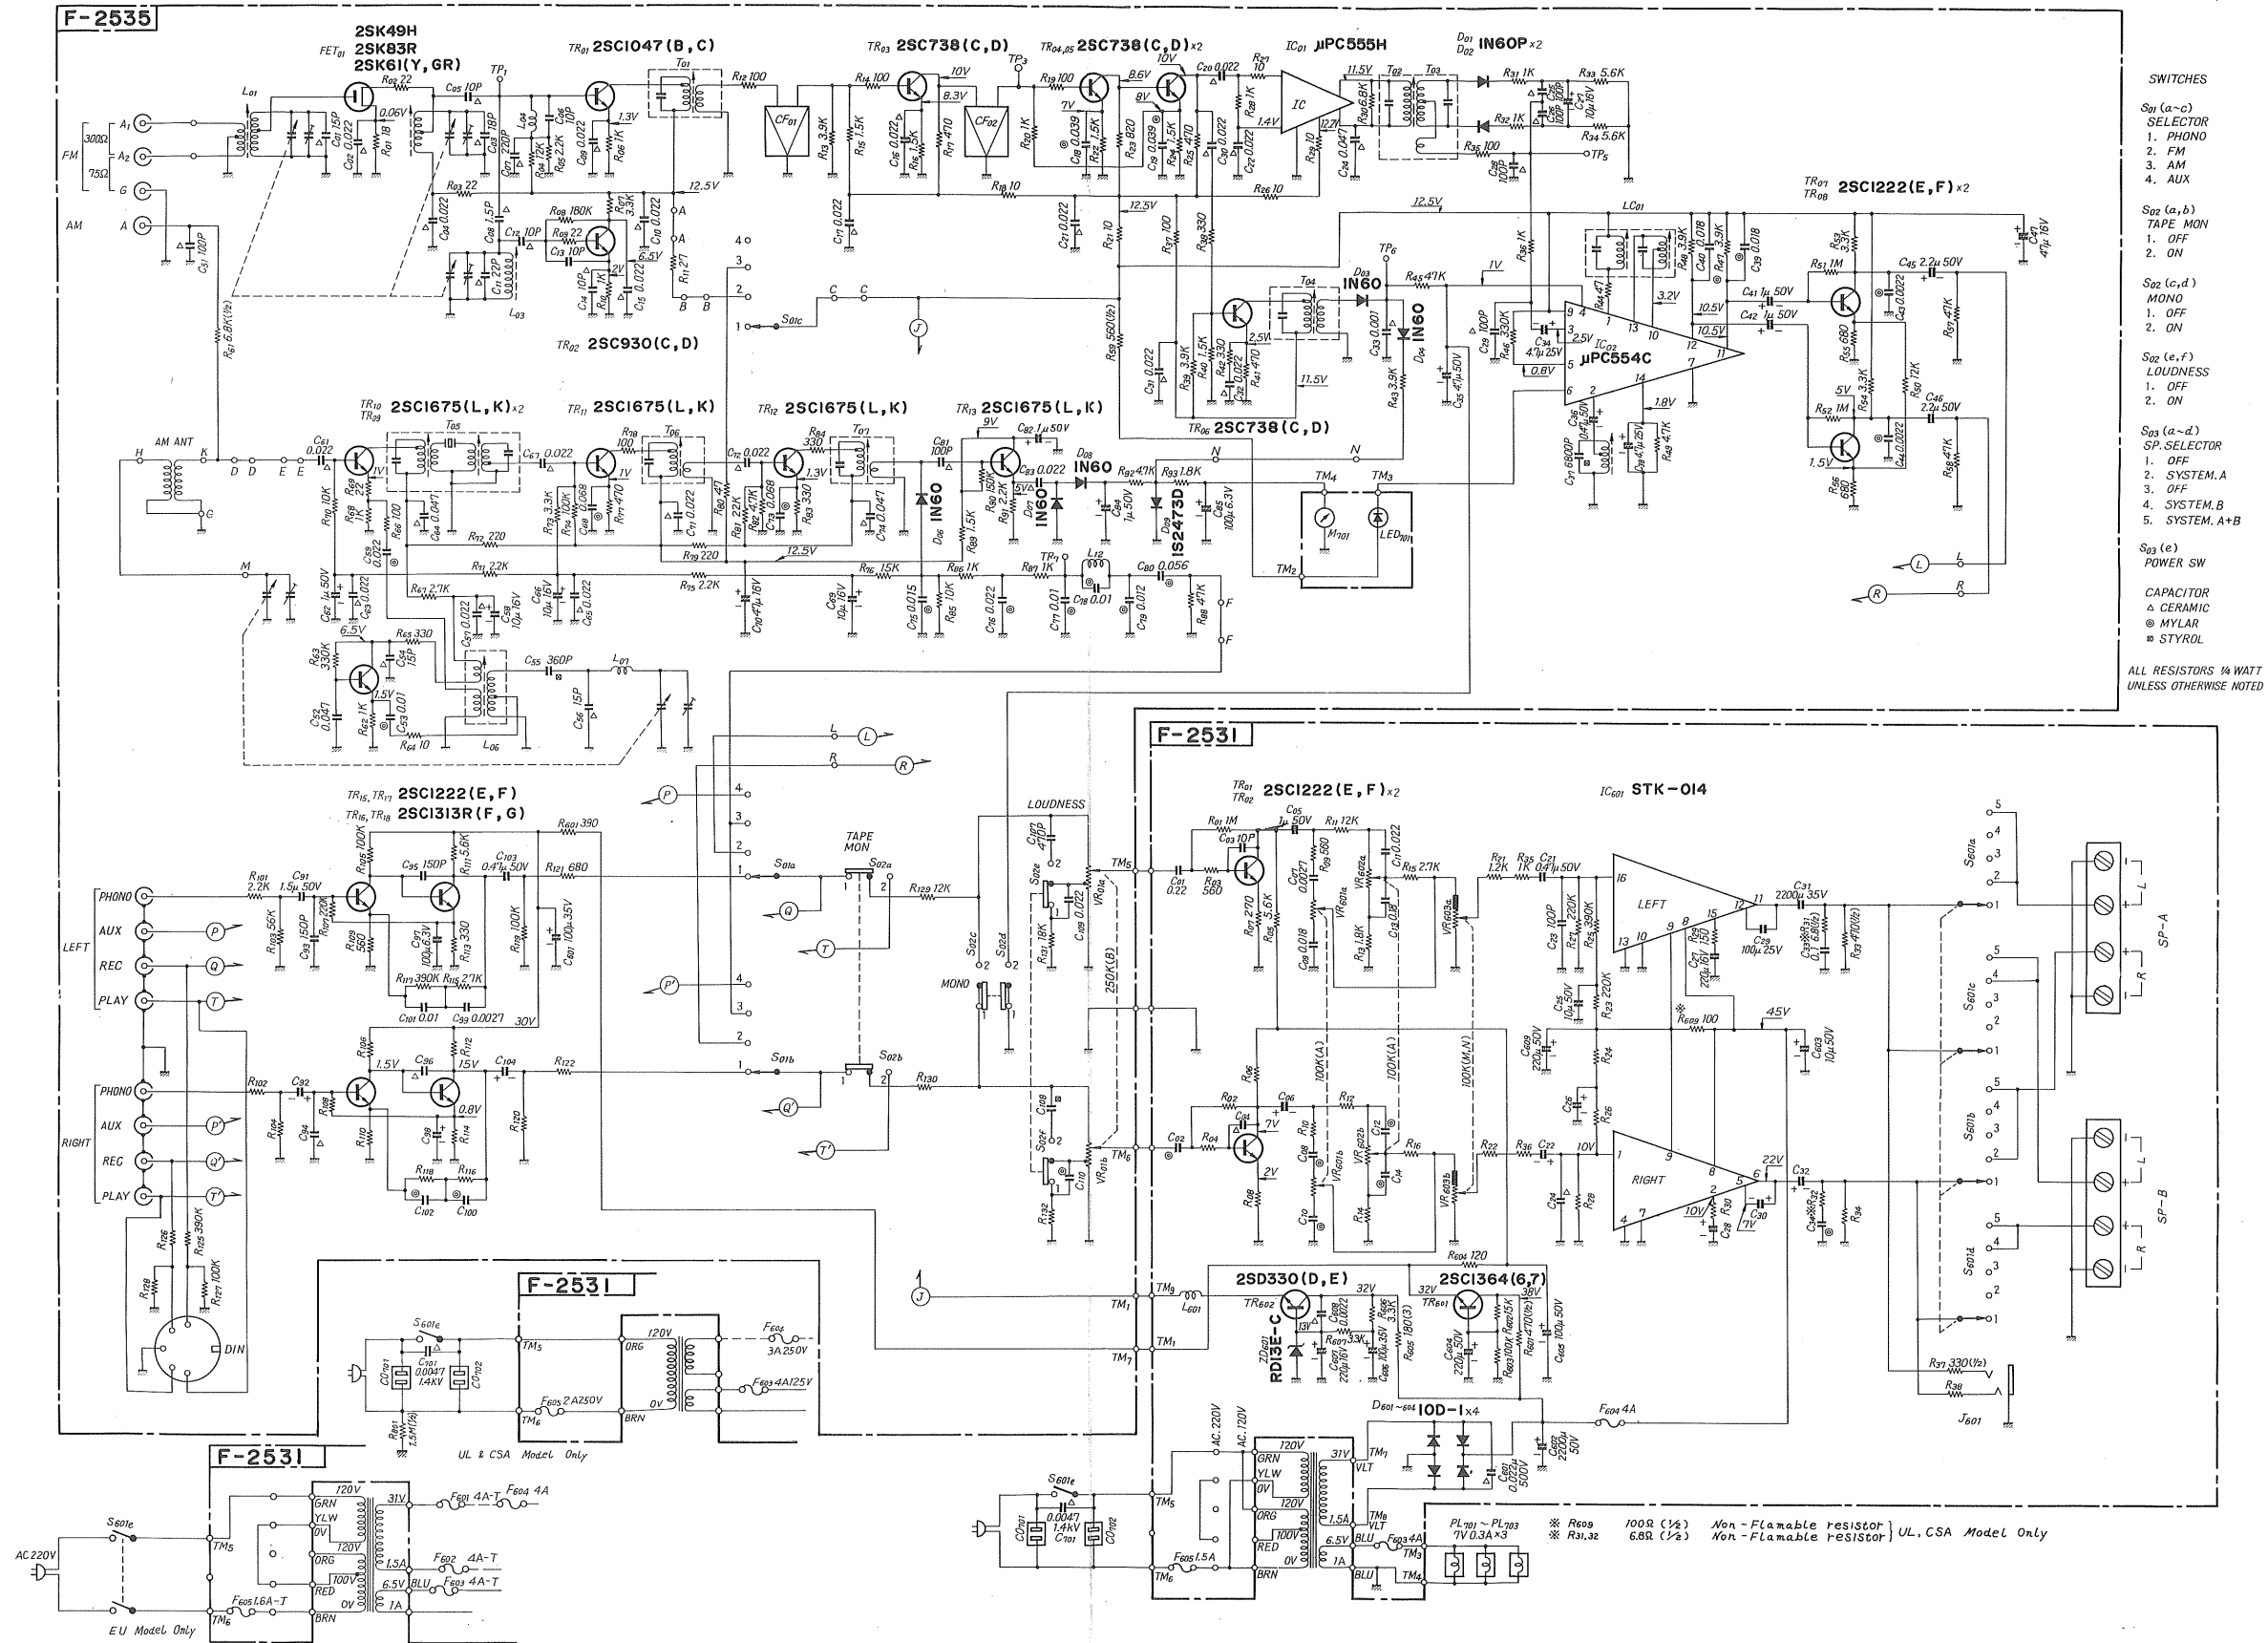

7. SCHEMATIC DIAGRAM

7-1. SANSUI 221 Schematic Diagram

* Design and specifications subject to change without notice for improvements.

