

# CDP-791/X111ES

## SERVICE MANUAL

US Model  
Canadian Model  
CDP-X111ES  
AEP Model  
UK Model  
CDP-791



Photo: CDP-791

### SPECIFICATIONS

#### Compact disc player

Frequency response	2 Hz - 20 kHz $\pm$ 0.5 dB
Signal-to-noise ratio	More than 108 dB
Dynamic range	More than 98 dB
Harmonic distortion	Less than 0.0027%
Channel separation	More than 100 dB

#### Outputs

LINE OUT (FIXED) (phono jacks)	Output level 2 V (at 50 kilohms) Load impedance over 10 kilohms
LINE OUT (VARIABLE) (phono jacks)	Output level max. 2 V (at 50 kilohms) Load impedance over 50 kilohms
DIGITAL OUT (OPTICAL) (optical output connector)	Wave length 660 nm Output level - 18 dBm
PHONES (stereo phone jack)	Output level max. 10 mW Load impedance 32 ohms

#### General

Power requirements	US, Canadian Model: 120 V AC, 60 Hz AEP Model: 220 V - 230 V AC, 50/60 Hz UK Model: 240 V AC, 50 Hz
--------------------	--

Model Name Using Similar Mechanism	CDP-291/391
CD Mechanism Type	CDM14-5BD1
Optical Pick-Up Block Type	BU-5BD1

Power consumption	12 W
Dimensions (approx., including projections)	430 $\times$ 110 $\times$ 280 mm (w/h/d) (17 $\times$ 4 3/8 $\times$ 11 1/8 inches)
Weight (approx.)	4.0 kg (8 lbs 14 oz)

#### Supplied accessories

Audio cord	1 (2 phono plugs - 2 phono plugs)
Remote commander	1
R6 (AA) batteries	2

#### Remote commander RM-D791

Remote control system	Infrared control
Power requirements	3 V DC with two R6 (size AA) batteries
Dimensions	Approx. 62 $\times$ 20 $\times$ 175 mm (w/h/d) (1 3/8 $\times$ 1 1/8 $\times$ 7 inches)
Weight	Approx. 130 g (4.6 oz) Including batteries

Design and specifications subject to change without notice.



COMPACT DISC PLAYER  
**SONY**<sup>®</sup>

## SAFETY CHECK-OUT


After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

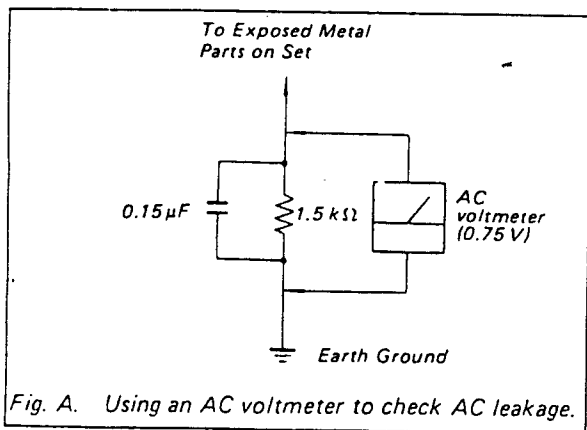


#### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\triangle$  OR DOTTED LINE WITH MARK  $\triangle$  ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

### MODEL IDENTIFICATION

—Model Number Label—

CDP-791  
CDP-X111ES

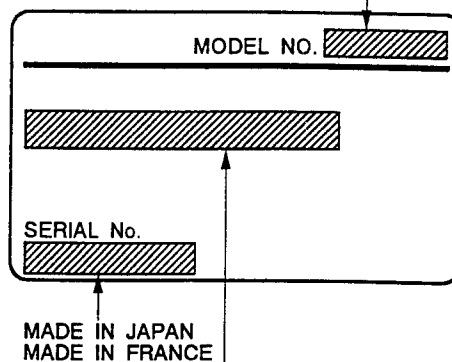

US Model: AC120V 60Hz 12W  
 Canadian Model: AC: 120V 60 Hz 12W  
 AEP Model: AC220 - 230V, 50/60Hz  
 UK Model: AC240V-50/ 60Hz

### TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	Specifications .....	1
	Safety Check-out .....	2
	Model Identification .....	2
<b>1.</b>	<b>GENERAL</b>	
	Notes on Handling the Optical Pick-up	
	Block or Base Unit .....	3
	Notes on Laser Diode Emission Check .....	3
	Location of Controls .....	3
	Adjusting Operating Voltage .....	3
<b>2.</b>	<b>DISASSEMBLY</b> .....	4
<b>3.</b>	<b>ELECTRICAL BLOCK CHECKING</b>	
	S Curve Check .....	5
	RF Level Check .....	5
	E-F Balance Check .....	5
	RF PLL Free-run Frequency Check .....	6
	Focus/Tracking Gain .....	6
<b>4.</b>	<b>DIAGRAMS</b>	
	IC101(CXA1372Q)PIN DESCRIPTIONS .....	7
4-1.	Block Diagram .....	8
4-2.	Printed Wiring Boards .....	12
4-3.	Schematic Diagram .....	15
<b>5.</b>	<b>EXPLODED VIEWS</b> .....	21
<b>6.</b>	<b>ELECTRICAL PARTS LIST</b> .....	24

#### ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE  $\triangle$  SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.

**NOTES ON HANDLING THE OPTICAL PICK-UP BLOCK OR BASE UNIT**

The laser diode in the optical pick-up block may suffer electrostatic breakdown because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body.


During repair, pay attention to electrostatic breakdown and also use the procedure in the printed matter which is included in the repair parts.

The flexible board is easily damaged and should be handled with care.

**NOTES ON LASER DIODE EMISSION CHECK**

The laser beam on this model is concentrated so as to be focused on the disc reflective surface by the objective lens in the optical pick-up block. Therefore, when checking the laser diode emission, observe from more than 30cm away from the objective lens.

For UK Model and AEP Model

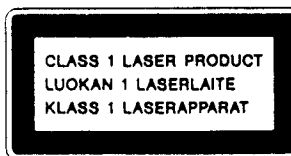


This Compact Disc player is classified as a CLASS 1 LASER product. The CLASS 1 LASER PRODUCT label is located on the rear exterior.

**Adjusting Operating Voltage**

For the customers of the model equipped with the voltage selector

Check that the voltage selector is set to the local power line voltage. If not, set the selector to the correct position before connecting AC power cord to a wall outlet.

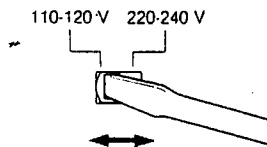


This section is extracted from instruction manual.

**SECTION 1  
GENERAL**


**Location of Controls**

**Front Panel**

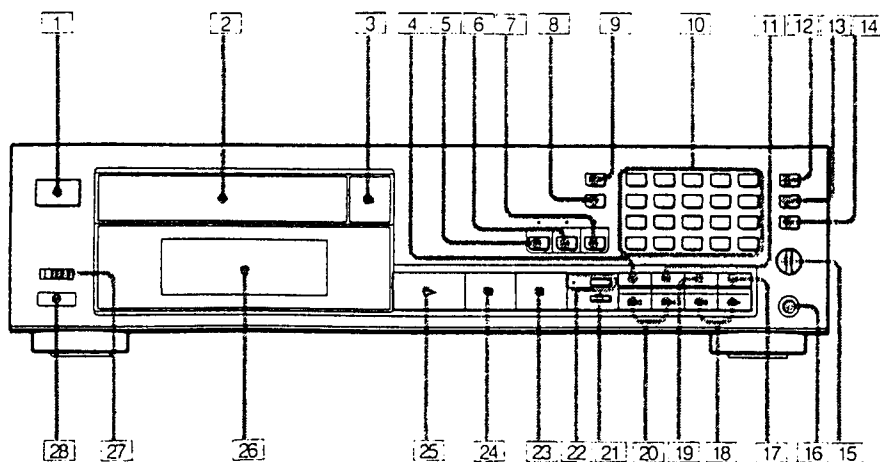

- 1 POWER switch 16
- 2 Disc tray 15
- 3 ▲ OPEN/CLOSE button 19
- 4 PEAK SEARCH button 68
- 5 CONTINUE button and indicator 30, 40, 44, 52, 58
- 6 SHUFFLE button and indicator 30
- 7 PROGRAM button and indicator 40, 44
- 8 TIME SET button 55, 60
- 9 EDIT/TIME FADE button 54, 60
- 10 Numeric buttons 22
- 11 REPEAT button 45
- 12 >20 (over 20) button 22
- 13 CHECK (program check) button 42, 50
- 14 CLEAR (program clear) button 43, 49, 50
- 15 LINE OUT/PHONE LEVEL control 20
- 16 PHONES jack
- 17 MUSIC SCAN button 62
- 18 ◀▶▶▶ (manual search) buttons 20, 60
- 19 FADER button 60 62
- 20 ◀▶▶▶ (AMS\*) buttons 22, 45
- 21 TIME button 22
- 22 A. SPACE (auto space)/A. CUE(auto cue) button and auto cue indicator 28, 62
- 23 ■ (stop) button 20
- 24 || (pause) button 20
- 25 ▶ (play) button 20
- 26 Display window
- 27 TIMER switch 65
- 28 Remote sensor 16

**Remote commander**

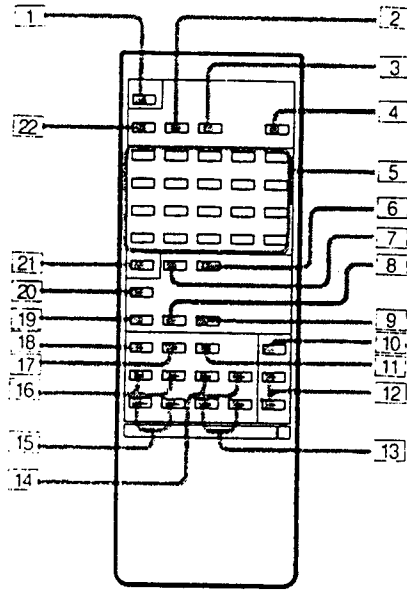


- 1 ▲ OPEN/CLOSE button 1B
- 2 SHUFFLE button 30
- 3 PROGRAM button 40, 44
- 4 M.SCAN (music scan) button 42
- 5 Numeric buttons 22
- 6 CLEAR (program clear) button 28, 42, 50
- 7 CHECK button 42, 50
- 8 A ↔ B repeat button 38
- 9 A.SPACE (auto space)/A.CUE (auto cue) button 28, 32
- 10 FADER button 60, 62
- 11 ■ (stop) button 20
- 12 LINE OUT LEVEL + / - (line out/headphone volume) buttons 20
- 13 ◀▶ SLOW (low speed manual search) buttons 24
- 14 ◀▶▶▶ (manual search) buttons 24, 60
- 15 ◀ ▶ INDEX buttons 24
- 16 ◀▶▶▶ AMS buttons 22, 45
- 17 || (pause) button 20
- 18 ▶ (play) button 20
- 19 CLEAR/REPEAT (A ↔ B repeat clear/repeat) button 38
- 20 TIME button 22
- 21 20 (over 20) button 22
- 22 CONTINUE button 30, 40, 44, 52, 58

**SECTION 2  
DISASSEMBLY**

**BASE UNIT REMOVAL**

Note: Follow the disassembly procedure in the numerical order given.

1. Remove CD mechanism from the set and turn over.
2. Turn the cam 1 in the Arrow A direction by the ⊖ driver.
3. Take out disc table 2.
4. Remove bracket yoke 3.
5. Remove BU-5BD1 4 in the Arrow 4 direction.

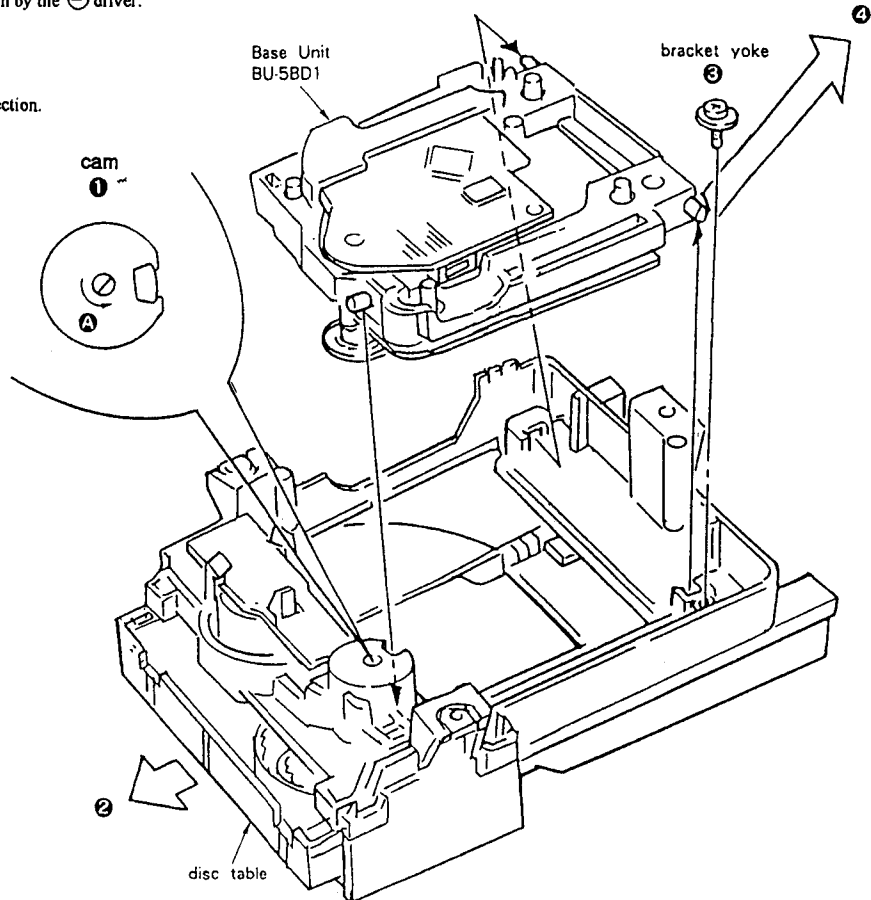


## SECTION 3 ELECTRICAL BLOCK CHECKING

**Note :**


1. CD Block basically constructed to operate without adjustment. Therefore, check each item in order given.
2. Use YEDS-18 disc (3-702-101-01) unless otherwise indicated.
3. Use the oscilloscope with more than  $10M\Omega$  impedance.
4. Clean an object lens by an applicator with neutral detergent when the signal level is low than specified value with the following checks.

### S Curve Check

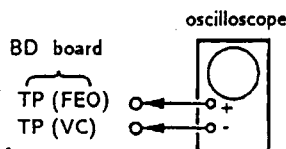

**Procedure :**


1. Connect oscilloscope to test point TP (FEO) on BD board.
2. Connect between test point TP (FES) and TP (VC) by lead wire.
3. Turned Power switch on and actuate the focus serch. (actuate the focus serch when disc table is moving in and out.)
4. Check the oscilloscope waveform (S curve) is symmetrical between A and B. And confirm peak to peak level within  $3 \pm 1V_{p-p}$ .

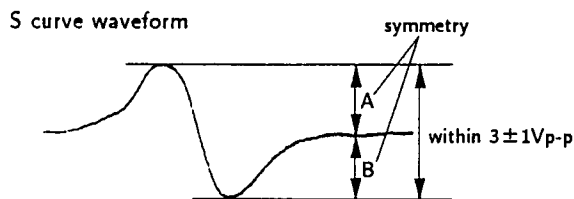

5. After check, remove the lead wire connected in step 2.

- Note :**
- Try to mesure several times to make sure that the ratio of A : B or B : A is more than 10 : 7.
  - Take sweep time as long as possible and light up the brightness to obtain best waveform.

### RF Level Check

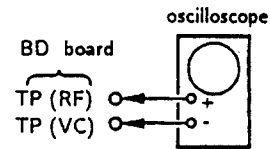


**Procedure :**


1. Connect oscilloscope to test point TP (RF) on BD board.
2. Turn Power switch on.
3. Put disc (YEDS-18) in and playback.
4. Confirm that oscilloscope waveform is clear and check RF signal level is correct or not.

**Note :**

Clear RF signal waveform means that the shape "◇" can be clearly distinguished at the center of the waveform.

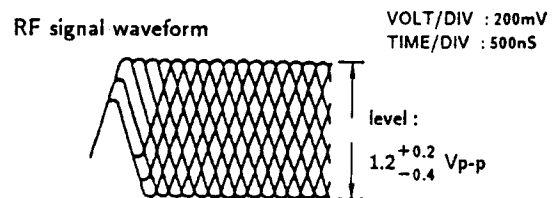


### E-F Balance Check

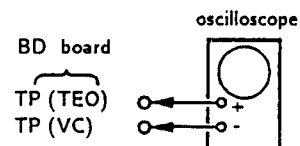

**Procedure :**

1. Connect test point TP (ADJ) to ground and TP (TES) to TP (VC) with lead wire.
2. Connect oscilloscope to test point TP (TEO) on BD board.
3. Turn Power switch on.
4. Put disc (YEDS-18) in and playback.
5. Confirm that the osilloscope waveform is symmetrical on the top and bottom in relation to 0V, and check this level.

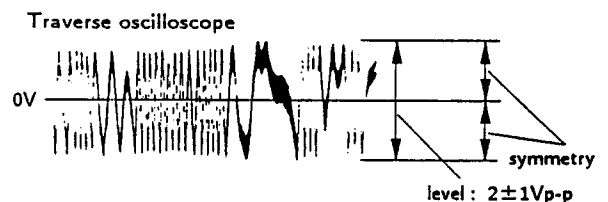


6. Remove the lead wire connected in step 1.

### RF PLL Free-run Frequency Check

**Procedure :**

1. Connect frequency counter to test point (PCK) with lead wire.

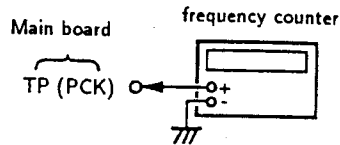

2. Turn Power switch on.
3. Confirm that reading on frequency counter is
4. 3218MHz.


### Focus/Tracking Gain

This gain has a margin, so even if it is slightly off. There is no problem.

Therefore, do not perform, this adjustment.


Please note that it should be fixed to mechanical center position when you moved and do not know original position.

**Adjustment Locations :  
[BD board]**

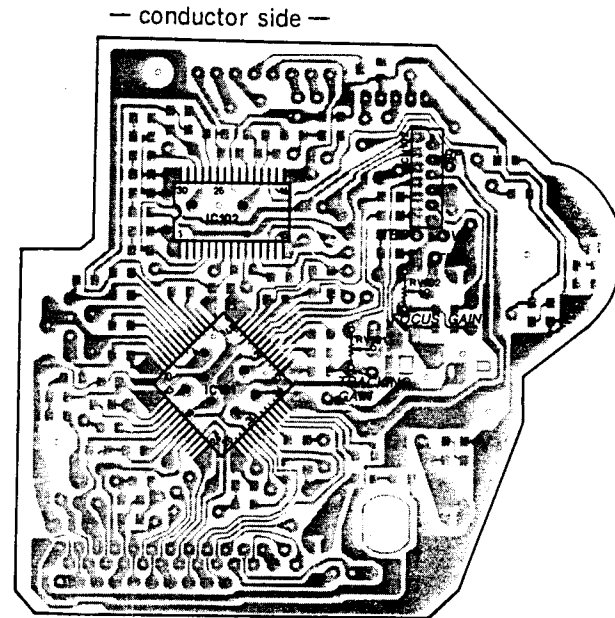

**[Main board]**

**- Component Side -**

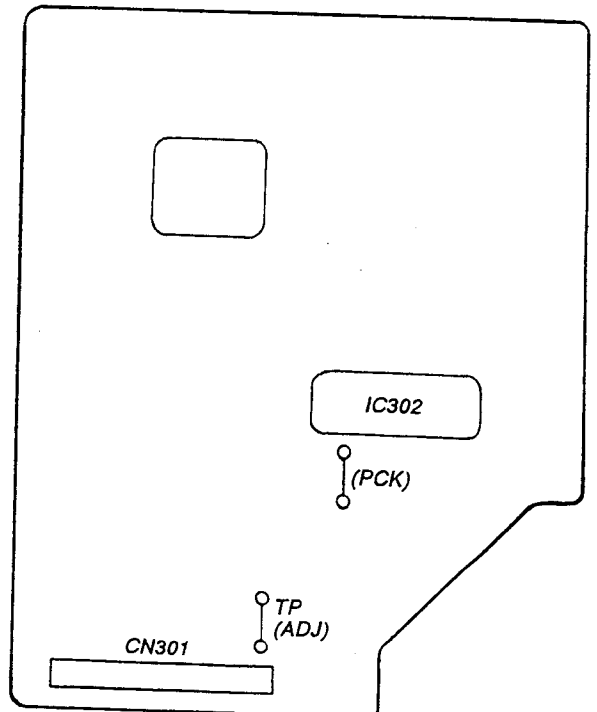


## SECTION 4 DIAGRAMS


### IC101 (CXA1372Q) PIN DESCRIPTIONS



PIN NO.	PIN NAME	I/O	FUNCTION
1	VC		2.5 Volts power supply.
2	FGD	I	Focus gain adjusting capacitor connected between ② pin and ③ pin.
3	FS3	I	Focus gain adjusting capacitor connected between ② pin and ③ pin.
4	FLB	I	Focus Servo low frequency boost-up capacitor connected.
5	FEO	O	Focus drive output.
6	FE-	I	Focus error amp inverted input.
7	SRCH	I	Connected capacitor to making the focus serch waveform.
8	TGU	I	Tracking gain adjusting capacitor connected between ⑧ pin and ⑨ pin.
9	TG2	I	Tracking gain adjusting capacitor connected between ⑧ pin and ⑨ pin.
10	AV CC		+5 Volts power supply.
11	TAO	O	Tracking drive output.
12	TA-	I	Tracking amp inverted input.
13	SL+	I	Sled amp non-inverted input.
14	SLO	O	Sled drive output.
15	SL-	I	Sled amp non-inverted input.
16	FSET	I	Phase stabilizer setting resistor connected.
17	ISET	I	Current setting resistor connected.
18	SSTOP	I	Limit switch connection port.
19	AV EE		Ground (0V).
20	DIRC	I	Direct control port. Non-connected.
21	LOCK	I	Sled free-run protection is operate at "L".
22	CLK	I	Serial data transmission clock input form digital signal processor.
23	XLT	I	Latch input from digital signal processor.
24	DATA	I	Serial input from digital signal processor.
25	SENS	O	Outputs internal state corresponding to address.
26	XRST	I	System reset input. Reset at "L".
27	C. OUT	O	Tracking counter output.
28	D GND		Digital ground. Grounded
29	MIRR	O	Mirror output digital signal processor.
30	DFCT	O	Deffect output. Deffect at "H".
31	ASY	I	Auto symmetry control input.
32	EFM	O	EFM Comparator output.
33	FOK	O	Focus OK.
34	CC2	I	Deffect bottom hold input.
35	CC1	O	Deffect bottom hold output.
36	DV CC		+5 Volts power supply.
37	CB	I	Deffect bottom hold capacitor connected.
38	CP	I	Mirror hold capacitor connected.
39	RFI	I	RF Signal input (Capacitance coupled).
40	RFO	I	RF Signal input (Direct Coupled).
41	DV EE		Grounded (0V).
42	TZC	I	Tracking Zero-cross comparator input.
43	TE	I	Tracking error amp input.
44	TDFCT	I	Deffect correction hold capacitor connected.
45	ATSC	I	Anti-shock input.
46	FZC	I	Focus Zero-cross comparator input.
47	FE	I	Focus error input.
48	FDCT	I	Deffect correction hold capacitor connected.

4-1. BLOCK DIAGRAM

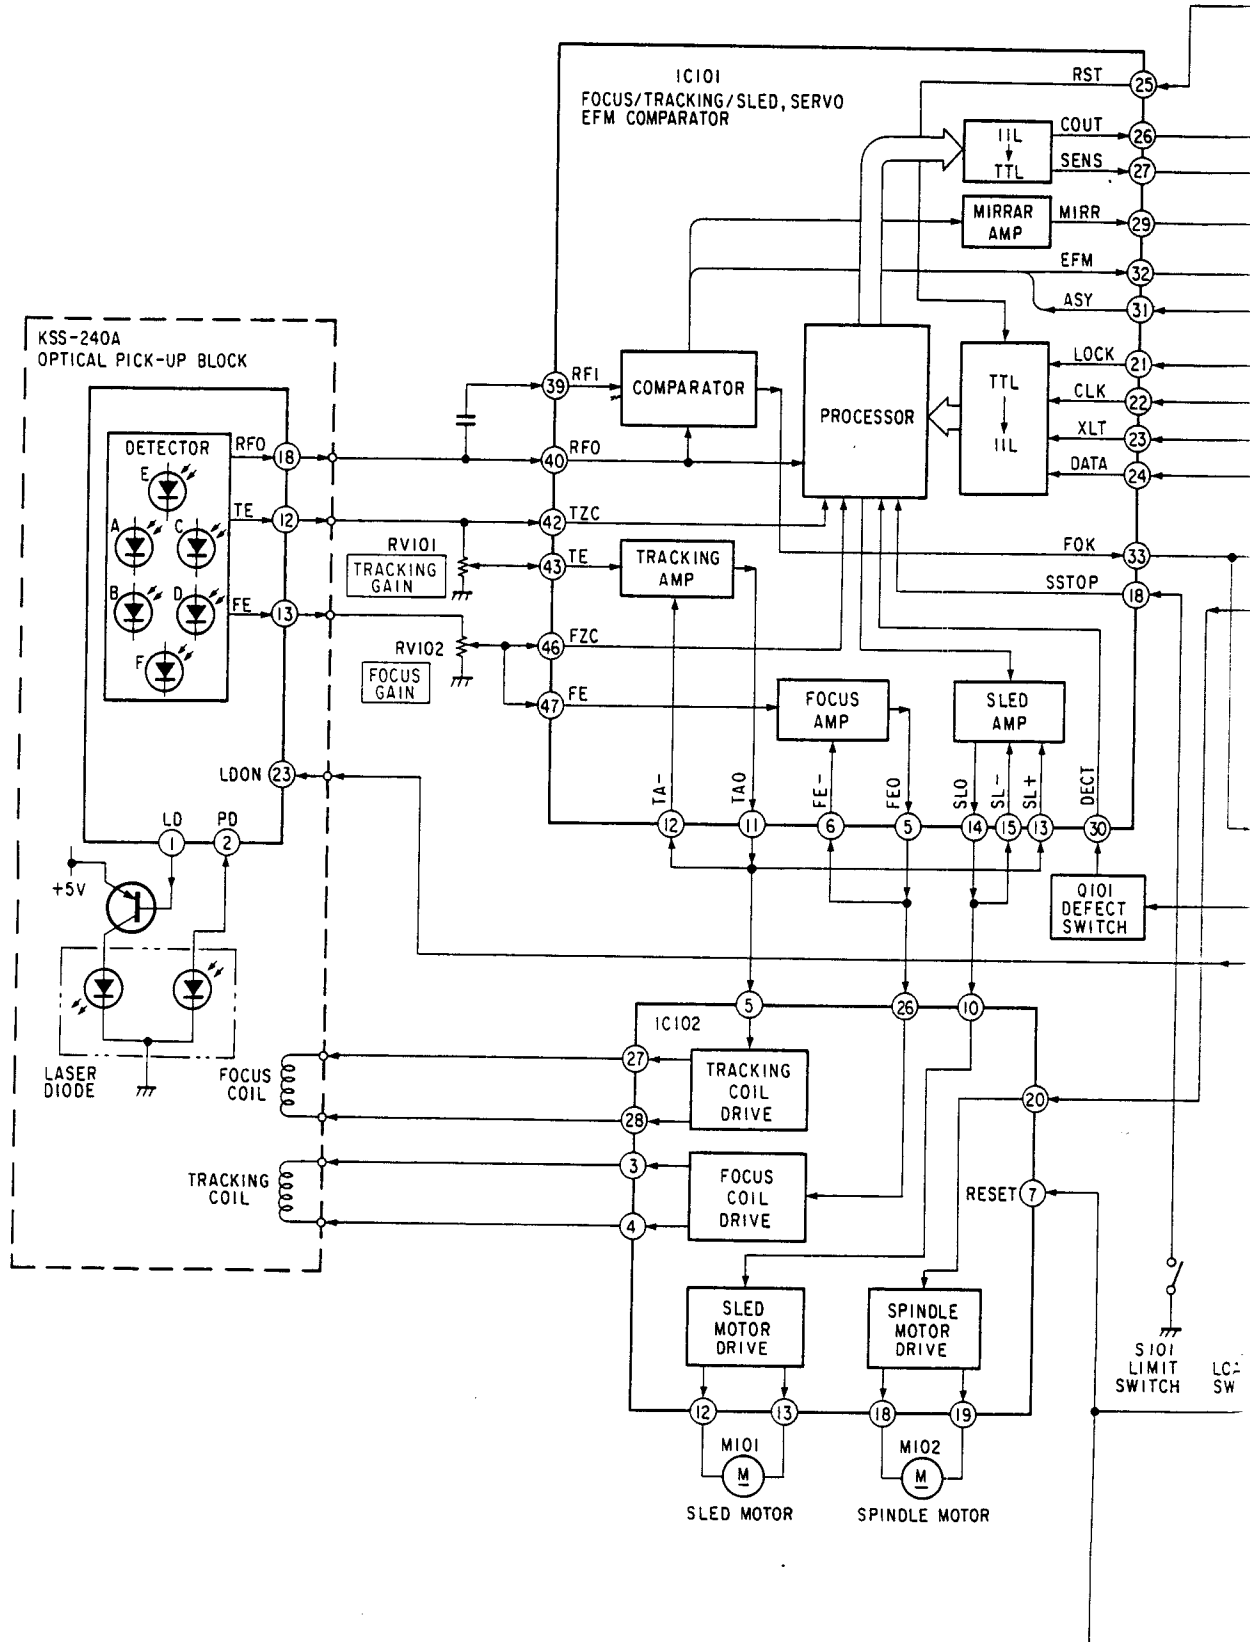




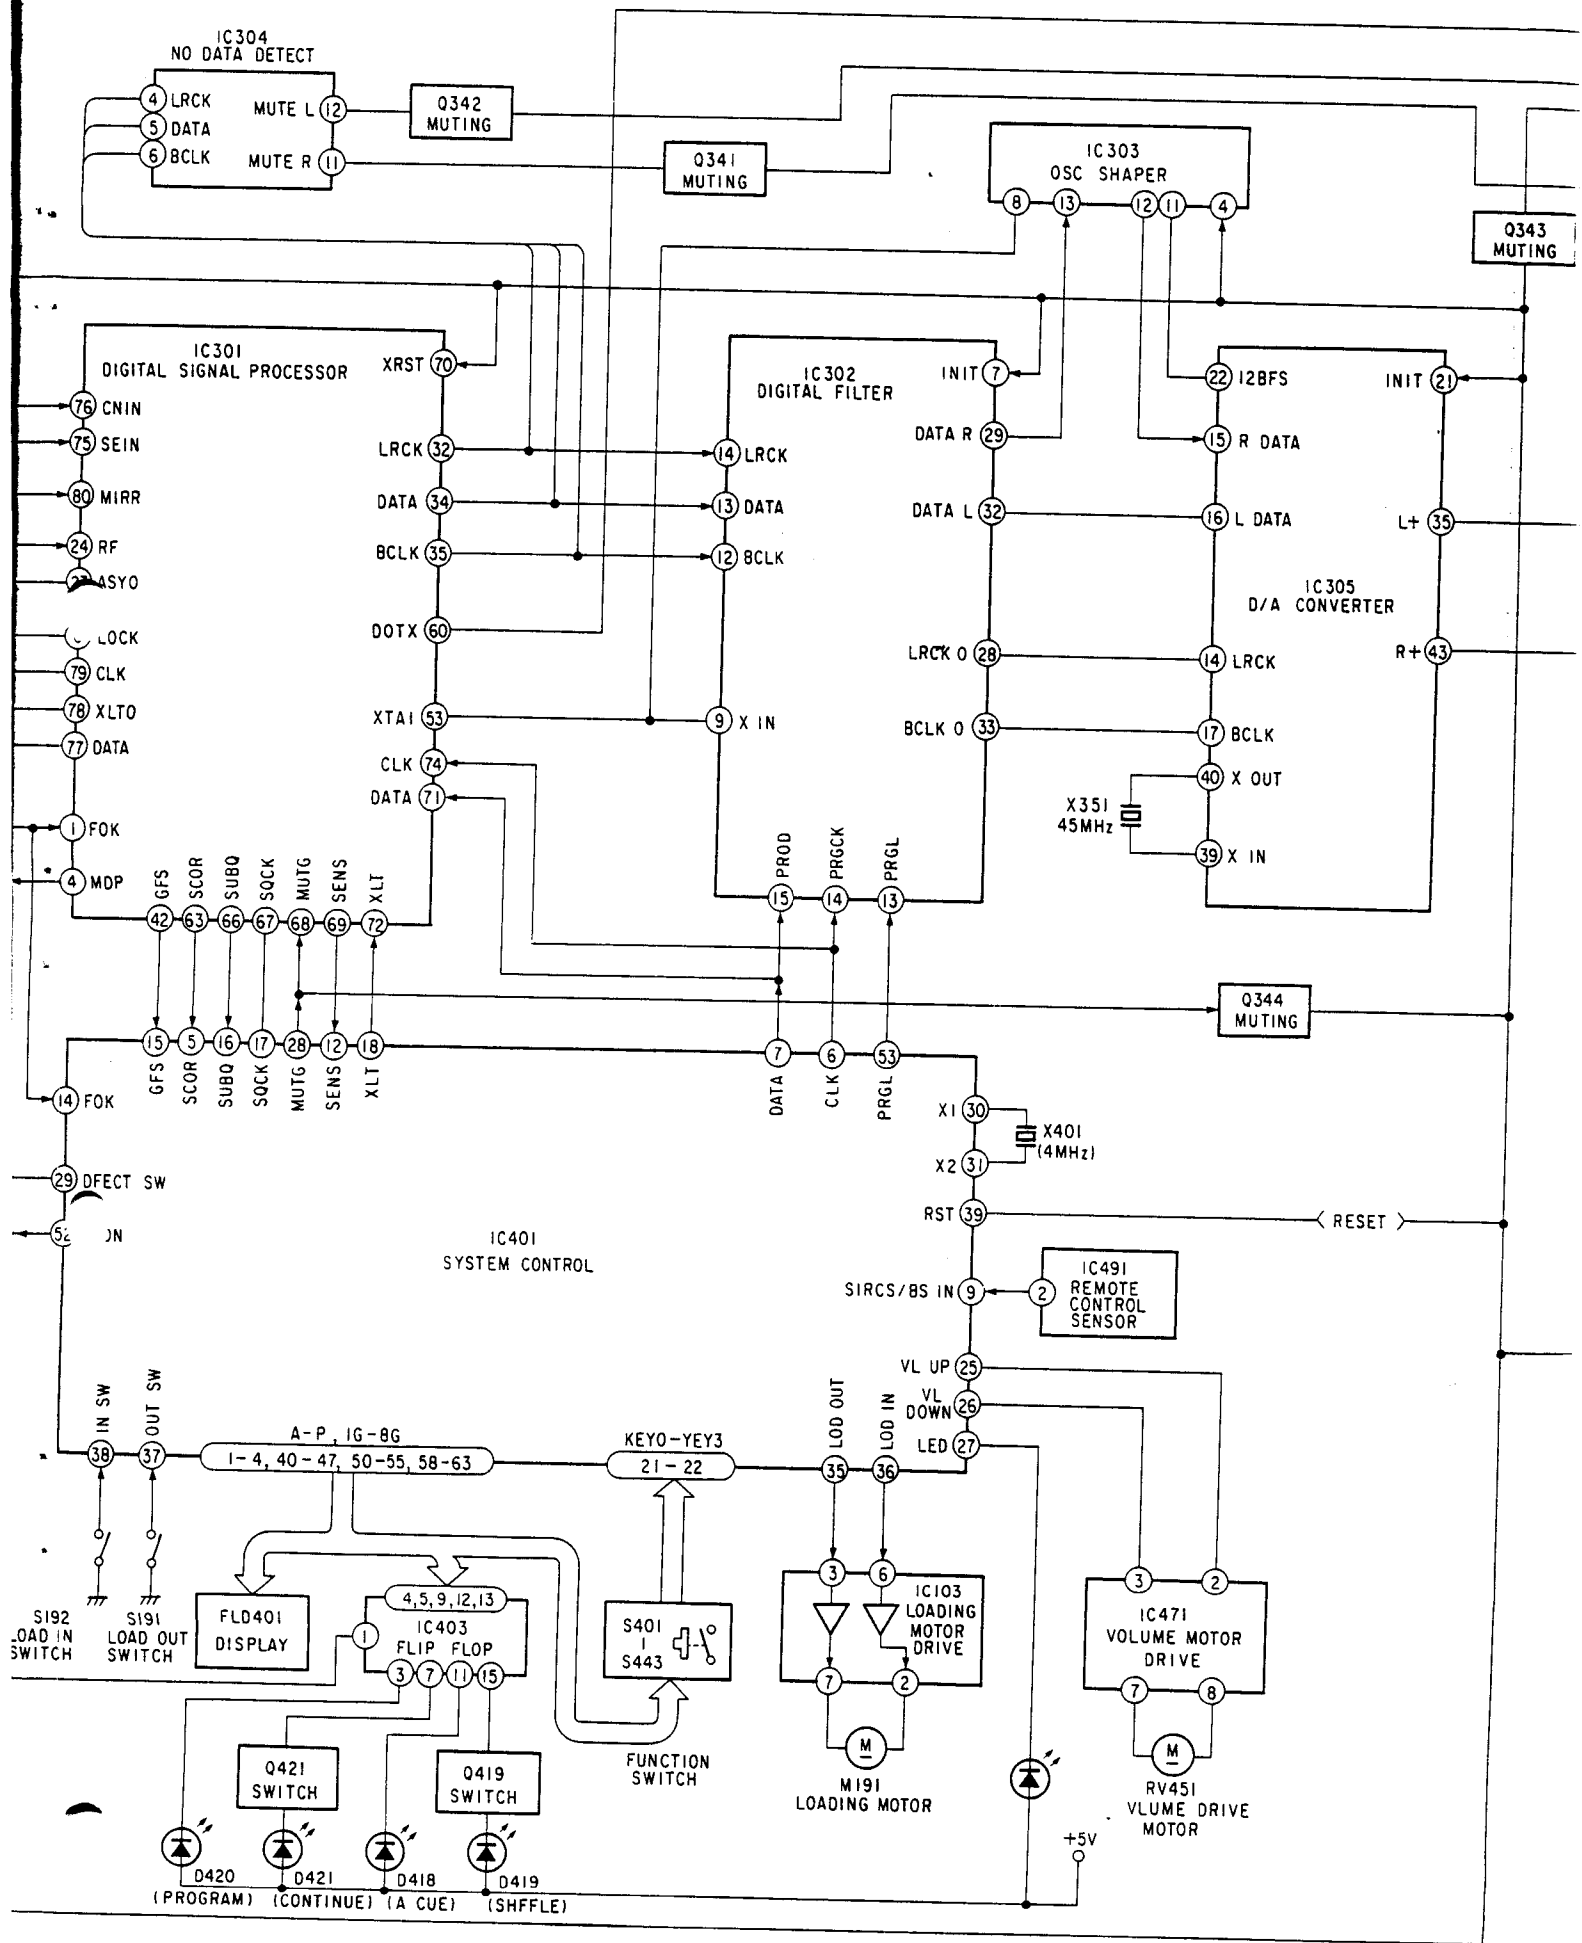

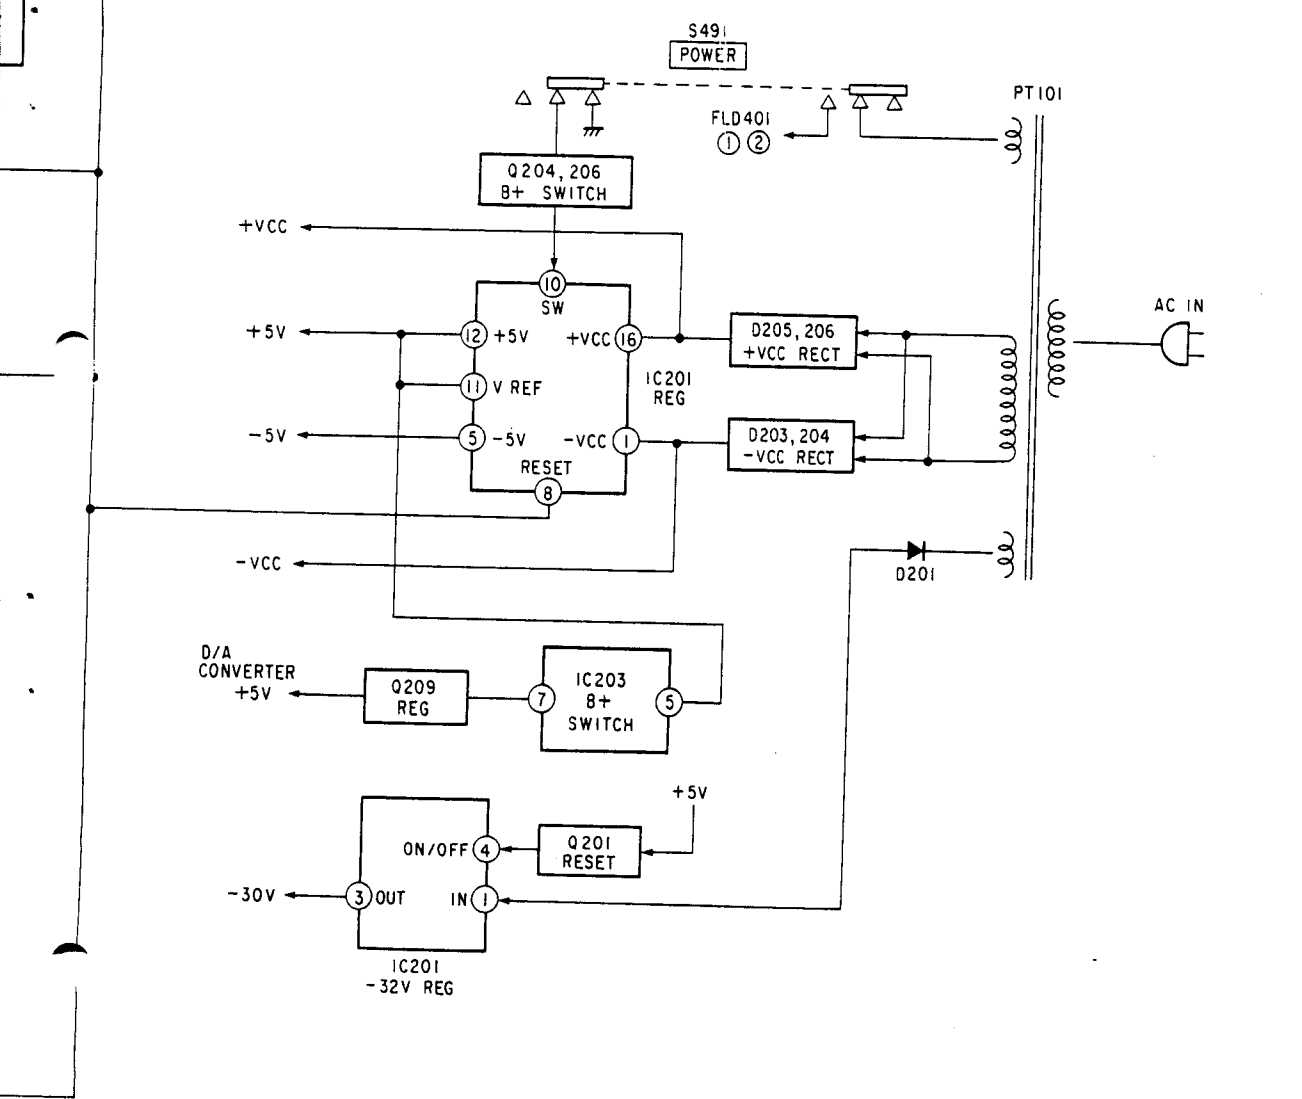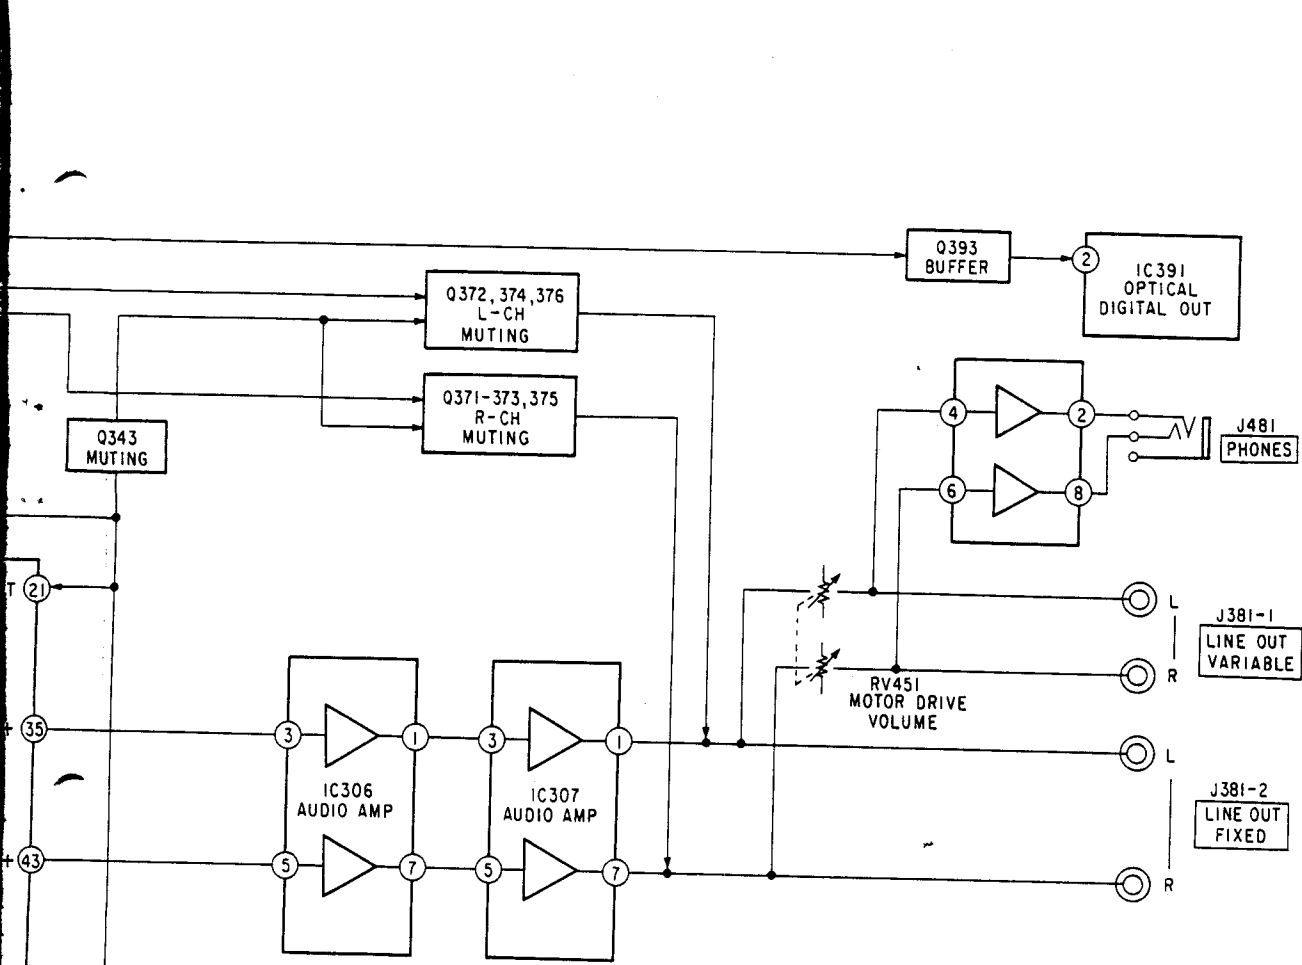

## 4-2. PRINTED WIRING BOARDS

### • Circuit Boards Location

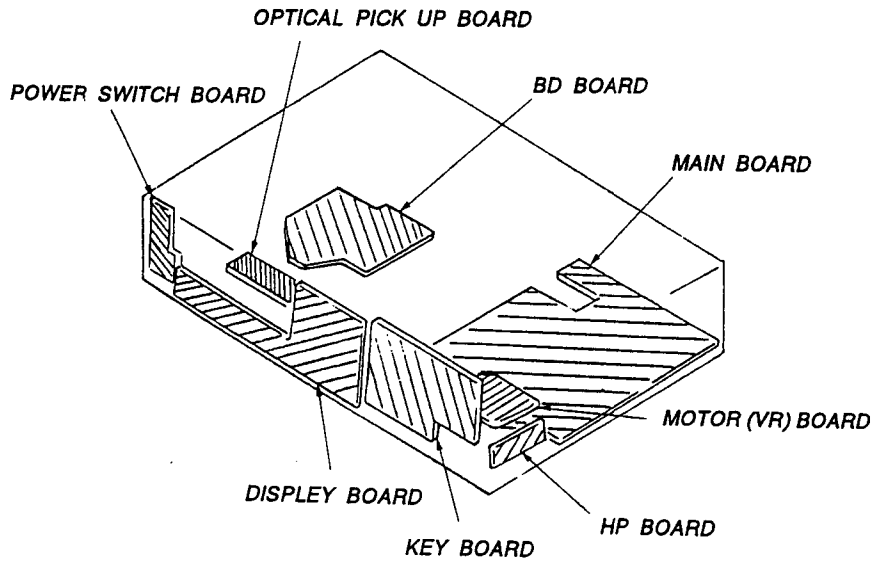


### • Semiconductor Location


Ref. No.	Location	Ref. No.	Location
D101	B-22	IC202	G-17
D201	E-19	IC203	G-16
D202	I-19	IC301	H-16
D203	E-18	IC302	G-15
D204	E-18	IC303	G-14
D205	E-17	IC304	H-13
D206	E-17	IC305	E-15
D207	G-19	IC306	D-15
D208	F-17	IC307	C-15
D209	F-16	IC391	B-14
D341	F-15	IC401	C-9
D351	G-13	IC403	B-4
D401	E-2	IC451	H-6
D402	E-2	IC471	I-7
D403	E-3	IC491	H-2
D404	E-3		
D405	E-3	Q101	D-22
D406	B-9	Q201	F-19
D407	B-9	Q202	G-18
D408	B-9	Q203	F-18
D409	B-9	Q204	H-18
D410	B-9	Q205	H-18
D411	B-9	Q206	H-17
D412	B-4	Q207	G-18
D413	B-5	Q208	G-18
D414	B-5	Q209	F-16
D415	B-6	Q341	D-13
D416	B-6	Q342	D-14
D417	D-8	Q343	D-13
D418	D-3	Q344	G-13
D419	F-2	Q371	B-14
D420	F-3	Q372	C-16
D421	F-2	Q373	B-14
D471	J-7	Q374	C-16
		Q375	C-14
IC101	D-21	Q376	B-16
IC102	C-21	Q393	B-14
IC103	B-22	Q419	A-5
IC201	F-19	Q421	B-2

#### Note:


- ○ : parts extracted from the component side.
- ■ : parts mounted on the conductor side.

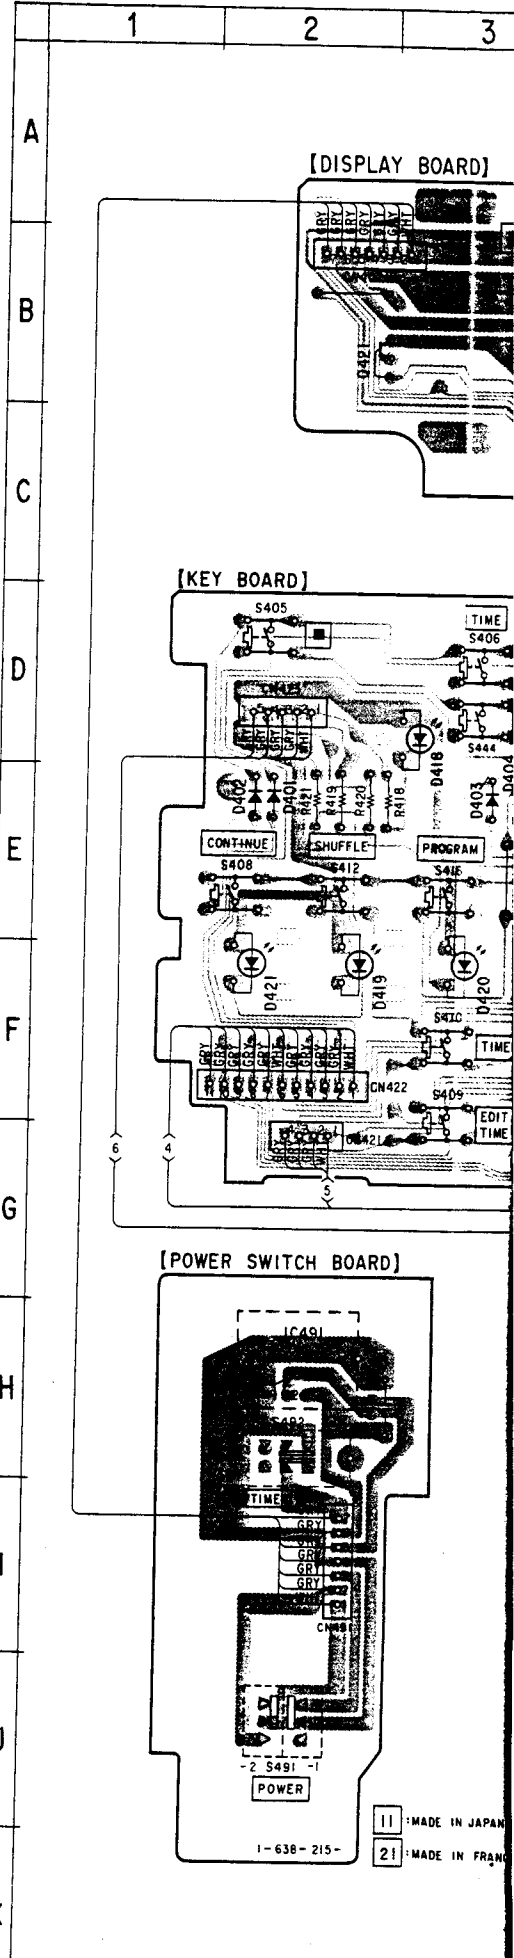

BOARD

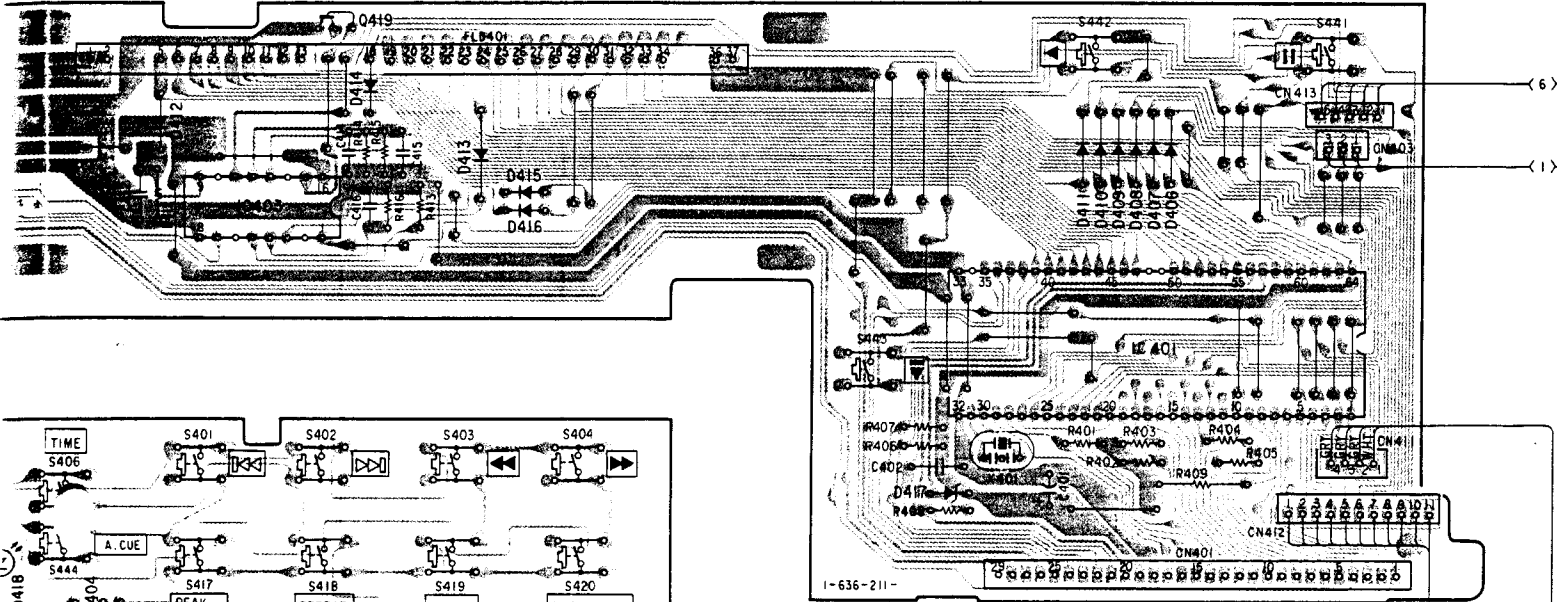


11 : MADE IN JAPAN  
 21 : MADE IN FRANCE

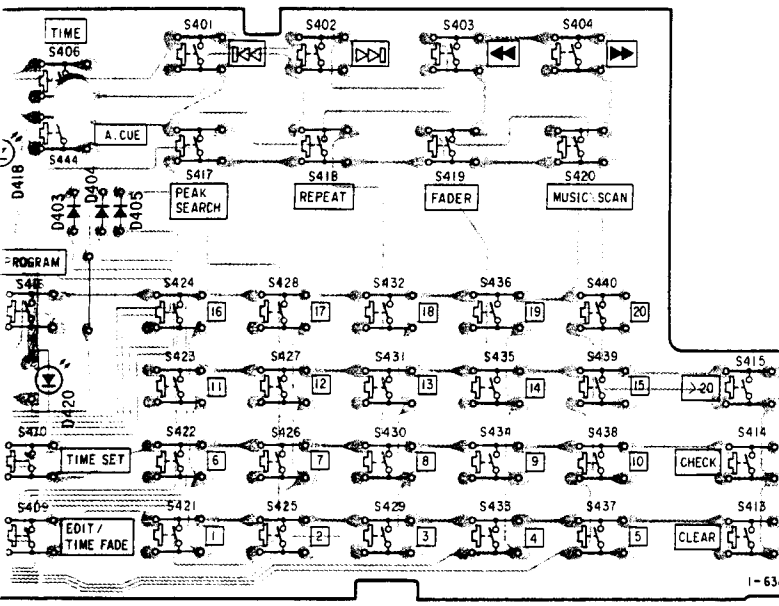

11 : MADE IN JAPAN  
 21 : MADE IN FRANCE


[ MOTOR (VR) BOARD ]

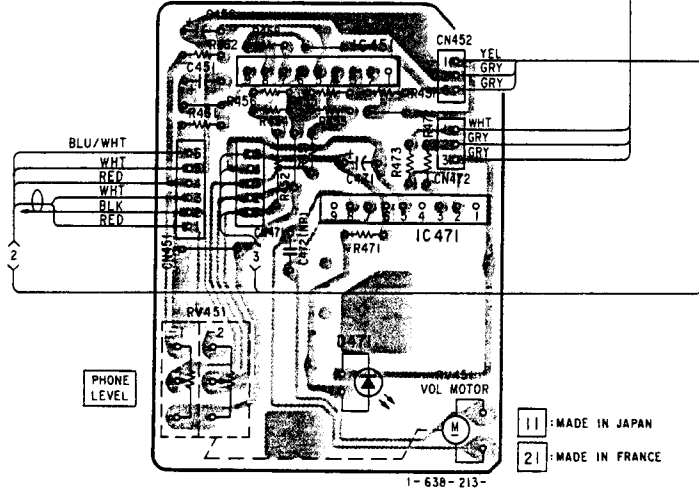

MADE IN JAPAN  
 MADE IN FRANCE

11 : MADE IN JAPAN  
 21 : MADE IN FRANCE


[ HP BOARD ]

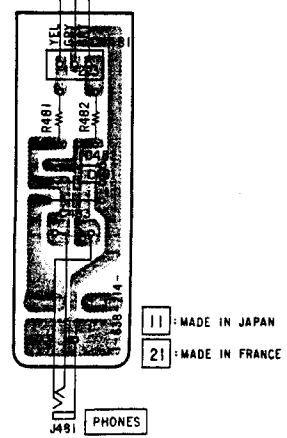

11 : MADE IN JAPAN  
 21 : MADE IN FRANCE

[MAIN BOARD]

FIXED L R L R VARIABLE

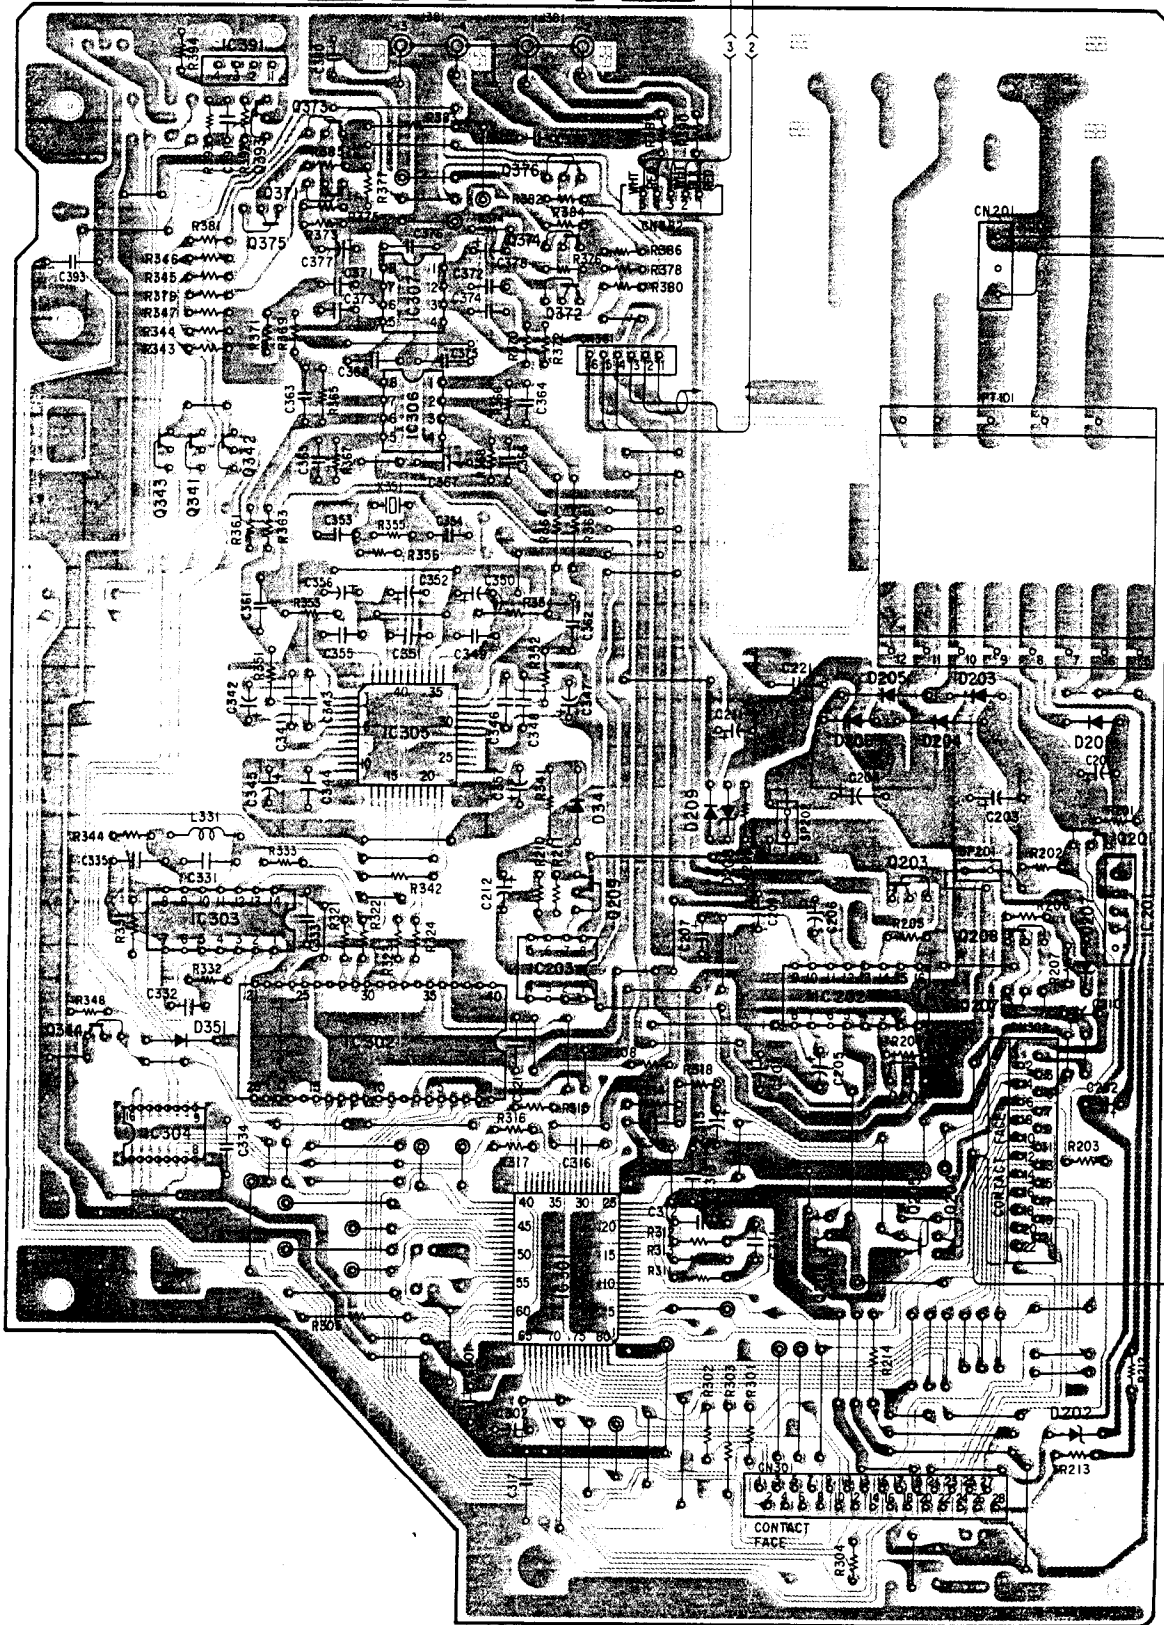

TO - MD BROCK

11 : MADE IN JAPAN  
 21 : MADE IN FRANCE






1 2 3 4


A

• WAVEFORM

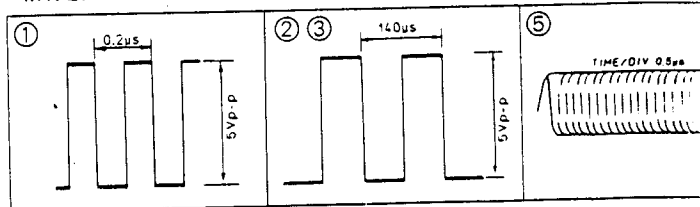

B

C

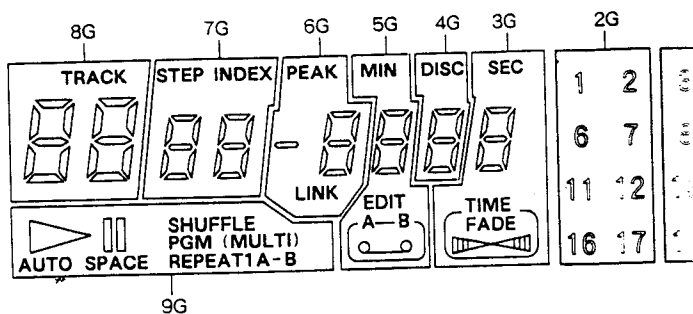


D

E


F

• Semiconductor Lead Layouts


CXD2500AQ




2SB1274SA-RS




CXD2552Q-3



2SD774-34



CXD2557  
SN74HC175AN



RD5.8ES-B2  
RD6.8ES-B1  
RD7.5J8-B2  
RD9.1ES-L  
1N4148M  
11EQ804  
11ES2

DTA144ES  
DTC114ES  
DTC144ES  
2SC2458-YGR

G


H

I

J

K

[DISPLAY BOARD]

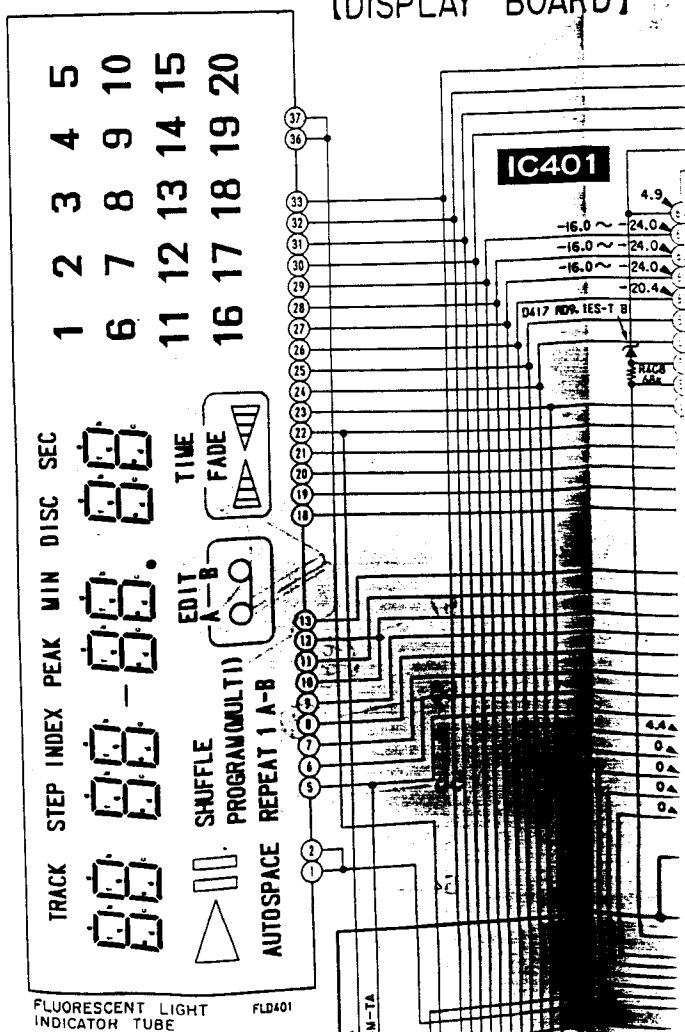




# [POWER SWITCH BOARD(2/2)]




BOARD 1

IC401


IC491

REMOTE CONTROL RECEIVER

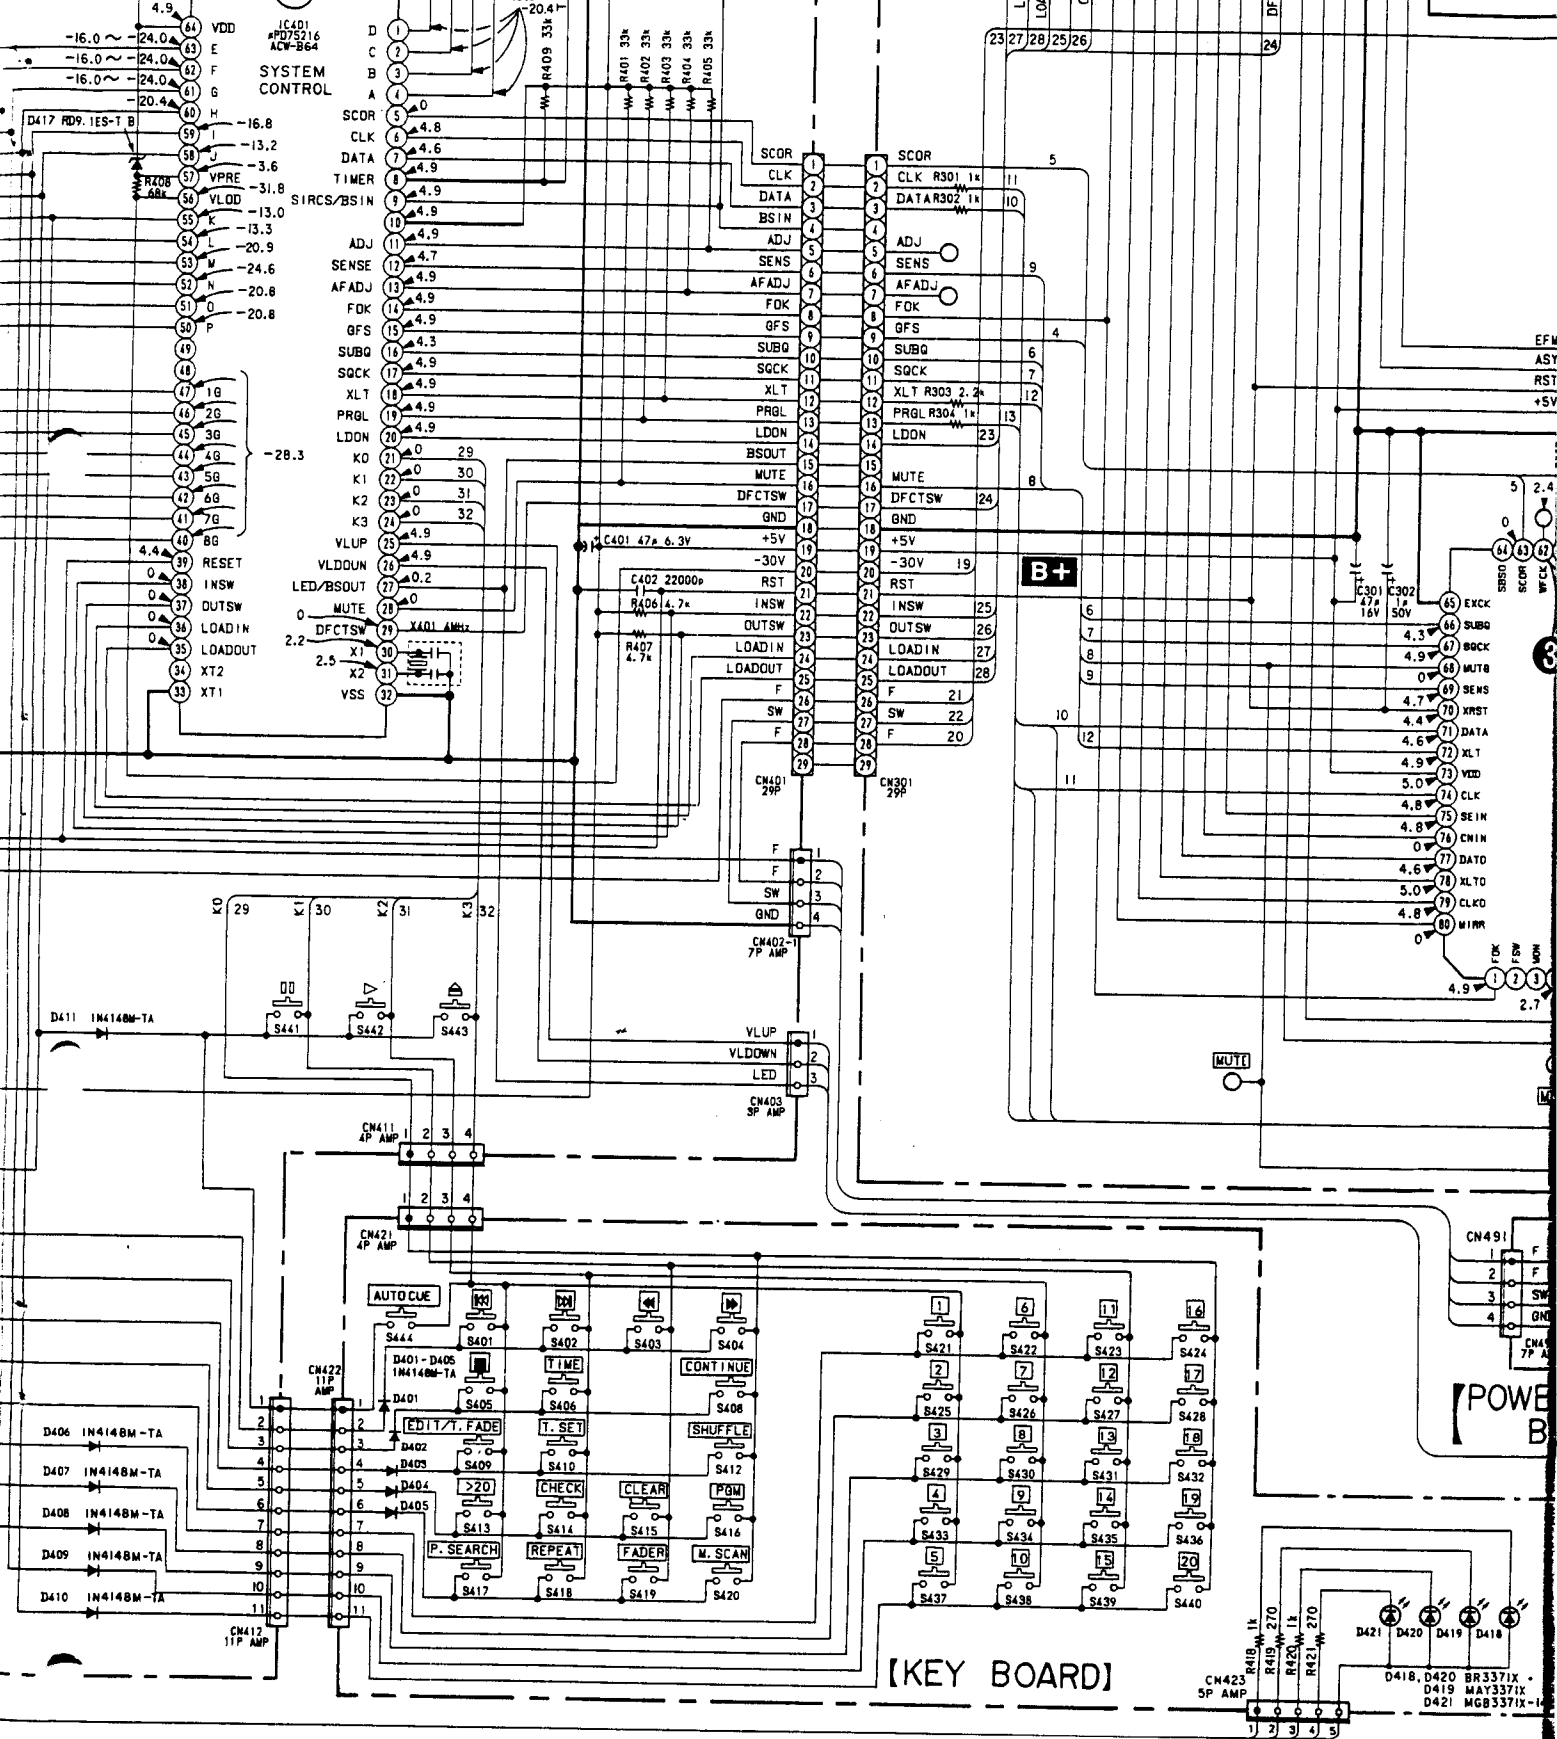

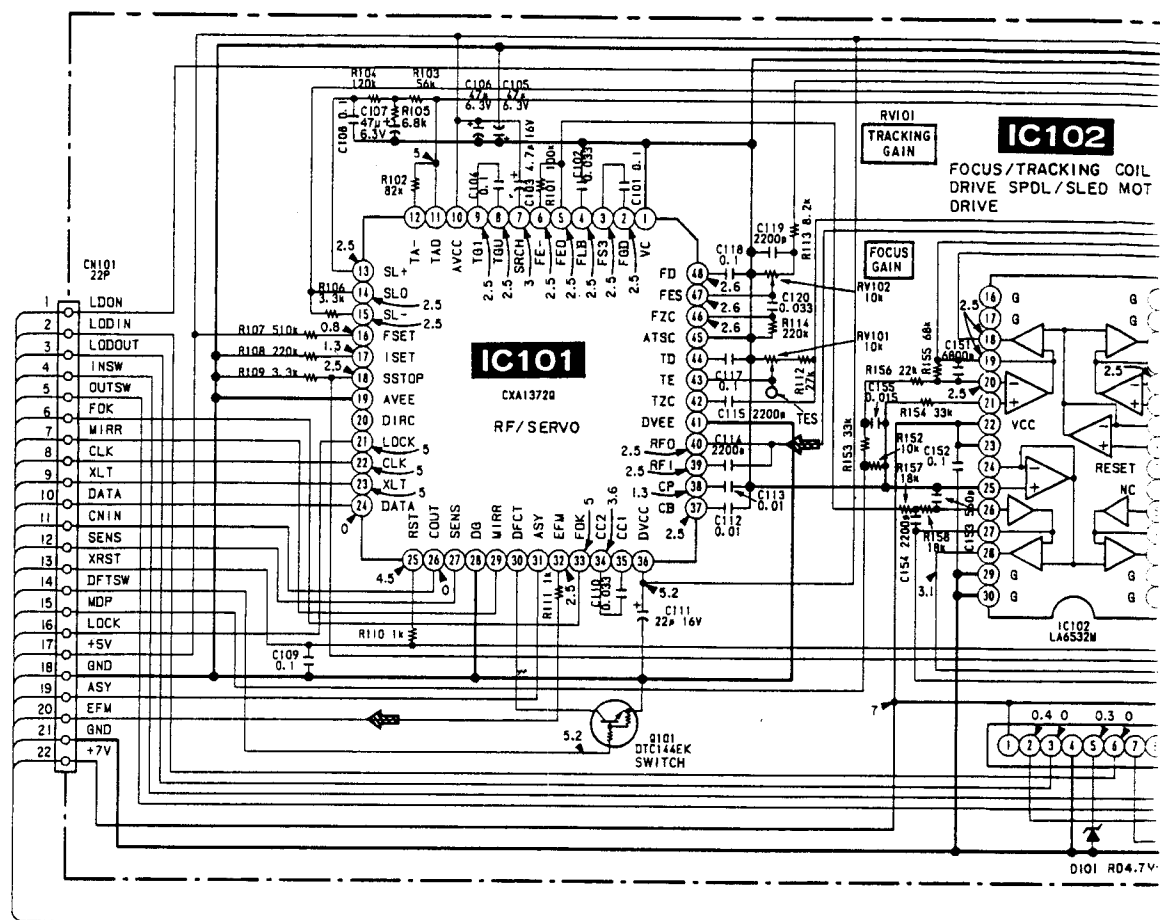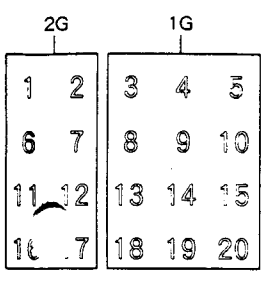


[POWER SWITCH BOARD(2/2)]

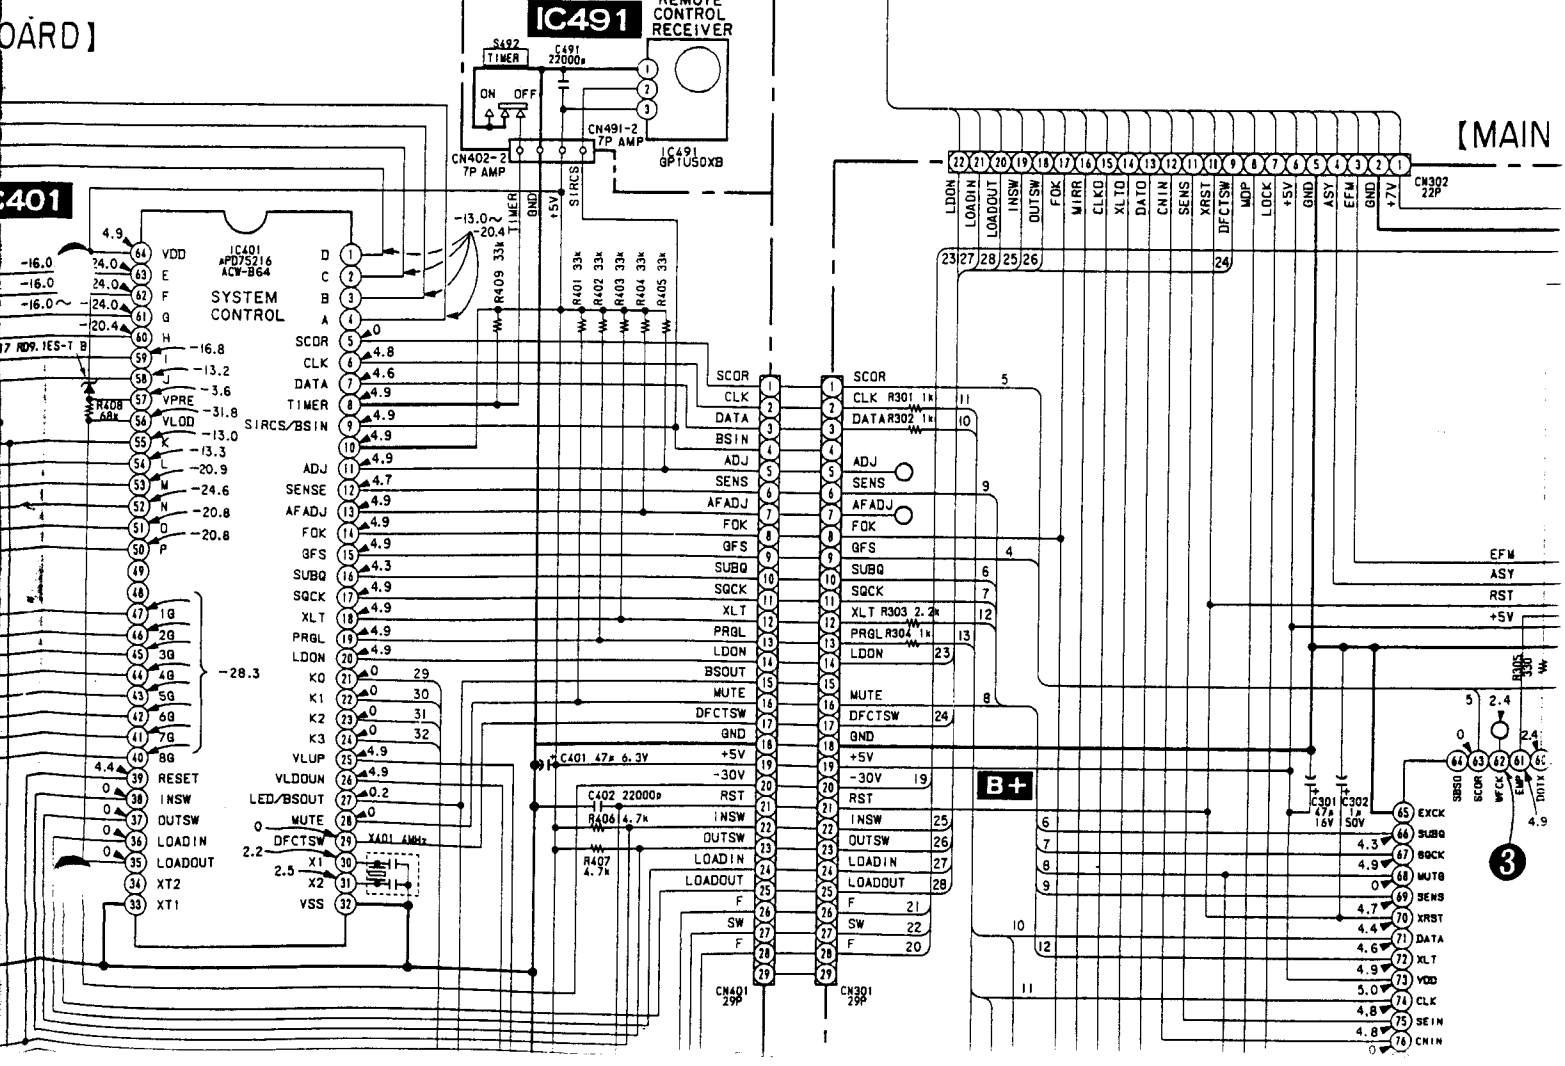






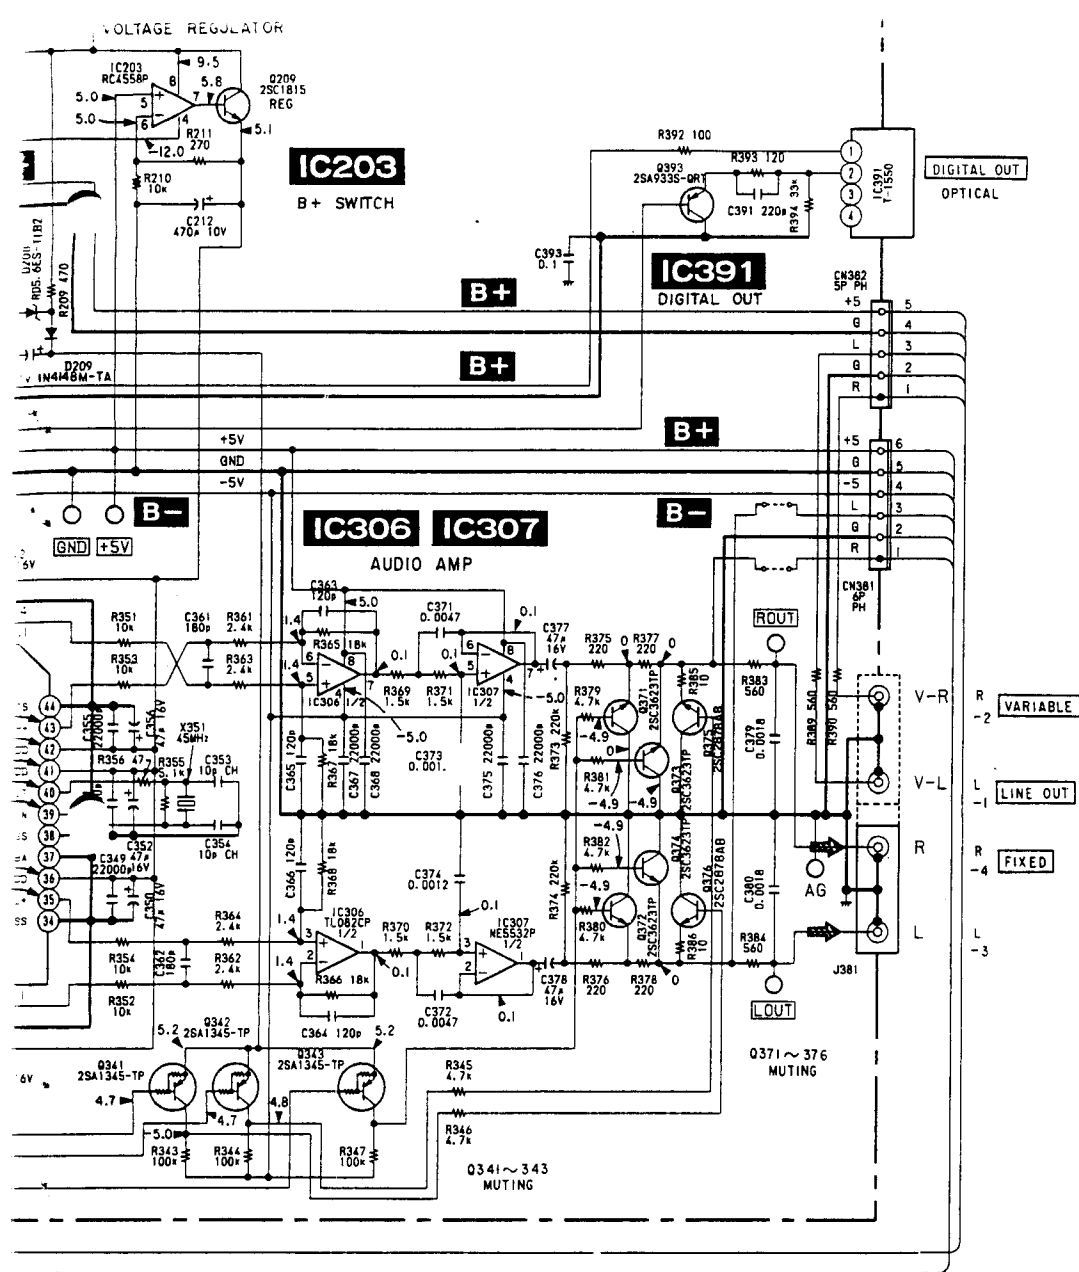

BOARD]

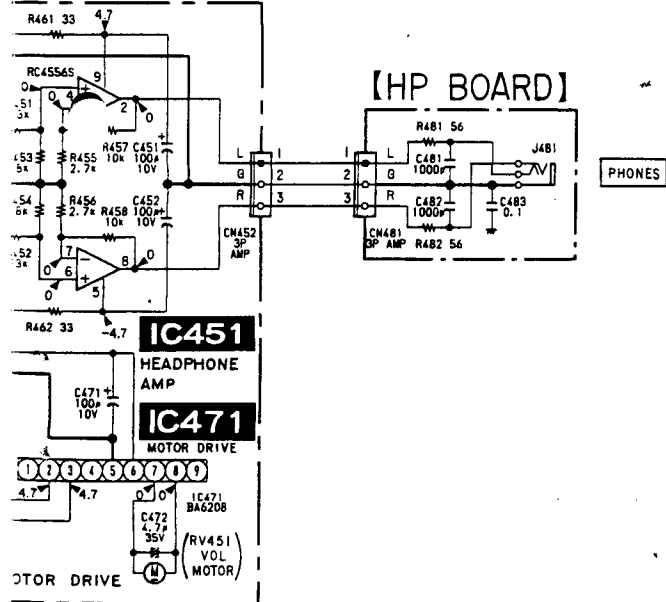

Note:

- All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\text{pF}$ :  $\mu\text{F}$  50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in  $\Omega$  and  $\frac{1}{4}$  W or less unless otherwise specified.

Note:


The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety. Replace only with part number specified.

Note:

Les composants identifiés par une marque  $\Delta$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- **B+** : B+ Line.
- **B-** : B- Line.
- $\square$  : adjustment for repair.
- Voltages and waveforms are dc with respect to ground under no-signal (detuned) conditions.
- Waveforms are taken with a oscilloscope. Voltage variations may be noted due to normal production tolerances.
- Circled numbers refer to waveforms.
- Signal path.
  - $\Rightarrow$  : CD
  - $\Rightarrow$  : digital out

F  
G  
H  
I  
J  
K  
L  
M  
N  
O  
P

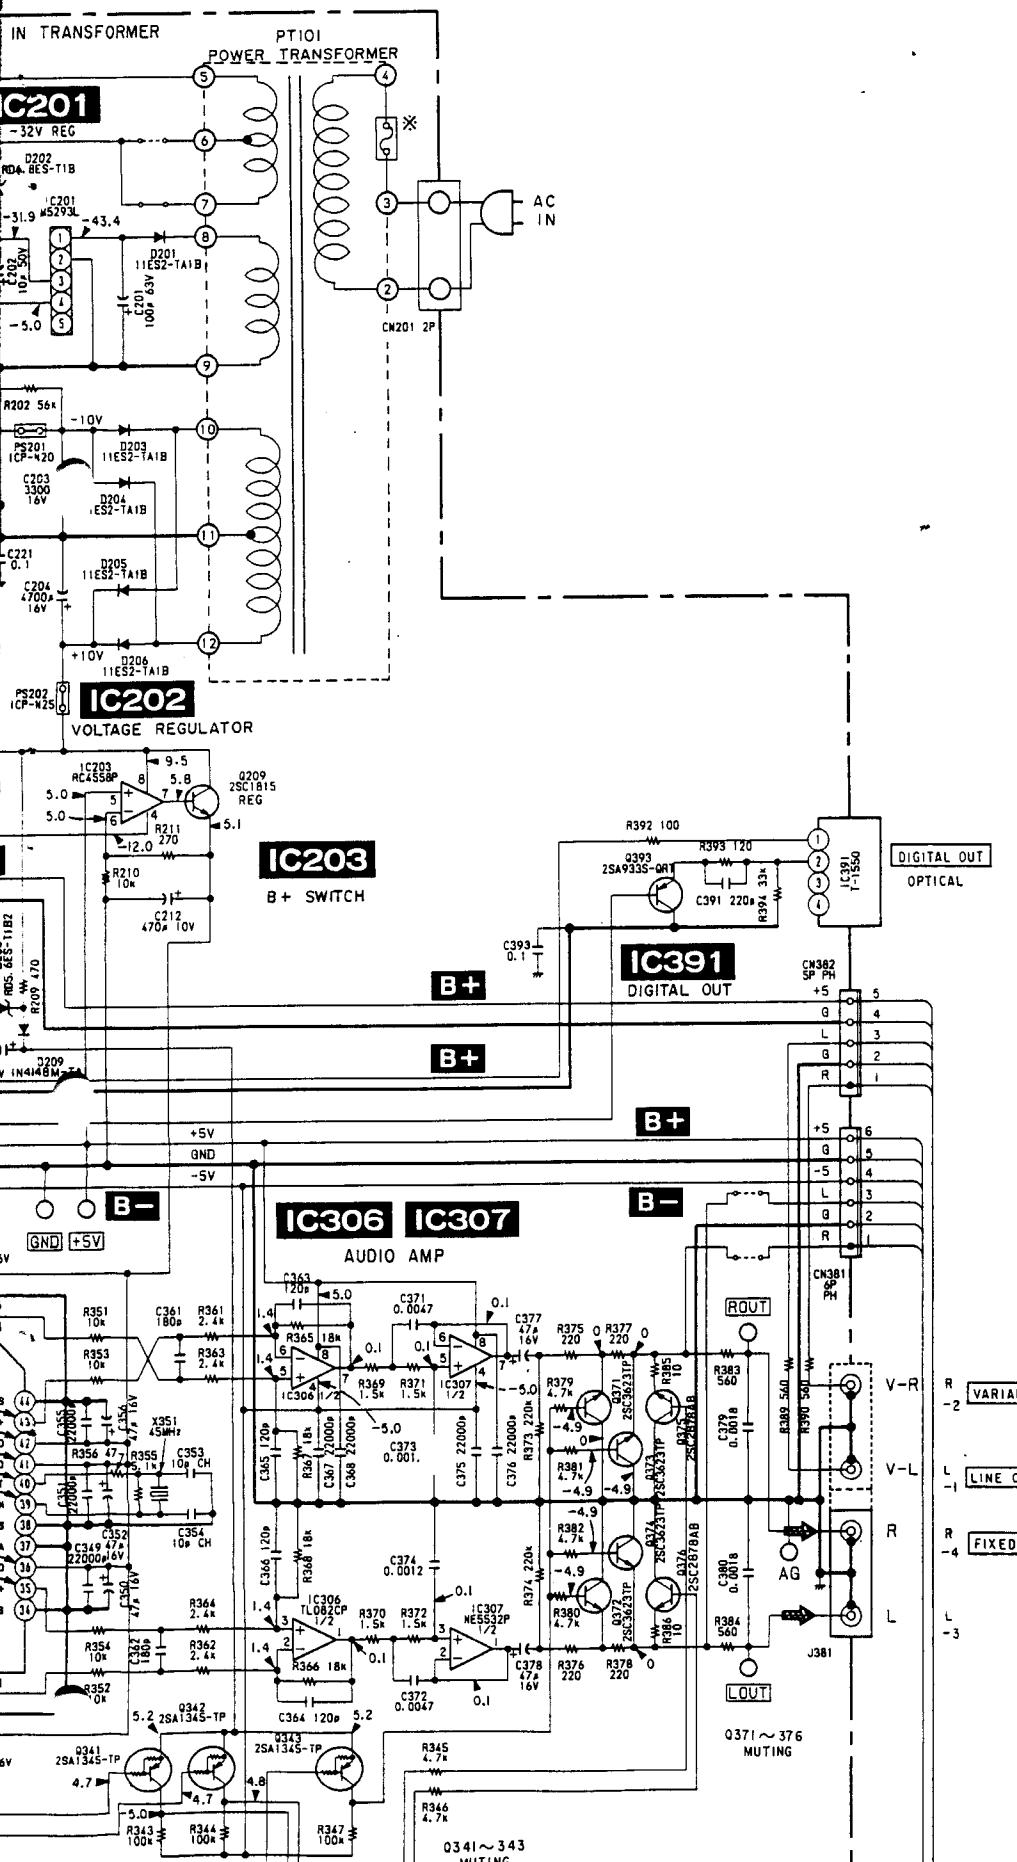

DIGITAL OUT OPTICAL

B+

B+

B-

VARIABLE

LINE OUT


FIXED

Q371 ~ 376 MUTING


Q341 ~ 343 MUTING

• IC Block Diagram


IC101 CXA1372Q

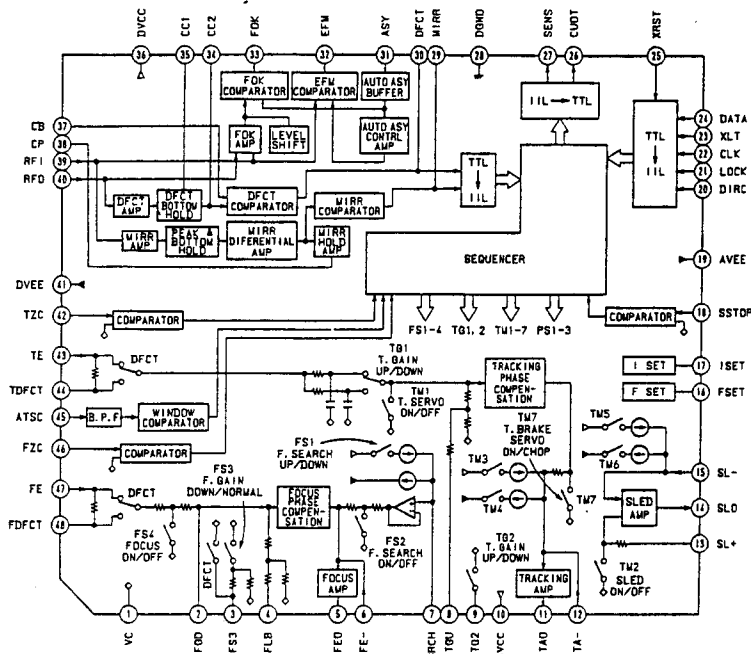


IC202 M5290P-16

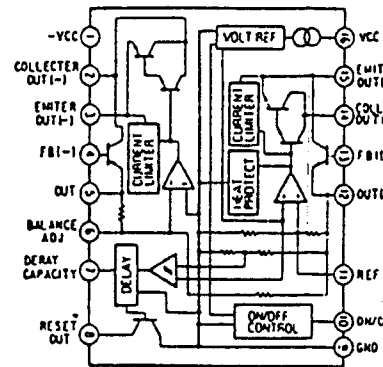


IC302 CXD1244S

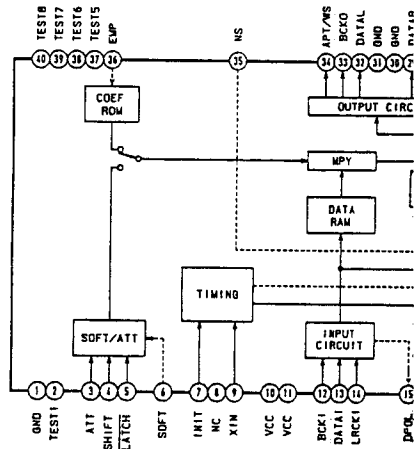





IC301 CXD2500AQ

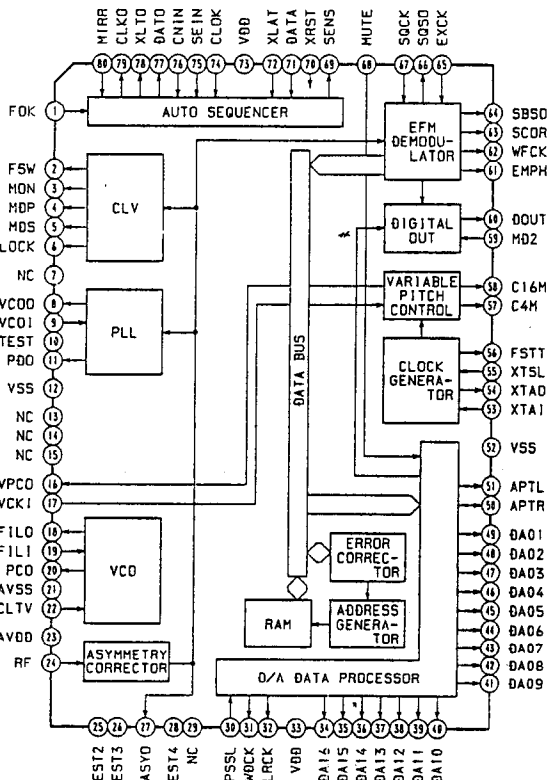


IC304 CXD2557M

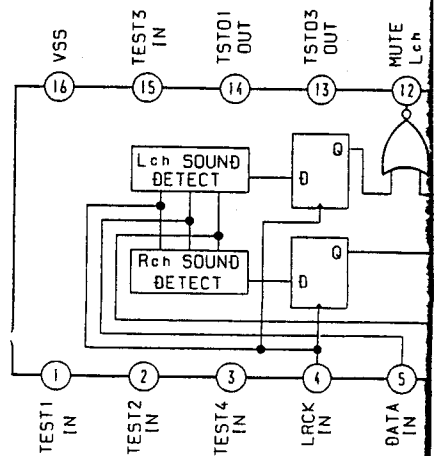

IC305 CXD2552Q-3

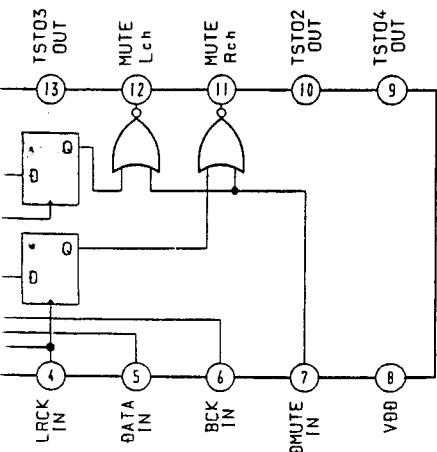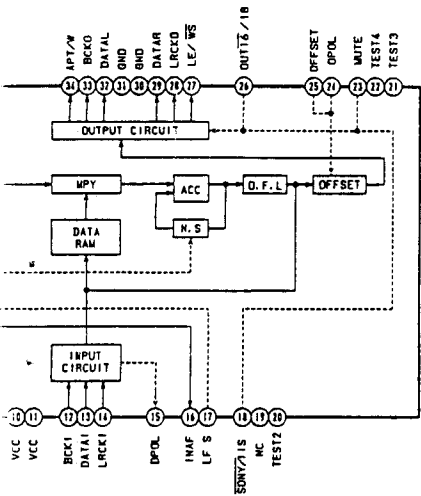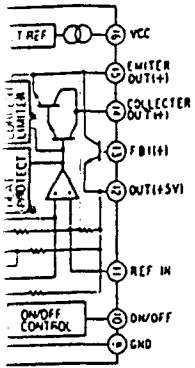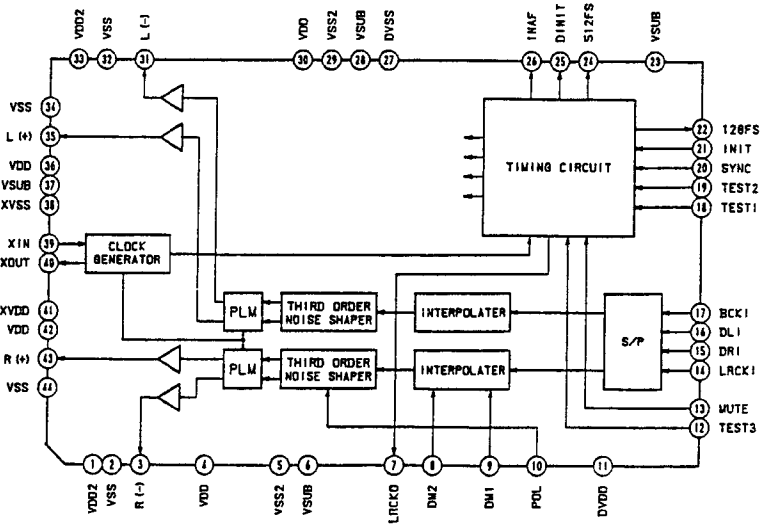


IC403 74HC175

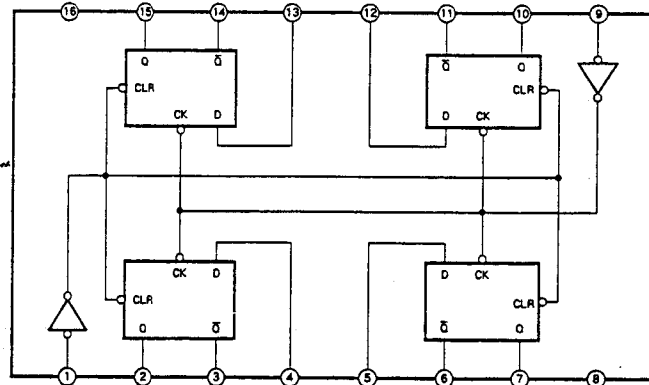






(2) CD MECHANISM SECTION (CDM14-5BD1)

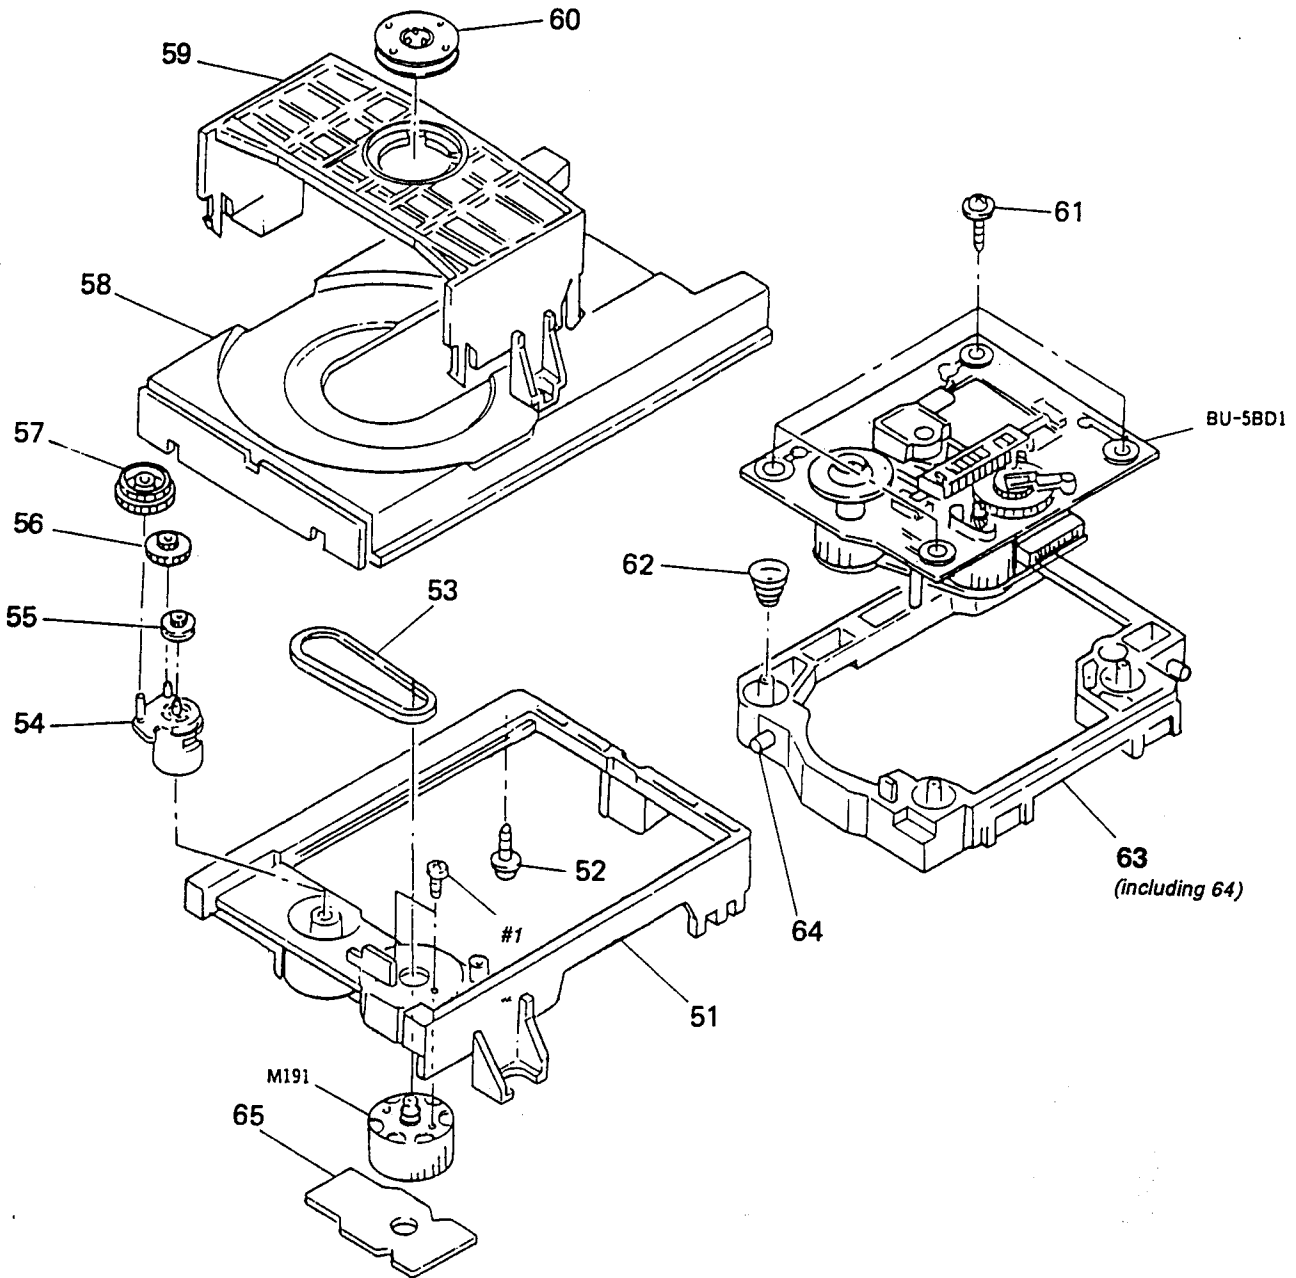

Ref. No.	Part No.	Description	Remark
51	4-933-111-01	CHASSIS (MD)	
52	* 4-917-583-21	BRACKET, YOKE	
53	4-927-649-01	BELT	
54	4-933-109-01	CAM	
55	4-927-651-01	PULLEY (S)	
56	4-927-628-01	GEAR (C)	
57	4-933-107-01	GEAR (PL)	
58	4-933-112-01	TABLE, DISK	

Ref. No.	Part No.	Description	Remark
59	4-933-110-01	HOLDER (MG)	
60	* 1-452-538-11	MAGNET	
61	4-933-134-01	SCREW (+PTPWH M2. 6X6)	
62	4-917-541-01	SPRING (B)	
63	4-933-129-01	HOLDER (BU)	
64	4-933-108-01	SHAFT (CAM)	
65	* 1-632-202-11	LOADING BOARD	
M191	A-4604-363-A	MOTOR (L) ASSY	

(3) OPTICAL PICK-UP BLOCK (BU-5BD1)

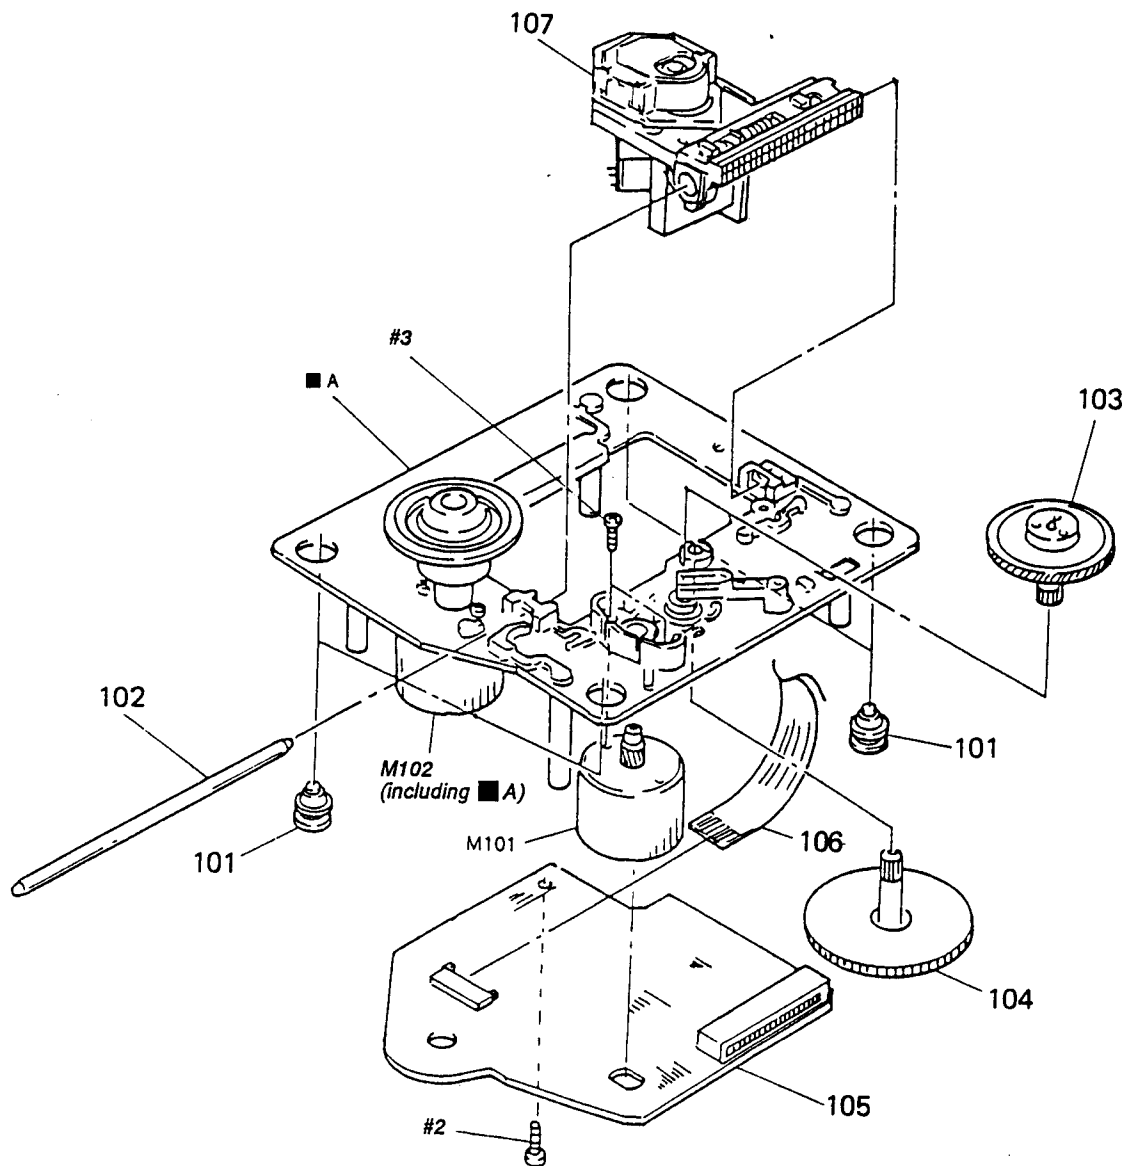

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	4-933-126-01	INSULATOR (A)		106	1-575-001-11	WIRE, FLAT TYPE (12 CORE)	
102	4-917-565-01	SHAFT, SLED		107	△ 8-848-144-11	DEVICE, OPTICAL KSS-240A	
103	4-917-567-01	GEAR (M)		M101	X-4917-523-3	BASE OUTSERT ASSY	
104	4-917-564-01	GEAR (P), FLATNESS		M102	X-4917-504-1	MOTOR ASSY, SLED	
105	* A-4617-161-A	BD BOARD, COMPLETE					

Note: The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

BD

## SECTION 6

### ELECTRICAL PARTS LIST

**NOTE:**

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- **RESISTORS**  
All resistors are in ohms.  
METAL: Metal-film resistor  
METAL OXIDE: Metal Oxide-film resistor  
F: nonflammable

- Items marked "\*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- **SEMICONDUCTORS**  
In each case,  $\mu$ , for example:  
uA...:  $\mu$ A..., uPA...:  $\mu$ PA...,  
uPB...:  $\mu$ PB..., uPC...:  $\mu$ PC...,  
uPD...:  $\mu$ PD...

- **CAPACITORS**  
uF:  $\mu$ F

- **COILS**  
uH:  $\mu$ H

The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque  $\Delta$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
	* A-4617-161-A	BD BOARD, COMPLETE *****				< CONNECTOR >	
		< CAPACITOR >					
C101	1-163-038-00	CERAMIC CHIP 0.1uF	25V	CN101	1-568-796-11	SOCKET, CONNECTOR 22P	
C102	1-163-989-11	CERAMIC CHIP 0.033uF	10% 25V	CN102	1-568-795-11	SOCKET, CONNECTOR 12P	
C103	1-126-163-11	ELECT 4.7uF	20% 50V	CN103	* 1-564-721-11	PIN, CONNECTOR (SMALL TYPE) 5P	
C104	1-163-038-00	CERAMIC CHIP 0.1uF	25V			< DIODE >	
C105	1-126-154-11	ELECT 47uF	20% 6.3V	D101	8-719-105-72	DIODE RD4.7M-B1	
C106	1-126-154-11	ELECT 47uF	20% 6.3V			< IC >	
C107	1-126-154-11	ELECT 47uF	20% 6.3V	IC101	8-752-050-82	IC CXA13720	
C108	1-163-038-00	CERAMIC CHIP 0.1uF	25V	IC102	8-759-822-36	IC LA6532M-T1	
C109	1-163-038-00	CERAMIC CHIP 0.1uF	25V	IC103	8-759-633-65	IC M54641L	
C110	1-163-989-11	CERAMIC CHIP 0.033uF	10% 25V			< JACK >	
C111	1-131-367-00	TANTALUM 22uF	10% 20V	J101	1-216-295-00	METAL CHIP 0	5% 1/10W
C112	1-164-232-11	CERAMIC CHIP 0.01uF	50V	J102	1-216-295-00	METAL CHIP 0	5% 1/10W
C113	1-164-232-11	CERAMIC CHIP 0.01uF	50V			< TRANSISTOR >	
C114	1-164-161-11	CERAMIC CHIP 0.0022uF	10% 100V	Q101	8-729-901-01	TRANSISTOR DTC144EK	
C115	1-164-161-11	CERAMIC CHIP 0.0022uF	10% 100V			< RESISTOR >	
C117	1-163-038-00	CERAMIC CHIP 0.1uF	25V	R101	1-216-097-00	METAL CHIP 100K	5% 1/10W
C118	1-163-038-00	CERAMIC CHIP 0.1uF	25V	R102	1-216-095-00	METAL CHIP 82K	5% 1/10W
C119	1-164-161-11	CERAMIC CHIP 0.0022uF	10% 100V	R103	1-216-091-00	METAL CHIP 56K	5% 1/10W
C120	1-163-989-11	CERAMIC CHIP 0.033uF	10% 25V	R104	1-216-099-00	METAL CHIP 120K	5% 1/10W
C151	1-163-019-00	CERAMIC CHIP 0.0068uF	10% 50V	R105	1-216-069-00	METAL CHIP 6.8K	5% 1/10W
C152	1-163-038-00	CERAMIC CHIP 0.1uF	25V	R106	1-216-061-00	METAL CHIP 3.3K	5% 1/10W
C153	1-163-006-11	CERAMIC CHIP 560PF	10% 50V	R107	1-216-114-00	METAL GLAZE 510K	5% 1/10W
C154	1-164-161-11	CERAMIC CHIP 0.0022uF	10% 100V	R108	1-216-105-00	METAL CHIP 220K	5% 1/10W
C155	1-163-023-00	CERAMIC CHIP 0.015uF	5% 50V	R109	1-216-061-00	METAL CHIP 3.3K	5% 1/10W
C171	1-163-038-00	CERAMIC CHIP 0.1uF	25V	R110	1-216-049-00	METAL CHIP 1K	5% 1/10W
C172	1-163-038-00	CERAMIC CHIP 0.1uF	25V				
C173	1-163-038-00	CERAMIC CHIP 0.1uF	25V				
C174	1-163-038-00	CERAMIC CHIP 0.1uF	25V				

**BD** **DISPLAY**

Ref. No.	Part No.	Description	Remark		
R111	1-216-049-00	METAL CHIP	1K	5%	1/10W
R112	1-216-083-00	METAL CHIP	27K	5%	1/10W
R113	1-216-071-00	METAL CHIP	8.2K	5%	1/10W
R114	1-216-105-00	METAL CHIP	220K	5%	1/10W
R152	1-216-073-00	METAL CHIP	10K	5%	1/10W
R153	1-216-085-00	METAL CHIP	33K	5%	1/10W
R154	1-216-085-00	METAL CHIP	33K	5%	1/10W
R155	1-216-093-00	METAL CHIP	68K	5%	1/10W
R156	1-216-081-00	METAL CHIP	22K	5%	1/10W
R157	1-216-079-00	METAL CHIP	18K	5%	1/10W
R158	1-216-079-00	METAL CHIP	18K	5%	1/10W
R159	1-216-079-00	METAL CHIP	18K	5%	1/10W
R160	1-216-049-00	METAL CHIP	1K	5%	1/10W
R171	1-216-001-00	METAL CHIP	10	5%	1/10W
R172	1-216-001-00	METAL CHIP	10	5%	1/10W
R173	1-216-001-00	METAL CHIP	10	5%	1/10W
R174	1-216-001-00	METAL CHIP	10	5%	1/10W
< VARIABLE RESISTOR >					
RV101	1-238-016-11	RES. ADJ. CARBON 10K			
RV102	1-238-016-11	RES. ADJ. CARBON 10K			
< SWITCH >					
S101	1-572-085-11	SWITCH, LEAF			
*****					
* 1-638-211-11 DISPLAY BOARD (MADE IN JAPAN)					
* 1-638-211-21 DISPLAY BOARD (MADE IN FRANCE)					
*****					
* 4-941-171-01 HOLDER (L)					
* 4-941-172-01 HOLDER (R)					
< CAPACITOR >					
C401	1-126-154-11	ELECT	47uF	20%	6.3V
C402	1-161-494-00	CERAMIC	0.022uF		25V
C412	1-162-207-31	CERAMIC	22PF	5%	50V
C413	1-162-207-31	CERAMIC	22PF	5%	50V
C414	1-162-207-31	CERAMIC	22PF	5%	50V
C415	1-162-207-31	CERAMIC	22PF	5%	50V
C416	1-162-207-31	CERAMIC	22PF	5%	50V
< CONNECTOR >					
CN401	1-535-872-11	JUMPER, FILM (WITH TERMINAL)			

Ref. No.	Part No.	Description	Remark		
< DIODE >					
D406	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D406	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D407	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D407	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D408	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D408	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D409	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D409	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D410	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D410	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D411	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D411	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D412	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D412	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D413	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D413	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D414	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D414	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D415	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D415	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D416	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)			
D416	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)			
D417	8-719-121-24	DIODE RD9. 1ES-L			
< FLUORESCENT INDICATOR >					
FLD401	1-519-618-21	INDICATOR TUBE, FLUORESCENT			
< IC >					
IC401	8-759-152-97	IC uPD75216ACW-864			
IC403	8-759-916-55	IC SN74HC175AN			
< TRANSISTOR >					
Q419	8-729-900-80	TRANSISTOR DTC114ES			
Q421	8-729-900-80	TRANSISTOR DTC114ES			
< RESISTOR >					
R401	1-249-435-11	CARBON	33K	5%	1/4W
R402	1-249-435-11	CARBON	33K	5%	1/4W
R403	1-249-435-11	CARBON	33K	5%	1/4W
R404	1-249-435-11	CARBON	33K	5%	1/4W
R405	1-249-435-11	CARBON	33K	5%	1/4W

DISPLAY

HP

KEY

Ref. No.	Part No.	Description	Remark		
R406	1-249-425-11	CARBON	4.7K	5%	1/4W
R407	1-249-425-11	CARBON	4.7K	5%	1/4W
R408	1-249-439-11	CARBON	68K	5%	1/4W
R409	1-249-435-11	CARBON	33K	5%	1/4W
R412	1-249-435-11	CARBON	33K	5%	1/4W
R413	1-249-435-11	CARBON	33K	5%	1/4W
R414	1-249-435-11	CARBON	33K	5%	1/4W
R415	1-249-435-11	CARBON	33K	5%	1/4W
R416	1-249-435-11	CARBON	33K	5%	1/4W

< SWITCH >

S441	1-554-303-21	SWITCH, TACTILE (■)	(MADE IN JAPAN)		
S441	1-554-303-81	SWITCH, TACTILE (■)	(MADE IN FRANCE)		
S442	1-554-303-21	SWITCH, TACTILE (>)	(MADE IN JAPAN)		
S442	1-554-303-81	SWITCH, TACTILE (>)	(MADE IN FRANCE)		
S443	1-554-303-21	SWITCH, TACTILE (▲)	(MADE IN JAPAN)		
S443	1-554-303-81	SWITCH, TACTILE (▲)	(MADE IN FRANCE)		

< CERAMIC >

X401 1-577-358-21 VIBRATOR, CERAMIC 4MHz

\*\*\*\*\*

- \* 1-638-214-11 HP BOARD (MADE IN JAPAN)
  - \* 1-638-214-21 HP BOARD (MADE IN FRANCE)
- \*\*\*\*\*

< CAPACITOR >

C481	1-162-294-31	CERAMIC	0.001uF	10%	50V
C482	1-162-294-31	CERAMIC	0.001uF	10%	50V
C483	1-164-159-11	CERAMIC	0.1uF		50V

< CONNECTOR >

CN481 \* 1-568-941-11 PIN, CONNECTOR 3P

< JACK >

J481 1-568-519-41 JACK, LARGE TYPE (PHONES)

< RESISTOR >

R481	1-249-402-11	CARBON	56	5%	1/4W
R482	1-249-402-11	CARBON	56	5%	1/4W

\*\*\*\*\*

- \* 1-638-212-11 KEY BOARD (MADE IN JAPAN)
  - \* 1-638-212-21 KEY BOARD (MADE IN FRANCE)
- \*\*\*\*\*

Ref. No.	Part No.	Description	Remark
	* 3-362-478-11	HOLDER (T), LED	
	* 4-942-546-01	HOLDER (LED/M)	

< CONNECTOR >

CN421	* 1-568-953-11	PIN, CONNECTOR 4P	
CN422	* 1-568-938-11	PIN, CONNECTOR 11P	
CN423	* 1-568-954-11	PIN, CONNECTOR 5P	

< DIODE >

D401	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)	
D401	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)	
D402	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)	
D402	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)	
D403	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)	
D403	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)	
D404	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)	
D404	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)	
D405	8-719-107-94	DIODE 1SS202-1 (MADE IN FRANCE)	
D405	8-719-987-63	DIODE 1N4148M (MADE IN JAPAN)	
D418	8-719-987-97	DIODE BR3371X	
D419	8-719-971-52	DIODE MAY3371X-M-177	
D420	8-719-987-97	DIODE BR3371X	
D421	8-719-987-XX	DIODE MBG3371X-14	

< RESISTOR >

R418	1-249-417-11	CARBON	1K	5%	1/4W
R419	1-249-410-11	CARBON	270	5%	1/4W
R420	1-249-417-11	CARBON	1K	5%	1/4W
R421	1-249-410-11	CARBON	270	5%	1/4W

< SWITCH > (MADE IN JAPAN)

S401	1-554-303-21	SWITCH, TACTILE (KX)	
S402	1-554-303-21	SWITCH, TACTILE (DX)	
S403	1-554-303-21	SWITCH, TACTILE (LX)	
S404	1-554-303-21	SWITCH, TACTILE (RX)	
S405	1-554-303-21	SWITCH, TACTILE (■)	
S406	1-554-303-21	SWITCH, TACTILE (TIME)	
S408	1-554-303-21	SWITCH, TACTILE (CONTINUE)	
S409	1-554-303-21	SWITCH, TACTILE (EDIT/TIME FADE)	
S410	1-554-303-21	SWITCH, TACTILE (TIME SET)	
S412	1-554-303-21	SWITCH, TACTILE (SHUFFLE)	
S413	1-554-303-21	SWITCH, TACTILE (>20)	
S414	1-554-303-21	SWITCH, TACTILE (CHECK)	
S415	1-554-303-21	SWITCH, TACTILE (CLEAR)	
S416	1-554-303-21	SWITCH, TACTILE (PGM)	
S417	1-554-303-21	SWITCH, TACTILE (PEAK SEARCH)	

**KEY**      **LOADING**      **MAIN**

Ref. No.	Part No.	Description	Remark
S418	1-554-303-21	SWITCH, TACTILE (REPEAT)	
S419	1-554-303-21	SWITCH, TACTILE (FADER)	
S420	1-554-303-21	SWITCH, TACTILE (MUSIC SCAN)	
S421	1-554-303-21	SWITCH, TACTILE (1)	
S422	1-554-303-21	SWITCH, TACTILE (6)	
S423	1-554-303-21	SWITCH, TACTILE (11)	
S424	1-554-303-21	SWITCH, TACTILE (16)	
S425	1-554-303-21	SWITCH, TACTILE (2)	
S426	1-554-303-21	SWITCH, TACTILE (7)	
S427	1-554-303-21	SWITCH, TACTILE (12)	
S428	1-554-303-21	SWITCH, TACTILE (17)	
S429	1-554-303-21	SWITCH, TACTILE (3)	
S430	1-554-303-21	SWITCH, TACTILE (8)	
S431	1-554-303-21	SWITCH, TACTILE (13)	
S432	1-554-303-21	SWITCH, TACTILE (18)	
S433	1-554-303-21	SWITCH, TACTILE (4)	
S434	1-554-303-21	SWITCH, TACTILE (9)	
S435	1-554-303-21	SWITCH, TACTILE (14)	
S436	1-554-303-21	SWITCH, TACTILE (19)	
S437	1-554-303-21	SWITCH, TACTILE (5)	
S438	1-554-303-21	SWITCH, TACTILE (10)	
S439	1-554-303-21	SWITCH, TACTILE (15)	
S440	1-554-303-21	SWITCH, TACTILE (20)	
S444	1-554-303-21	SWITCH, TACTILE (A. SPACE/A. CUE)	(MADE IN JAPAN)
< SWITCH > (MADE IN FRANCE)			
S401	1-554-303-81	SWITCH, TACTILE (◀▶)	
S402	1-554-303-81	SWITCH, TACTILE (◀▶)	
S403	1-554-303-81	SWITCH, TACTILE (◀◀)	
S404	1-554-303-81	SWITCH, TACTILE (▶▶)	
S405	1-554-303-81	SWITCH, TACTILE (■)	
S406	1-554-303-81	SWITCH, TACTILE (TIME)	
S408	1-554-303-81	SWITCH, TACTILE (CONTINUE)	
S409	1-554-303-81	SWITCH, TACTILE (EDIT/TIME FADE)	
S410	1-554-303-81	SWITCH, TACTILE (TIME SET)	
S412	1-554-303-81	SWITCH, TACTILE (SHUFFLE)	
S413	1-554-303-81	SWITCH, TACTILE (>20)	
S414	1-554-303-81	SWITCH, TACTILE (CHECK)	
S415	1-554-303-81	SWITCH, TACTILE (CLEAR)	
S416	1-554-303-81	SWITCH, TACTILE (PGM)	
S417	1-554-303-81	SWITCH, TACTILE (PEAK SEARCH)	
S418	1-554-303-81	SWITCH, TACTILE (REPEAT)	
S419	1-554-303-81	SWITCH, TACTILE (FADER)	
S420	1-554-303-81	SWITCH, TACTILE (MUSIC SCAN)	
S421	1-554-303-81	SWITCH, TACTILE (1)	
S422	1-554-303-81	SWITCH, TACTILE (6)	

Ref. No.	Part No.	Description	Remark
S423	1-554-303-81	SWITCH, TACTILE (11)	
S424	1-554-303-81	SWITCH, TACTILE (16)	
S425	1-554-303-81	SWITCH, TACTILE (2)	
S426	1-554-303-81	SWITCH, TACTILE (7)	
S427	1-554-303-81	SWITCH, TACTILE (12)	
S428	1-554-303-81	SWITCH, TACTILE (17)	
S429	1-554-303-81	SWITCH, TACTILE (3)	
S430	1-554-303-81	SWITCH, TACTILE (8)	
S431	1-554-303-81	SWITCH, TACTILE (13)	
S432	1-554-303-81	SWITCH, TACTILE (18)	
S433	1-554-303-81	SWITCH, TACTILE (4)	
S434	1-554-303-81	SWITCH, TACTILE (9)	
S435	1-554-303-81	SWITCH, TACTILE (14)	
S436	1-554-303-81	SWITCH, TACTILE (19)	
S437	1-554-303-81	SWITCH, TACTILE (5)	
S438	1-554-303-81	SWITCH, TACTILE (10)	
S439	1-554-303-81	SWITCH, TACTILE (15)	
S440	1-554-303-81	SWITCH, TACTILE (20)	
S444	1-554-303-81	SWITCH, TACTILE (A. SPACE/A. CUE)	(MADE IN FRANCE)
*****			
* 1-632-202-11 LOADING BOARD (MADE IN JAPAN)			
* 1-632-202-21 LOADING BOARD (MADE IN FRANCE)			
*****			
< CONNECTOR >			
CN301	* 1-564-707-11	PIN, CONNECTOR (SMALL TYPE) 5P	
< SWITCH >			
S271	1-572-086-11	SWITCH, LEAF (OUT SW)	
S272	1-572-086-11	SWITCH, LEAF (IN SW)	
*****			
* A-4617-911-A MAIN BOARD, COMPLETE (US, Canadian)			
* A-4617-912-A MAIN BOARD, COMPLETE			
(MADE IN JAPAN:AEP)			
* A-4617-730-A MAIN BOARD, COMPLETE			
(MADE IN FRANCE:AEP, UK)			
*****			
* 4-941-237-01 HEAT SINK			
7-682-547-09 SCREW +B 3X6			
< CAPACITOR >			
C201	1-124-572-11	ELECT	100uF 20% 63V
C202	1-126-059-11	ELECT	10uF 20% 50V
C203	1-124-887-00	ELECT	3300uF 20% 16V
C204	1-126-937-11	ELECT	4700uF 20% 16V
C205	1-126-163-11	ELECT	4.7uF 20% 50V

MAIN

Ref. No.	Part No.	Description	Remark		
C206	1-126-059-11	ELECT	10uF	20%	50V
C207	1-126-059-11	ELECT	10uF	20%	50V
C208	1-124-997-11	ELECT	470uF	20%	10V
C209	1-124-997-11	ELECT	470uF	20%	10V
C210	1-126-024-11	ELECT	220uF	20%	16V
C211	1-124-997-11	ELECT	470uF	20%	10V
C212	1-124-997-11	ELECT	470uF	20%	10V
C221	1-164-159-11	CERAMIC	0.1uF		50V
C301	1-126-022-11	ELECT	47uF	20%	16V
C302	1-126-301-11	ELECT	1uF	20%	50V
C311	1-130-491-00	MYLAR	0.047uF	5%	50V
C312	1-161-374-11	CERAMIC	0.0015uF	20%	50V
C313	1-161-494-00	CERAMIC	0.022uF		25V
C314	1-162-306-11	CERAMIC	0.01uF	20%	16V
C315	1-126-300-11	ELECT	0.47uF	20%	50V
C316	1-161-494-00	CERAMIC	0.022uF		25V
C317	1-164-159-11	CERAMIC	0.1uF		50V
C321	1-161-494-00	CERAMIC	0.022uF		25V
C331	1-162-208-31	CERAMIC	24PF	5%	50V
C332	1-130-495-00	MYLAR	0.1uF	5%	50V
C333	1-161-494-00	CERAMIC	0.022uF		25V
C334	1-161-494-00	CERAMIC	0.022uF		25V
C335	1-162-205-31	CERAMIC	18PF	5%	50V
C341	1-161-494-00	CERAMIC	0.022uF		25V
C342	1-126-022-11	ELECT	47uF	20%	16V
C343	1-161-494-00	CERAMIC	0.022uF		25V
C344	1-161-494-00	CERAMIC	0.022uF		25V
C345	1-126-022-11	ELECT	47uF	20%	16V
C346	1-164-159-11	CERAMIC	0.1uF		50V
C347	1-126-022-11	ELECT	47uF	20%	16V
C348	1-164-159-11	CERAMIC	0.1uF		50V
C349	1-161-494-00	CERAMIC	0.022uF		25V
C350	1-126-022-11	ELECT	47uF	20%	16V
C351	1-161-494-00	CERAMIC	0.022uF		25V
C352	1-126-022-11	ELECT	47uF	20%	16V
C353	1-162-199-31	CERAMIC	10PF	5%	50V
C354	1-162-199-31	CERAMIC	10PF	5%	50V
C355	1-161-494-00	CERAMIC	0.022uF		25V
C356	1-126-022-11	ELECT	47uF	20%	16V
C357	1-124-997-11	ELECT	470uF	20%	10V
C361	1-162-285-31	CERAMIC	180PF	10%	50V
C362	1-162-285-31	CERAMIC	180PF	10%	50V
C363	1-162-283-31	CERAMIC	120PF	10%	50V
C364	1-162-283-31	CERAMIC	120PF	10%	50V
C365	1-162-283-31	CERAMIC	120PF	10%	50V
C366	1-162-283-31	CERAMIC	120PF	10%	50V
C367	1-161-494-00	CERAMIC	0.022uF		25V
C368	1-161-494-00	CERAMIC	0.022uF		25V
C371	1-130-479-00	MYLAR	0.0047uF	5%	50V

Ref. No.	Part No.	Description	Remark		
C372	1-130-479-00	MYLAR	0.0047uF	5%	50V
C373	1-130-472-00	MYLAR	0.0012uF	5%	50V
C374	1-130-472-00	MYLAR	0.0012uF	5%	50V
C375	1-161-494-00	CERAMIC	0.022uF		25V
C376	1-161-494-00	CERAMIC	0.022uF		25V
C377	1-126-022-11	ELECT	47uF	20%	16V
C378	1-126-022-11	ELECT	47uF	20%	16V
C379	1-130-474-00	MYLAR	0.0018uF	5%	50V
C380	1-130-474-00	MYLAR	0.0018uF	5%	50V
C391	1-162-286-31	CERAMIC	220PF	10%	50V
C393	1-164-159-11	CERAMIC	0.1uF		50V

< CONNECTOR >

CN201	*-1-580-230-11	PIN, CONNECTOR (PC BOARD)	3P
CN301	* 1-568-844-11	SOCKET, CONNECTOR	29P
CN302	* 1-568-822-11	SOCKET, CONNECTOR	22P
CN381	* 1-564-708-11	PIN, CONNECTOR (SMALL TYPE)	6P
CN382	* 1-564-707-11	PIN, CONNECTOR (SMALL TYPE)	5P

< DIODE >

D201	8-719-200-82	DIODE	11ES2
D202	8-719-109-96	DIODE	RD6. 8ES-81
D203	8-719-200-82	DIODE	11ES2
D204	8-719-200-82	DIODE	11ES2
D205	8-719-200-82	DIODE	11ES2
D206	8-719-200-82	DIODE	11ES2
D207	8-719-114-49	DIODE	RD7. 5JS-B2
D208	8-719-109-89	DIODE	RD5. 6ES-B2
D209	8-719-107-94	DIODE	1SS202-1 (MADE IN FRANCE)
D209	8-719-987-63	DIODE	1N4148M (MADE IN JAPAN)
D341	8-719-210-21	DIODE	11EQS04
D351	8-719-107-94	DIODE	1SS202-1 (MADE IN FRANCE)
D351	8-719-987-63	DIODE	1N4148M (MADE IN JAPAN)

< IC >

IC201	8-759-633-42	IC	M5293L
IC202	8-759-630-21	IC	M5290P-16
IC203	8-759-945-58	IC	RC4558P
IC301	8-752-337-26	IC	CXD2500AQ
IC302	8-752-328-61	IC	CXD1244S
IC303	8-759-917-18	IC	SN74HCU04AN
IC304	8-752-339-86	IC	CXD2557M
IC305	8-752-335-53	IC	CXD2552Q-3
IC306	8-759-990-82	IC	TL082CP
IC307	8-759-900-72	IC	NE5532P
IC391	8-749-921-20	IC	T-1550

Note: The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety. Replace only with part number specified.



MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
< JACK >							
J381	* 1-569-443-11	JACK, PIN 4P (LINE OUT) (AEP, UK)		R301	1-249-417-11	CARBON 1K 5% 1/4W	
J381	* 1-569-443-21	JACK, PIN 4P (LINE OUT) (US, Canadian)		R302	1-249-417-11	CARBON 1K 5% 1/4W	
< COIL >							
L331	1-408-403-00	INDUCTOR 3.3uH		R303	1-249-421-11	CARBON 2.2K 5% 1/4W	
< LINK >							
PS201	1-532-685-00	LINK, IC		R304	1-249-417-11	CARBON 1K 5% 1/4W	
PS202	1-532-637-00	LINK, IC 1.0A		R305	1-249-411-11	CARBON 330 5% 1/4W	
< TRANSISTOR >							
Q201	8-729-119-76	TRANSISTOR 2SA1175-HFE		R311	1-249-423-11	CARBON 3.3K 5% 1/4W	
Q202	8-729-140-96	TRANSISTOR 2SD774-34		R312	1-249-429-11	CARBON 10K 5% 1/4W	
Q203	8-729-821-73	TRANSISTOR 2SB1274SA-RS		R313	1-249-423-11	CARBON 3.3K 5% 1/4W	
Q204	8-729-900-65	TRANSISTOR DTA144ES		R314	1-249-429-11	CARBON 10K 5% 1/4W	
Q205	8-729-900-89	TRANSISTOR DTC144ES		R315	1-249-417-11	CARBON 1K 5% 1/4W	
Q206	8-729-900-89	TRANSISTOR DTC144ES		R316	1-249-417-11	CARBON 1K 5% 1/4W	
Q207	8-729-230-45	TRANSISTOR 2SC2458-YGR		R317	1-249-420-11	CARBON 1.8K 5% 1/4W	
Q208	8-729-821-73	TRANSISTOR 2SB1274SA-RS		R318	1-249-441-11	CARBON 100K 5% 1/4W	
Q209	8-729-281-52	TRANSISTOR 2SC1815-Y		R321	1-249-417-11	CARBON 1K 5% 1/4W	
Q341	8-729-900-65	TRANSISTOR DTA144ES		R322	1-249-417-11	CARBON 1K 5% 1/4W	
Q342	8-729-900-65	TRANSISTOR DTA144ES		R323	1-249-417-11	CARBON 1K 5% 1/4W	
Q343	8-729-900-65	TRANSISTOR DTA144ES		R324	1-249-418-11	CARBON 1.2K 5% 1/4W	
Q344	8-729-900-89	TRANSISTOR DTC144ES		R331	1-249-409-11	CARBON 220 5% 1/4W (MADE IN FRANCE)	
Q371	8-729-141-30	TRANSISTOR 2SC3623A-LK		R331	1-249-413-11	CARBON 470 5% 1/4W (MADE IN JAPAN)	
Q372	8-729-141-30	TRANSISTOR 2SC3623A-LK		R332	1-247-887-00	CARBON 220K 5% 1/4W	
Q373	8-729-141-30	TRANSISTOR 2SC3623A-LK		R333	1-249-417-11	CARBON 1K 5% 1/4W	
Q374	8-729-141-30	TRANSISTOR 2SC3623A-LK		R334	1-249-409-11	CARBON 220 5% 1/4W	
Q375	8-729-231-55	TRANSISTOR 2SC2878-AB		R341	1-249-393-11	CARBON 10 5% 1/4W	
Q376	8-729-231-55	TRANSISTOR 2SC2878-AB		R342	1-249-417-11	CARBON 1K 5% 1/4W	
Q393	8-729-920-68	TRANSISTOR 2SA933S-OR		R343	1-249-441-11	CARBON 100K 5% 1/4W	
< RESISTOR >							
R201	1-249-435-11	CARBON 33K 5% 1/4W		R344	1-249-441-11	CARBON 100K 5% 1/4W	
R202	1-249-438-11	CARBON 56K 5% 1/4W		R345	1-249-425-11	CARBON 4.7K 5% 1/4W	
R203	1-249-429-11	CARBON 10K 5% 1/4W		R346	1-249-425-11	CARBON 4.7K 5% 1/4W	
R204	1-249-425-11	CARBON 4.7K 5% 1/4W		R347	1-249-441-11	CARBON 100K 5% 1/4W	
R205	1-249-425-11	CARBON 4.7K 5% 1/4W		R348	1-249-429-11	CARBON 10K 5% 1/4W	
R206	1-249-417-11	CARBON 1K 5% 1/4W		R351	1-249-429-11	CARBON 10K 5% 1/4W	
R207	1-249-417-11	CARBON 1K 5% 1/4W		R352	1-249-429-11	CARBON 10K 5% 1/4W	
R208	1-249-423-11	CARBON 3.3K 5% 1/4W		R353	1-249-429-11	CARBON 10K 5% 1/4W	
R209	1-249-413-11	CARBON 470 5% 1/4W		R354	1-249-429-11	CARBON 10K 5% 1/4W	
R210	1-249-429-11	CARBON 10K 5% 1/4W		R355	1-247-848-11	CARBON 5.1K 5% 1/4W	
R211	1-249-410-11	CARBON 270 5% 1/4W		R356	1-249-401-11	CARBON 47 5% 1/4W	
R212	1-249-385-11	CARBON 2.2 5% 1/6W		R361	1-247-840-00	CARBON 2.4K 5% 1/4W	
R213	1-249-385-11	CARBON 2.2 5% 1/6W		R362	1-247-840-00	CARBON 2.4K 5% 1/4W	
R214	1-249-417-11	CARBON 1K 5% 1/4W		R363	1-247-840-00	CARBON 2.4K 5% 1/4W	
R364	1-247-840-00	CARBON 2.4K 5% 1/4W		R364	1-247-840-00	CARBON 2.4K 5% 1/4W	
R365	1-249-432-11	CARBON 18K 5% 1/4W		R365	1-249-432-11	CARBON 18K 5% 1/4W	
R366	1-249-432-11	CARBON 18K 5% 1/4W		R367	1-249-432-11	CARBON 18K 5% 1/4W	
R367	1-249-432-11	CARBON 18K 5% 1/4W		R368	1-249-432-11	CARBON 18K 5% 1/4W	
R368	1-249-432-11	CARBON 18K 5% 1/4W		R369	1-249-419-11	CARBON 1.5K 5% 1/4W	
R370	1-249-419-11	CARBON 1.5K 5% 1/4W		R370	1-249-419-11	CARBON 1.5K 5% 1/4W	
R371	1-249-419-11	CARBON 1.5K 5% 1/4W		R371	1-249-419-11	CARBON 1.5K 5% 1/4W	
R372	1-249-419-11	CARBON 1.5K 5% 1/4W		R372	1-249-419-11	CARBON 1.5K 5% 1/4W	

**MAIN**

**MOTOR VR**

**POWER SW**

Ref. No.	Part No.	Description	Remark		
R373	1-247-887-00	CARBON	220K	5%	1/4W
R374	1-247-887-00	CARBON	220K	5%	1/4W
R375	1-249-409-11	CARBON	220	5%	1/4W
R376	1-249-409-11	CARBON	220	5%	1/4W
R377	1-249-409-11	CARBON	220	5%	1/4W
R378	1-249-409-11	CARBON	220	5%	1/4W
R379	1-249-425-11	CARBON	4.7K	5%	1/4W
R380	1-249-425-11	CARBON	4.7K	5%	1/4W
R381	1-249-425-11	CARBON	4.7K	5%	1/4W
R382	1-249-425-11	CARBON	4.7K	5%	1/4W
R383	1-249-414-11	CARBON	560	5%	1/4W
R384	1-249-414-11	CARBON	560	5%	1/4W
R385	1-249-393-11	CARBON	10	5%	1/4W
R386	1-249-393-11	CARBON	10	5%	1/4W
R389	1-249-414-11	CARBON	560	5%	1/4W
R390	1-249-414-11	CARBON	560	5%	1/4W
R392	1-249-405-11	CARBON	100	5%	1/4W
R393	1-249-406-11	CARBON	120	5%	1/4W
R394	1-249-435-11	CARBON	33K	5%	1/4W

< SWITCH >

S201  $\Delta$  1-571-722-11 SWITCH, VOLTAGE SELECTION  
(110-120V/220-240V)

< CRYSTAL >

X351 1-579-161-11 VIBRATOR, CRYSTAL 45MHZ

\*\*\*\*\*

- \* 1-638-213-11 MOTOR VR BOARD (MADE IN JAPAN)
  - \* 1-638-213-21 MOTOR VR BOARD (MADE IN FRANCE)
- \*\*\*\*\*

- \* 4-922-980-01 HOLDER (LED)

< CAPACITOR >

C451	1-124-994-11	ELECT	100uF	20%	10V
C452	1-124-994-11	ELECT	100uF	20%	10V
C471	1-124-994-11	ELECT	100uF	20%	10V
C472	1-124-277-11	ELECT	4.7uF	20%	35V

< CONNECTOR >

- .CN451 \* 1-564-708-11 PIN, CONNECTOR (SMALL TYPE) 6P
- CN471 \* 1-564-707-11 PIN, CONNECTOR (SMALL TYPE) 5P
- CN472 \* 1-568-941-11 PIN, CONNECTOR 3P

< DIODE >

D471 8-719-970-49 DIODE BR4361F

Ref. No.	Part No.	Description	Remark		
< IC >					
IC451	8-759-981-89	IC RC4556S			
IC471	8-759-962-08	IC BA6208			
< RESISTOR >					
R451	1-249-435-11	CARBON	33K	5%	1/4W
R452	1-249-435-11	CARBON	33K	5%	1/4W
R453	1-249-432-11	CARBON	18K	5%	1/4W
R454	1-249-432-11	CARBON	18K	5%	1/4W
R455	1-249-422-11	CARBON	2.7K	5%	1/4W
R456	1-249-422-11	CARBON	2.7K	5%	1/4W
R457	1-249-429-11	CARBON	10K	5%	1/4W
R458	1-249-429-11	CARBON	10K	5%	1/4W
R461	1-249-399-11	CARBON	33	5%	1/4W
R462	1-249-399-11	CARBON	33	5%	1/4W
R471	1-249-411-11	CARBON	330	5%	1/4W
R472	1-249-417-11	CARBON	1K	5%	1/4W
R473	1-249-417-11	CARBON	1K	5%	1/4W

< VARIABLE RESISTOR >

RV451 1-241-302-11 RES. VAR. CARBON 10K/10K (PHONE LEVEL)

\*\*\*\*\*

- \* 1-638-215-11 POWER SW BOARD (MADE IN JAPAN)
  - \* 1-638-215-21 POWER SW BOARD (MADE IN FRANCE)
- \*\*\*\*\*

< CAPACITOR >

C491 1-161-494-00 CERAMIC 0.022uF 25V

< CONNECTOR >

CN491 \* 1-568-934-11 PIN, CONNECTOR 7P

< IC >

IC491 8-749-922-36 IC GP1U50XB

< SWITCH >

- S491 1-554-118-00 SWITCH, PUSH (1 KEY) (POWER)
- S492 1-554-481-00 SWITCH, SLIDE (TIMER)

Note: The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
MISCELLANEOUS *****			
38	1-575-002-11	WIRE, FLAT TYPE (22 CORE)	
40	△ 1-558-945-21	CORD, POWER (US, Canadian)	
40	△ 1-574-127-31	CORD, POWER (MADE IN FRANCE:AEP)	
40	△ 1-574-390-31	CORD, POWER (UK)	
40	△ 1-575-651-21	CORD, POWER (MADE IN JAPAN:AEP)	
60	* 1-452-538-11	MAGNET	
106	1-575-001-11	WIRE, FLAT TYPE (12 CORE)	
107	△ 8-848-144-11	DEVICE, OPTICAL KSS-240A	
M101	X-4917-523-3	BASE OUTSERT ASSY	
M102	X-4917-504-1	MOTOR ASSY, SLED	
M191	A-4604-363-A	MOTOR (L) ASSY	
PT101	△ 1-449-921-11	TRANSFORMER, POWER (US, Canadian)	
PT101	△ 1-449-922-11	TRANSFORMER, POWER (MADE IN JAPAN:AEP)	
PT101	△ 1-449-925-11	TRANSFORMER, POWER (MADE IN FRANCE:AEP, UK)	

\*\*\*\*\*

ACCESSORY & PACKING MATERIAL  
\*\*\*\*\*

- 1-465-594-11 COMMANDER, REMOTE (RM-D791)
- 1-558-271-11 CORD, CONNECTION (MADE IN FRANCE:AEP, UK)
- 1-559-533-11 CORD, CONNECTION  
(Canadian, MADE IN JAPAN, AEP)
- \* 3-704-343-01 SHEET (STANDARD), PROTECTION
- 3-707-584-01 COVER, BATTERY
- 3-752-690-11 MANUAL, INSTRUCTION (ENGLISH, FRENCH,  
SPANISH, PORTUGUESE) (MADE IN JAPAN:AEP)
- 3-752-690-21 MANUAL, INSTRUCTION (ENGLISH)  
(US, Canadian)
- 3-752-690-41 MANUAL, INSTRUCTION (GERMAN, DUTCH,  
SWEDISH, ITALIAN) (MADE IN JAPAN:AEP)
- 3-752-690-51 MANUAL, INSTRUCTION (ENGLISH, FRENCH,  
SPANISH, PORTUGUESE) (MADE IN FRANCE:AEP, UK)
- 3-752-690-61 MANUAL, INSTRUCTION (GERMAN, DUTCH,  
SWEDISH, ITALIAN) (MADE IN FRANCE:AEP)
- 3-795-629-11 INSTRUCTION
- \* 4-941-548-01 LABEL, CLASS 1 (AEP, UK)
- \* 4-941-925-01 CUSHION
- \* 4-944-108-11 INDIVIDUAL CARTON

Ref. No.	Part No.	Description	Remark
HARDWARE LIST			
# 1	7-621-775-10	SCREW +B 2.6X4	
# 2	7-685-134-19	SCREW +BTP 2.6X8 TYPE2 N-S	
# 3	7-621-255-15	SCREW +P 2X3	
# 4	7-682-547-04	SCREW +BVTT 3X6 (S)	
# 5	7-682-547-09	SCREW +B 3X6	
# 6	7-682-548-09	SCREW +BVTT 3X8 (S)	
# 7	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S	
# 8	7-685-647-79	SCREW +BVTP 3X10 TYPE2 N-S	
# 9	7-685-870-01	SCREW +BVTT 3X5 (S)	

**Note:** The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.