



Fender[®]

MADE IN U.S.A.

PRECISION BASS


MANUAL NO. 033512 (REV. B)

**OWNER'S
MANUAL**

PRECISION BASS

Your new Fender Bass incorporates the highest standards of craftsmanship and quality components. As a Fender owner you can be proud and self-assured in the knowledge that you have the finest.

Your playing pleasure will be enhanced if you become thoroughly acquainted with all of the features of your instrument. Please read this manual carefully and completely. If you need more information contact your authorized Fender dealer.

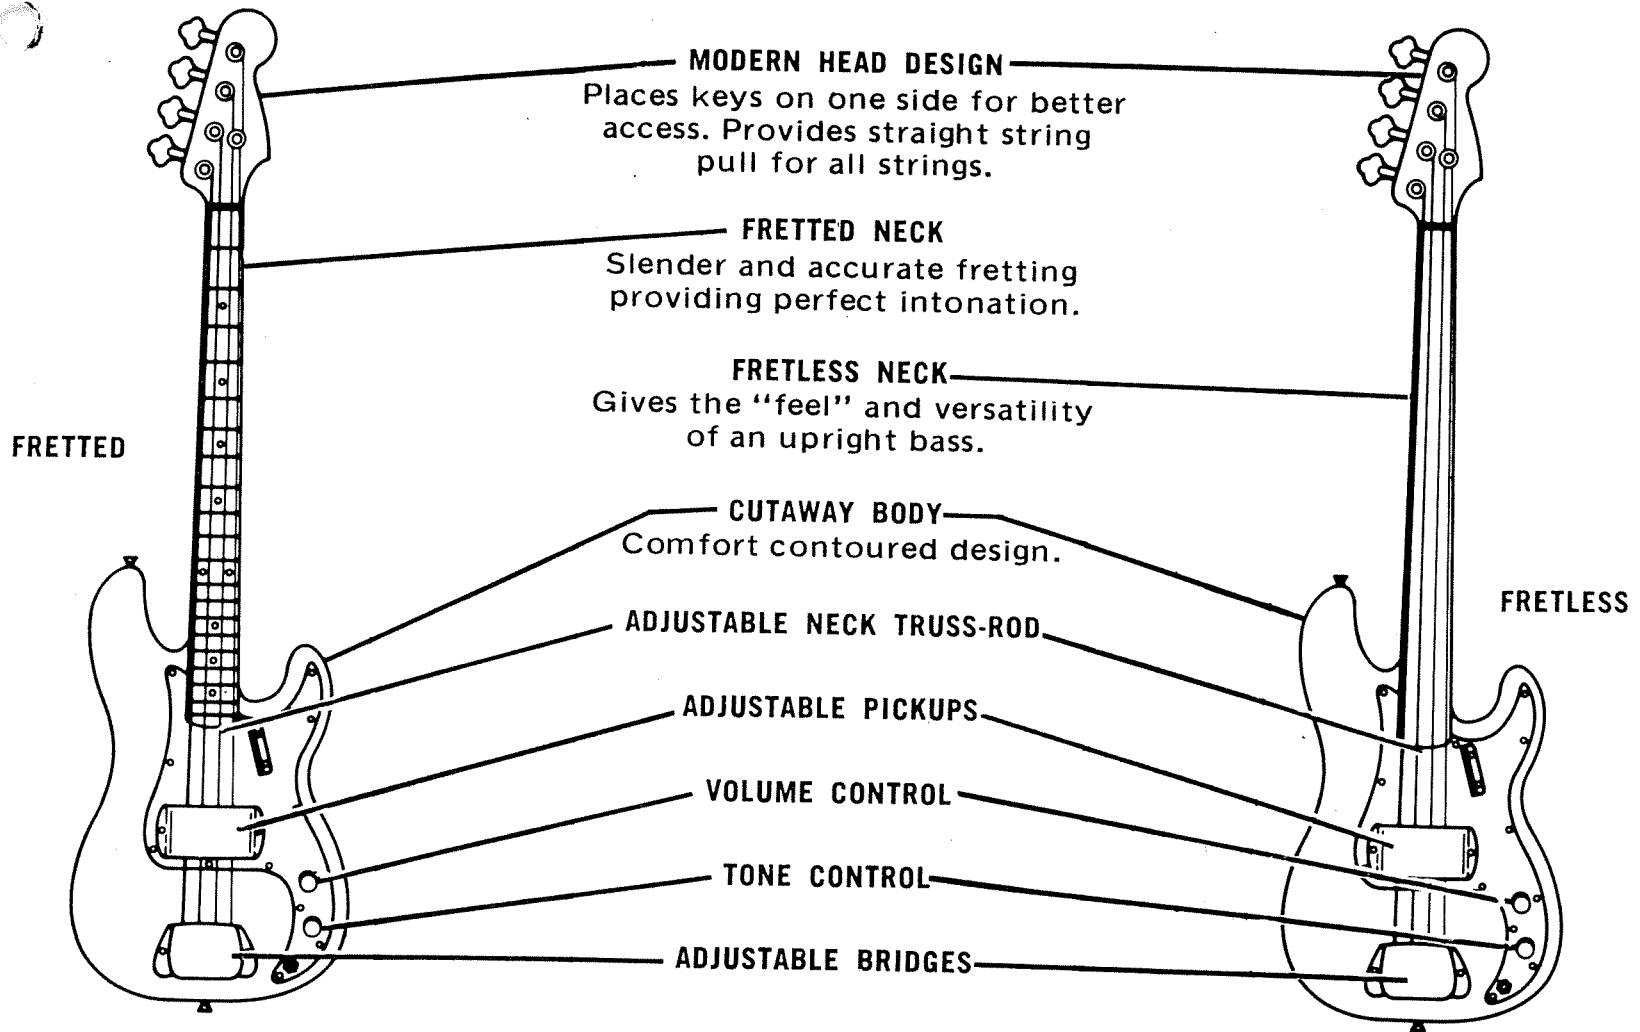

MODERN HEAD DESIGN

Places keys on one side for better access. Provides straight string pull for all strings.

FRETTED NECK

Slender and accurate fretting providing perfect intonation.

FRETLESS NECK

Gives the "feel" and versatility of an upright bass.

CUTAWAY BODY

Comfort contoured design.

ADJUSTABLE NECK TRUSS-ROD

ADJUSTABLE PICKUPS

VOLUME CONTROL

TONE CONTROL

ADJUSTABLE BRIDGES

FRETTED

FRETLESS


Low string action makes for easier playing but if the strings are too low they will buzz on the frets.

STRING LENGTH ADJUSTMENT

There are four string length adjustment screws, as shown. If a string sounds flat when played at the twelfth fret, compared with the open string harmonic at the same fret, the adjustment screw should be turned counter-clockwise to shorten the string. If a string sounds sharp to the harmonic, the screw should be turned clockwise to lengthen the string.

There are eight string height adjustment screws, as shown. To raise the strings turn the adjustment screws clockwise. To lower the strings turn the adjustment screws counter-clockwise.

STRING HEIGHT ADJUSTMENT

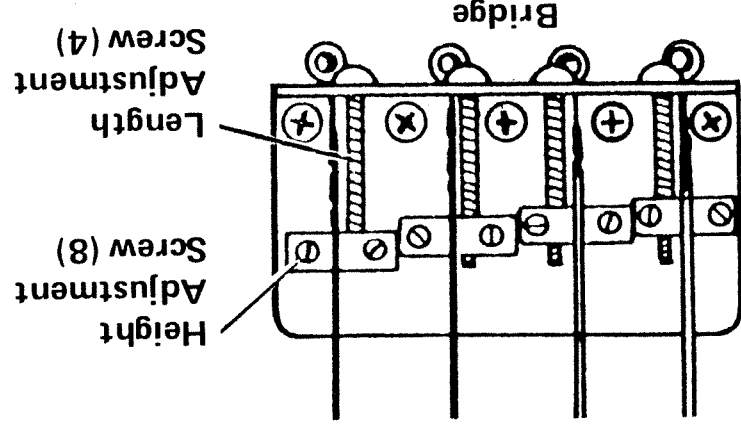


ADJUSTABLE NECK TRUSS ROD

The Neck Adjustment Nut is located at the body end of the neck. If the neck is bowed away from the strings the nut should be tightened (clockwise). If the neck is bowed toward the strings the nut should be loosened (counterclockwise). Use a flat head screwdriver with a tip approximately 1/8" wide (too large a tip will damage the pickguard). Usually a quarter turn or less is required. While turning the screw it is helpful to apply pressure to the neck in the same direction as the required adjustment.

PICKUP ADJUSTMENT


There are two height adjustment screws, one at each end of the pickup. Turn the screws clockwise to raise and counterclockwise to lower the pickup.

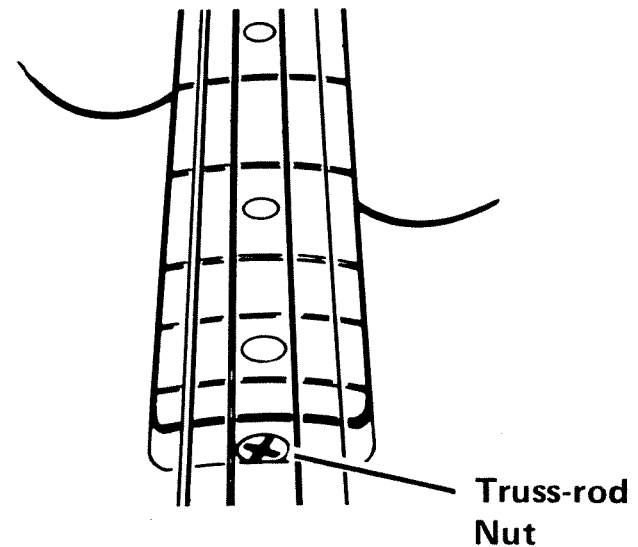

ACCESSORIES FOR YOUR FENDER GUITAR

F-90 BRIGHT SET NICKEL
ROUND WOUND

Electric Bass Strings

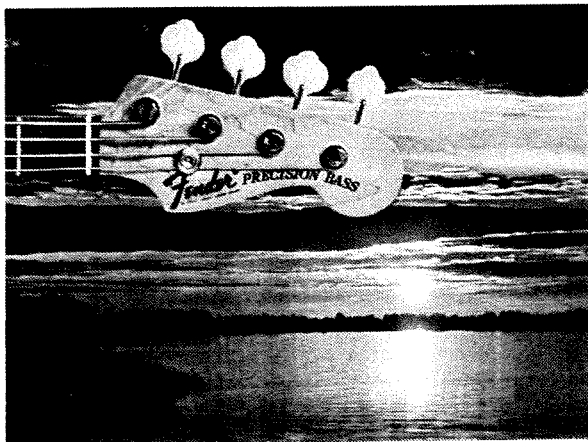

FENDER ELECTRIC STRINGS


They finger beautifully with consistent tonal quality and long life expectancy. Plus they are designed to match perfectly with Fender Guitars and Bases.



CASE


Available for the Stratocaster electric guitar. Covered with durable scuff-resistant vinyl and single-stitched. Accessory compartment is provided.

BASS AMPLIFIERS

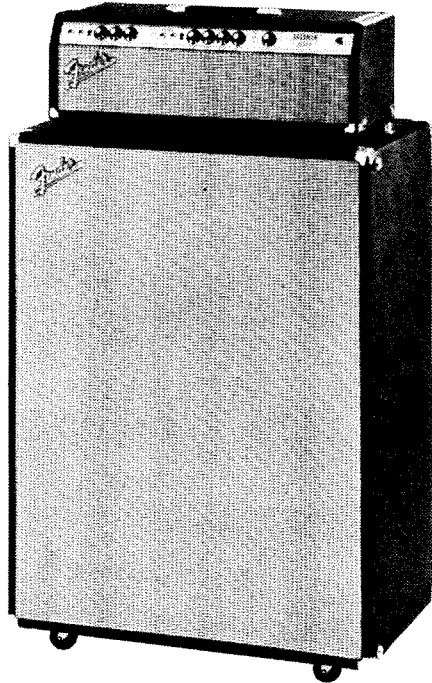

BASSMAN 135

- 135-watts RMS power with 297-watts peak music power.
- Four specially designed 12 inch speakers.

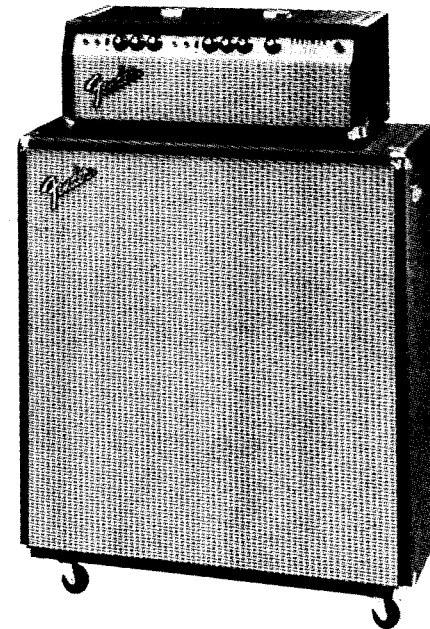

BASSMAN 70

- 70-watts RMS power with 154-watts peak music power for strong, positive amplification.
- Two heavy-duty 15" speakers mounted in specially designed enclosure for true tone reproduction.

IMPORTANT

See accompanying warranty card folder

Litho U.S.A.

Fender[®]
Made in U.S.A.

P.O. BOX 4137 - 1300 E. VALENCIA DRIVE, FULLERTON, CA 92634