


DB25b Direct Box



SCHEMATIC

DB25 Direct Box

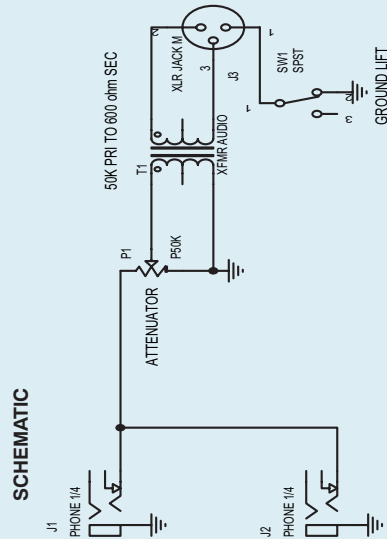

FOR WARRANTY
INFORMATION, SEE
OUR WEBSITE;
WWW.ROLLS.COM

ROLLS

INTRODUCTION

Thank you for your purchase of the DB 25b, a passive direct box designed to take high impedance signals and convert them to low impedance. The unit features an Attenuator volume control for the input signal, and a Ground Lift switch which may reduce unwanted hum caused by "ground loops".

DESCRIPTION

Input Jacks: 1/4" unbalanced jacks for receiving line or instrument level signals.
Attenuator: Reduces the input signal by the amount indicated.
Ground Lift Switch: In the "Lift" position, the ground connection of the XLR jack is disconnected from the chassis.
Output Jack: XLR balanced jack for connection to a mixing board or other balanced input device.

SPECIFICATIONS

Frequency Response: 20 - 20kHz +/- 3 dB
 Output Impedance: 600 Ohms
 Input Impedance: 50K Ohms
 Max Output Level: +4 dBm

Rolls Corporation
Salt Lake City, UT
02/08

