



SGI® OpenGL Multipipe™ SDK Programmer's Guide

Version 3.2

007-4527-004



CONTRIBUTORS

Written by Ken Jones

Illustrated by Chrystie Danzer

Engineering contributions by Patrick Bouchaud, Davy Courvoisier, Stefan Eilemann, Philippe Robert, and Vaibhav Saxena

COPYRIGHT

© 2002–2005 Silicon Graphics, Inc. All rights reserved; provided portions may be copyright in third parties, as indicated elsewhere herein. No permission is granted to copy, distribute, or create derivative works from the contents of this electronic documentation in any manner, in whole or in part, without the prior written permission of Silicon Graphics, Inc.

LIMITED RIGHTS LEGEND

The software described in this document is "commercial computer software" provided with restricted rights (except as to included open/free source) as specified in the FAR 52.227-19 and/or the DFAR 227.7202, or successive sections. Use beyond license provisions is a violation of worldwide intellectual property laws, treaties and conventions. This document is provided with limited rights as defined in 52.227-14.

TRADEMARKS AND ATTRIBUTIONS

Silicon Graphics, SGI, the SGI logo, OpenGL, and Reality Center are registered trademarks and GLX, Open Inventor, the OpenGL logo, OpenGL Multipipe, OpenGL Volumizer, SGI ProPack, and Silicon Graphics Prism are trademarks of Silicon Graphics, Inc., in the United States and/or other countries worldwide.

FireGL is a trademark and ATI is a registered trademark of ATI Technologies, Inc. HOLOBENCH and TANORAMA are registered trademarks of Helmut Tan. Linux is a registered trademark of Linus Torvalds. Motif and the X device are registered trademarks of The Open Group in the United States and other countries. Red Hat and all Red Hat-based trademarks are trademarks or registered trademarks of Red Hat, Inc. in the United States and other countries. SUSE is a trademark of SUSE LINUX Products GmbH, a Novell business.

New Features in This Release

This guide documents OpenGL Multipipe SDK 3.1 and 3.2, which include the following features:

- Support for Silicon Graphics Prism visualization systems (release 3.1.1)
- Performance enhancements for Silicon Graphics Prism visualization systems (release 3.2)
- Support for 32-bit Linux platforms (release 3.2)
- Miscellaneous bugfixes

Record of Revision

| Version | Description |
|----------------|---|
| 001 | October 2002 Original publication. Supports the 2.1 release of OpenGL Multipipe SDK. |
| 002 | June 2003 Revised to support the 3.0 release of OpenGL Multipipe SDK. |
| 003 | September 2003 Revised to support the 3.0.1 release of OpenGL Multipipe SDK. |
| 004 | July 2005 Updated to support the 3.1 and 3.2 releases of OpenGL Multipipe SDK. |

Contents

| | |
|--|----------|
| Figures | xi |
| Tables | xiii |
| Audience | xv |
| Related Publications | xv |
| Obtaining Publications | xvi |
| Conventions | xvi |
| Reader Comments | xvii |
| 1. Overview | 1 |
| A Reality Center Facility | 1 |
| What MPK Provides | 3 |
| Run-Time Configurability | 3 |
| Run-Time Scalability | 4 |
| Integrated Support for Scalable Graphics Hardware | 4 |
| Integrated Support for Stereo and Immersive Environments | 4 |
| Components of MPK | 5 |
| Supported Platforms | 5 |
| 32-Bit Linux Platforms | 5 |
| 64-Bit Linux Platforms | 6 |
| Application Structure | 6 |
| A Sample Configuration File | 7 |
| 2. The MPK Programming Model | 9 |
| MPK Naming Conventions | 9 |
| MPK Data Structure Names | 10 |
| MPK Function Names | 10 |
| MPK Attribute Names | 11 |

| | |
|---|-------------|
| MPK Data Structures | . 11 |
| The MPK Configuration Hierarchy | . 12 |
| The MPKConfig Data Structure | . 15 |
| The MPKPipe Data Structure. | . 15 |
| The MPKWindow Data Structure | . 16 |
| The MPKChannel Data Structure | . 16 |
| The MPKCompound Data Structure | . 16 |
| The MPKEvent Data Structure | . 17 |
| The MPKGlobal Data Structure | . 17 |
| The MPKFrame and MPKImage Data Structures | . 17 |
| The MPKArena Interface | . 17 |
| A Non-MPK Application Versus an MPK Application | . 18 |
| A Simple MPK Application | . 21 |
| Creating and Initializing a Configuration | . 21 |
| The Main Loop. | . 26 |
| The Rendering Callbacks | . 28 |
| Event Processing | . 33 |
| A Graceful Exit. | . 37 |
| Example Code | . 39 |
| 3. Using Compounds. | . 51 |
| Scalable Rendering | . 51 |

| | |
|--|-------------|
| Building Compounds | 52 |
| Frame Decomposition | 54 |
| Screen Decomposition | 55 |
| Database Decomposition | 58 |
| Eye Decomposition | 62 |
| Temporal Decomposition | 66 |
| Frame Multiplexing | 66 |
| Data Streaming | 70 |
| Pixel-Based Decomposition | 74 |
| Full-Scene Antialiasing (FSAA) Decomposition | 74 |
| FSAA Compound Examples | 74 |
| Cull Decomposition | 76 |
| Multilevel Decomposition | 78 |
| Stereo-Selective Compounds | 81 |
| Automatic Load Balancing for Compounds | 82 |
| Dynamic and Static Load Balancing | 82 |
| Proper Environment for Automatic Load Balancing | 83 |
| How to Enable Automatic Load Balancing | 84 |
| Using a Split-Axis Method for Tiling | 84 |
| Choosing the Right Decomposition Mode | 87 |
| Compound-Specific Callbacks | 88 |
| Optimizing Frame Transport | 88 |
| Custom Assembly | 89 |
| Traversing Compounds | 92 |
| 4. Culling | 95 |
| Configuring | 95 |
| Data Handling | 98 |
| 5. Advanced MPK Programming | .103 |
| Using an Alternate Parser | .103 |
| Creating Configurations without a Configuration File | .103 |
| The Idle Callback | .105 |
| Controlling the Frame Rate | .105 |

| | |
|-------------------------------------|------------|
| Data Handling | 106 |
| Application-Only Data | 106 |
| Static Shared Data | 107 |
| Dynamic Shared Data | 107 |
| Frame Data | 107 |
| Hardware Compositing | 107 |
| Advanced Compositing | 108 |
| MPK and Other APIs | 113 |
| OpenGL Volumizer 2 | 113 |
| Execution Modes | 113 |
| Rendering | 114 |
| Scalability | 114 |
| Open Inventor | 115 |
| Motif | 116 |
| Non-Thread-Safe Libraries | 116 |
| A. MPK Attributes | 117 |
| MPK Attribute Names | 117 |
| Managing Attributes | 118 |
| MPKPipe Attributes | 119 |
| MPKWindow Attributes | 121 |
| MPKChannel Attributes | 125 |
| MPKGlobal Attributes | 127 |
| Index. | 131 |

Figures

| | | |
|--------------------|---|----|
| Figure 1-1 | SGI Reality Center | 2 |
| Figure 1-2 | MPK Application Structure | 6 |
| Figure 2-1 | MPK Configuration Hierarchy | 13 |
| Figure 2-2 | A Typical OpenGL Program | 18 |
| Figure 2-3 | MPK Execution Framework | 20 |
| Figure 2-4 | A Simplified <code>mpkConfigFrame()</code> Call | 29 |
| Figure 2-5 | MPK_ORTHO_STILL and MPK_ORTHO_TRACKED Frusta | 33 |
| Figure 3-1 | Source and Destination Channels | 52 |
| Figure 3-2 | Screen Decomposition | 55 |
| Figure 3-3 | The Execution of a 2D Compound | 57 |
| Figure 3-4 | The Execution of a 2D ASYNC Compound | 58 |
| Figure 3-5 | Database Decomposition | 59 |
| Figure 3-6 | The Execution of a DB Compound | 61 |
| Figure 3-7 | The Execution of a DB ASYNC Compound | 62 |
| Figure 3-8 | Eye Decomposition. | 63 |
| Figure 3-9 | The Execution of an EYE or HMD Compound | 65 |
| Figure 3-10 | The Execution of an EYE or HMD ASYNC Compound | 66 |
| Figure 3-11 | Frame Multiplexing Decomposition | 67 |
| Figure 3-12 | The Execution of a DPLEX Compound | 69 |
| Figure 3-13 | The Execution of a DPLEX ASYNC Compound | 70 |
| Figure 3-14 | Data Streaming Decomposition | 71 |
| Figure 3-15 | The Execution of a 3D Compound | 73 |
| Figure 3-16 | 4x FSAA Decomposition | 75 |
| Figure 3-17 | Eye-DB Multilevel Decomposition | 79 |
| Figure 3-18 | Dynamic Versus Static Load Balancing | 83 |
| Figure 3-19 | 2D Tiling Scheme with Four Regions and Horizontal Tiles | 85 |
| Figure 3-20 | 2D Tiling Scheme with Four Regions and Vertical Tiles | 86 |

| | | |
|--------------------|---|-----|
| Figure 3-21 | A Detailed Window Update | .90 |
| Figure 3-22 | MPKCompound Traversal | .93 |
| Figure 4-1 | Compound Tree for a 2D Decomposition | .96 |
| Figure 4-2 | Compound Tree for 2D Decomposition with Parallel Culling | .96 |
| Figure 4-3 | Compound Tree for 2D Decomposition and Multilevel Culling | .97 |
| Figure 4-4 | Multiple Cull Threads for a Single Channel | .98 |
| Figure 5-1 | A Frame and an Image within one Channel | 110 |

Tables

| | | |
|------------------|---|------|
| Table A-1 | Attribute-Managing Functions for Individual Data Structures | .118 |
| Table A-2 | MPKPipe Attributes | .120 |
| Table A-3 | MPKWindow Attributes | .121 |
| Table A-4 | MPKChannel Attributes | .126 |
| Table A-5 | MPK Global Attributes | .128 |

About This Guide

This guide describes OpenGL Multipipe SDK (MPK), which is a software development toolkit (SDK) that allows you to adapt your graphics applications to run in immersive environments and to take advantage of the scalability provided by multiple pipes and other scalable graphics hardware.

Audience

This guide targets application programmers. It describes how application programmers can adapt OpenGL graphics applications to fit the MPK programming model. The manual *SGI OpenGL Multipipe SDK User's Guide* targets Reality Center administrators, who configure graphics applications to run in multipipe environments.

Related Publications

The following books might be helpful:

- *SGI OpenGL Multipipe SDK User's Guide*
- *SGI OpenGL Multipipe SDK Programmer's Reference Pages*
- *SGI Scalable Graphics Compositor User's Guide*
- *SGI ProPack for Linux Start Here*
- Neider, Jackie, Tom Davis, and Mason Woo, *OpenGL Programming Guide*. Reading, Mass.: Addison-Wesley Publishing Company, Inc., 1993. A comprehensive guide to learning OpenGL.
- Nye, Adrian, *Volume One: Xlib Programming Manual*. Sebastopol, California: O'Reilly & Associates, Inc., 1991.

Obtaining Publications

You can obtain SGI documentation in the following ways:

- See the SGI Technical Publications Library at <http://docs.sgi.com>. Various formats are available. This library contains the most recent and most comprehensive set of online books, release notes, man pages, and other information.
- You can also view man pages by typing `man <title>` on a command line.

Conventions

The following conventions are used throughout this publication:

| Convention | Meaning |
|-------------------------|--|
| <code>command</code> | This fixed-space font denotes literal items such as commands, files, routines, path names, signals, messages, and programming language structures. |
| <i>variable</i> | Italic typeface denotes variable entries and words or concepts being defined. |
| user input | This fixed-space font denotes literal items that the user enters in interactive sessions. (Output is shown in nonbold, fixed-space font.) |
| function | Functions are denoted in bold with following parentheses. |
| <code>manpage(x)</code> | Man page section identifiers appear in parentheses after man page names. |

Reader Comments

If you have comments about the technical accuracy, content, or organization of this document, contact SGI. Be sure to include the title and document number of the manual with your comments. (Online, the document number is located in the front matter of the manual. In printed manuals, the document number is located at the bottom of each page.)

You can contact SGI in any of the following ways:

- Send e-mail to the following address:
techpubs@sgi.com
- Use the Feedback option on the Technical Publications Library webpage:
<http://docs.sgi.com>
- Contact your customer service representative and ask that an incident be filed in the SGI incident tracking system.
- Send mail to the following address:
Technical Publications
SGI
1500 Crittenden Lane, M/S 535
Mountain View, CA 94043-1351

SGI values your comments and will respond to them promptly.

Overview

This overview of OpenGL Multipipe SDK (MPK) consists of the following sections:

- “A Reality Center Facility”
- “What MPK Provides”
- “Components of MPK”
- “Application Structure”
- “A Sample Configuration File”

A Reality Center Facility

Throughout this document, we shall use the term Reality Center facility to convey the following meaning: an SGI computer environment with extended visualization capabilities. Note that this definition not only applies to the traditional three-pipe theater (historically set up for flight simulation) but covers as well all kinds of immersive environments (such as a Cave, TANORAMA POWERWALL, or TAN HOLOBENCH facility). Figure 1-1 on page 2 illustrates an SGI Reality Center facility.



Figure 1-1 SGI Reality Center

What MPK Provides

As more and more graphics applications come into the virtual reality arena as a piece of immersive solutions, application developers face new requirements. Not only do developers need to take into account high frame rates and low latencies needed for temporal realism, but also better image quality for visual realism. OpenGL applications must improve their performances and must be able to run in increasingly complex environments that include various input peripherals and projection systems. For applications initially designed to run on a visual workstation in non-real time and with keyboard-mouse input, new releases now need to be time-accurate and should be able to integrate a moving frustum tied to head-tracking peripherals and several rendering engines (graphics pipes) that provide multiple and wider fields of view. Because these types of evolving environments have numerous parameters, the applications must be sufficiently flexible and robust to accommodate their demands.

MPK is an application programming interface (API) designed to help software developers meet the demands of these new immersive environments. This product enables the application to take advantage of the scalability provided by additional pipes and other scalable graphics hardware, as well as to support immersive environments. MPK provides the following specific features:

- Run-time configurability
- Run-time scalability
- Integrated support for scalable graphics hardware
- Integrated support for stereo and immersive environments

Run-Time Configurability

MPK allows developers to create applications that run on multiple platforms ranging from simple visual workstations to large and complex visualization environments, often based on several pipes for parallel rendering purposes. It implements a design that largely isolates the application from the graphics resources and the physical environment. Providing run-time configurability, an application written in the MPK programming model can run on a simple desktop platform or, without any modification or recompilation, in highly complex visualization environments like an SGI Reality Center facility.

Run-Time Scalability

Graphics-intensive applications often require several pipes in order to achieve a desired performance. Each pipe contributes to a part of the final rendering. This introduces the need for a decomposition paradigm and the issue of how the rendering performance scales with the number of pipes. Rendering in parallel requires the developer to manage several graphic contexts and then to create tasks or threads, each managing their own graphic context and sharing the scene to be rendered. MPK allows a multipipe applications developer to avoid dealing with such parallel programming paradigms and offers compound algorithms based on several decomposition types.

Integrated Support for Scalable Graphics Hardware

Scalable graphics hardware such as the SGI Scalable Graphics Compositor can perform some of the compositing functions that MPK now provides in software. MPK supports such hardware as well as conventional graphics hardware.

Integrated Support for Stereo and Immersive Environments

Along with its scalability features, MPK has integrated the ability to exploit the stereo features of your application-display environment without recompilation. Having the related display characteristics of your environment described in a configuration file, you can specify at run time whether to run in stereo or mono.

In addition, MPK provides the application with the ability to support truly immersive environments by using a simple programming interface: the application only needs to provide real-world information about the position and orientation of the viewer. MPK then transparently adapts its left- and right-eye frustum computations to the actual user's location.

The ease of configuring your application to accommodate different hardware resources (graphics pipes and head-tracking devices) and different display areas makes MPK ideal for use in immersive environments.

Components of MPK

MPK has two components:

- Application programming interface

Designed for the applications programmer to adapt OpenGL graphics applications to fit the MPK programming model in order to support multipipe environments.

- Configuration file interface

Designed for Reality Center administrators to configure MPK graphics applications to run in their environments. This ASCII file interface allows you to specify how the framebuffer resources (pipes, windows, and channels) are mapped onto the physical projection areas (walls) and the parallel decomposition schemes (compounds) to be used by your applications.

MPK is available through C language function calls. It is designed as a thin layer on top of the operating system, X11, OpenGL, and GLX.

Supported Platforms

OpenGL Multipipe SDK is supported on following platforms:

- 32-bit Linux platforms
- 64-bit Linux platforms

32-Bit Linux Platforms

OpenGL Multipipe SDK supports following 32-bit Linux platforms:

- SUSE LINUX 9.1 or later
- Redhat Enterprise Linux (RHEL) 3 or later

64-Bit Linux Platforms

OpenGL Multipipe SDK supports Silicon Graphics Prism platforms with SGI Propack 3 Service Pack 3 or later.

Like GLUT, OpenGL Multipipe SDK does not have any strict graphics hardware requirements but graphics acceleration might be needed for any performance improvement or if the application requires it. Silicon Graphics Prism systems have ATI FireGL series graphics subsystems.

Application Structure

As an application will have to run in different configurations, MPK externalizes the configuration management by implementing an ASCII file that is separate from the other application code. The scene management and data workflow is separate from scene rendering (management of the graphics resources). Figure 1-2 illustrates the structure of an application based on MPK.

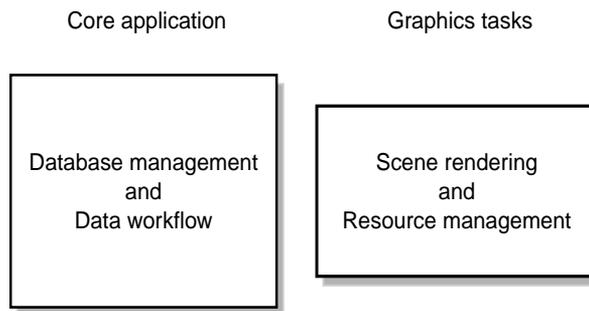


Figure 1-2 MPK Application Structure

A Sample Configuration File

Example 1-1 shows a one-pipe, one-window configuration file that can be used in conjunction with a MPK-structured program—for instance, `volview`, a scalable volume-viewer application packaged as part of the OpenGL Volumizer 2 product.

Example 1-1 Sample Configuration File

```
global {
    MPK_WATTR_PLANES_ALPHA 1
    MPK_DEFAULT_EYE_OFFSET 0.01
}
config {
    name    "Volview: 1-pipe"
    mode    mono

    mono    "setmon -n 1280x1024_76"
    stereo  "setmon -n str_top"
    pipe {
        window {
            viewport    [ 0, 0, 1.0, 1.0 ]
            channel {
                name            "center"
                viewport        [ 0., 0., 1., 1. ]
                wall {
                    bottom_left  [ -.5, -.5, -1 ]
                    bottom_right [  .5, -.5, -1 ]
                    top_left     [ -.5,  .5, -1 ]
                }
            }
        }
    }
}
```


The MPK Programming Model

This chapter describes the program structure and execution model of an OpenGL Multipipe SDK (MPK) program and compares this model with that of a conventional OpenGL program. It includes a walkthrough of a simple MPK application. This chapter has the following sections:

- “MPK Naming Conventions”
- “MPK Data Structures”
- “A Non-MPK Application Versus an MPK Application”
- “A Simple MPK Application”

MPK Naming Conventions

In large part, MPK follows the OpenGL naming conventions for its programming constructs. The primary MPK constructs are its data structures. Most of these data structures correspond to the graphics elements you will manage:

- Configuration (usually abbreviated to “Config” in names)
- Pipe
- Window
- Channel
- Compound (a decomposition mode)

This section describes how the data structures are named as well as the naming conventions for related functions and data constants.

MPK Data Structure Names

MPK uses a composite form for its data structure names: the MPK prefix plus the data structure type. MPK has the following user-accessible data structures:

- MPKConfig
- MPKPipe
- MPKWindow
- MPKChannel
- MPKCompound
- MPKEvent
- MPKFrame
- MPKGlobal (used to specify global default attributes)
- MPKImage

MPK Function Names

Generally, MPK function names have three parts:

1. mpk prefix
2. Data structure type
3. Action

The following are examples:

```
mpkWindowDelete()  
mpkChannelApplyBuffer()  
mpkCompoundGetRange()
```

There are special function names associated with MPKGlobal data structures. The section “MPKGlobal Attributes” in Appendix A describes the naming of these functions.

MPK Attribute Names

Like MPK data structure names and function names, MPK attribute names are composite names with an MPK prefix, but unlike the data structure and function names, attribute names use the underscore character (`_`) to separate the parts and the attribute names use all capital letters.

MPK attribute names have three or more parts, the first two of which are the following:

1. MPK prefix
2. Attribute type

| | |
|----------------------|---|
| <code>CATTR</code> | Specifies a channel attribute. |
| <code>PATTR</code> | Specifies a pipe attribute. |
| <code>WATTR</code> | Specifies a window attribute. |
| <code>DEFAULT</code> | Used only in the case of the stereo-related attribute <code>MPK_DEFAULT_EYE_OFFSET</code> . |

The remaining parts contain additional attribute descriptors. The following are examples of attribute names:

```
MPK_CATTR_FAR
MPK_PATTR_STEREO_WIDTH
MPK_WATTR_HINTS_RGBA
```

MPK Data Structures

MPK encapsulates the graphics resources and rendering options in data structures. This section describes the hierarchy and function of these data structures as well as the special data structures `MPKEvent`, `MPKFrame`, `MPKGlobal`, and `MPKImage` and the interface `MPKArena`. The following subsections comprise this section:

- “The MPK Configuration Hierarchy”
- “The MPKConfig Data Structure”
- “The MPKPipe Data Structure”
- “The MPKWindow Data Structure”
- “The MPKChannel Data Structure”

- “The MPKCompound Data Structure”
- “The MPKEvent Data Structure”
- “The MPKGlobal Data Structure”
- “The MPKFrame and MPKImage Data Structures”
- “The MPKArena Interface”

The MPK Configuration Hierarchy

MPK uses a hierarchical tree to describe the configuration. The top-level data structure, the MPKConfig data structure, holds children of type MPKPipe. The MPKPipe data structure holds children of type MPKWindow, which hold children of type MPKChannel. As such, you can take advantage of the attendant inheritance. For instance, you can specify the screen dimensions at the MPKPipe level and they will be inherited by the child windows and child channels. This inheritance is made possible because MPK uses no absolute pixel dimensions but fractional viewport descriptions for its window and channels.

Figure 2-1 illustrates one possible configuration using two pipes, two windows, and four channels to render four different views. Example 2-1 illustrates the skeleton of the corresponding configuration file, which can be read using `mpkConfigLoad()`.

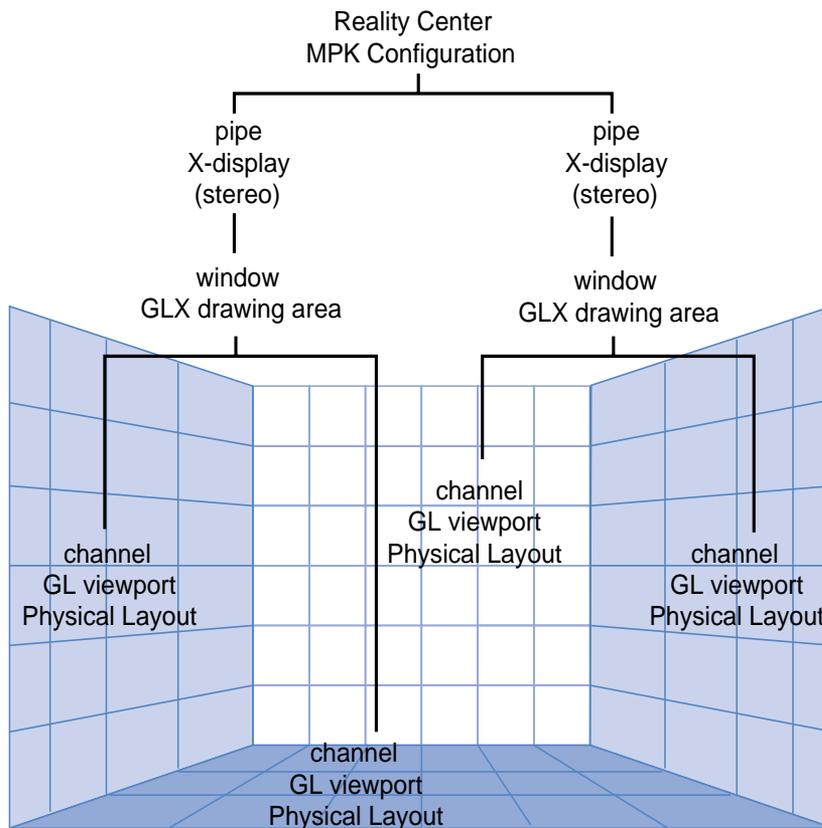


Figure 2-1 MPK Configuration Hierarchy

Example 2-1 MPK Data Structures in a Configuration File

```
config {
  pipe {
    window {
      viewport [ parameters1 ]
      channel {
        viewport [ parameters2 ]
        .
        .
      }
      channel {
        viewport [ parameters3 ]
        .
        .
      }
    }
  }
  pipe {
    window {
      viewport [ parameters4 ]
      channel {
        viewport [ parameters5 ]
        .
        .
      }
      channel {
        viewport [ parameters6 ]
        .
        .
      }
    }
  }
}
```


Reading this configuration file, MPK determines the following:

- What physical pipes it must allocate
- What parallel tasks it must create
- How to synchronize the rendering tasks
- The final rendering framebuffer area

The following sections describe the function of each data structure.

The MPKConfig Data Structure

The MPKConfig data structure primarily describes the rendering resources of an MPK application as a hierarchy of the following:

- Hardware rendering pipelines (MPKPipes)
- GLX software rendering threads (MPKWindows)
- OpenGL framebuffer rendering areas (MPKChannels)

It may also describe MPKCompounds, various parallelization schemes of the rendering across channels in order to scale performances.

You can read the MPKConfig data structure from an ASCII file using **mpkConfigLoad()** and launch the MPKConfig using **mpkConfigInit()**. Rendering threads are then spawned and the MPKConfig initialization callbacks are invoked. These should in turn specify the rendering callbacks that will be triggered by **mpkConfigFrame()**.

The MPKPipe Data Structure

The MPKPipe data structure describes the rendering resources within an MPKConfig that are assigned to a given hardware rendering pipe. The pipe itself is characterized by the name of its corresponding X11 display as well as the expected mono and stereo mechanisms (full-screen, quad-buffer, and so on) to be applied by its rendering threads (MPKWindows).

You can specify the display sizes corresponding to the various stereo modes using MPKGlobal attributes; otherwise, MPK uses the values returned by

`DisplayWidth(3X11)` and `DisplayHeight(3X11)`. Appendix A, “MPK Attributes” describes the `MPKGlobal` attributes.

The MPKWindow Data Structure

An `MPKWindow` data structure corresponds to a single GLX unit. A GLX unit is a single X window, pixel buffer (pbuffer), or X pixmap with its associated OpenGL visual and context. Essential in the MPK programming model is that each `MPKWindow` spawns its own rendering thread. MPK also supports nonthreaded windows, which are updated sequentially from the application thread.

The MPKChannel Data Structure

An `MPKChannel` data structure is essentially a view onto a scene and corresponds to a single viewport inside its parent `MPKWindow`. See the man page `glViewport(3G)` for information on viewports. In addition to the viewport description, an `MPKChannel` also contains the modeling coordinates for the projection rectangle in the real world.

The MPKCompound Data Structure

To achieve greater application performance, the `MPKCompound` data structure is used to describe a decomposition scheme as well as the recomposition by distributing the rendering workload across several graphics pipes.

It is essentially a container for children of type `MPKCompound`, each associated with an existing `MPKChannel` data structure. The rendering of the topmost `MPKChannel` in the hierarchy will be parallelized among the child channels by one or more of the following decomposition schemes:

- Portions of the destination viewport (mode `2D`)
- Portions of the frame data (mode `DB`)
- Stereo eye pass (mode `EYE` or `HMD`)
- Pipelined rendering cycles (mode `DPLEX` or `3D`)
- Image quality (mode `FSAA`, pixel-based)
- Parallelized culling and drawing (mode `CULL`)

Chapter 3, “Using Compounds” describes in detail the decomposition schemes.

The MPKEvent Data Structure

The MPKEvent data structure encapsulates an X11 event. It provides convenience functions to decode the data in the corresponding XEvent. Note that the MPKEvent is freed automatically by MPK. Hence, the pointer to an MPKEvent should not be stored within the application.

The MPKGlobal Data Structure

The MPKGlobal data structure specifies MPK default attribute values. It handles general default values—such as the execution mode, shared arena attributes, and the timer signal—as well as default attributes for the MPKPipe, MPKWindow, and MPKChannel data structures. These entities retrieve their default values during creation.

Appendix A, “MPK Attributes” describes the MPKGlobal attributes.

The MPKFrame and MPKImage Data Structures

The MPKFrame and MPKImage data structures provide access to the transported color, depth, and stencil values during compound assembly. The section “Advanced Compositing” in Chapter 5 explains this API.

The MPKArena Interface

MPK provides a simple memory allocation interface that enables applications to allocate data regardless of their current execution mode. Any data that is shared between the rendering threads and the application thread should be allocated using **mpkMalloc()** or **mpkRealloc()**.

Internally, MPK may use a shared arena (see the `usinit(3P)` man page) to allocate memory. The default parameters of this arena can be changed using the MPKGlobal interface.

A Non-MPK Application Versus an MPK Application

The typical OpenGL application, as shown in Figure 2-2, is a single-threaded application with a main rendering loop. Within that loop it updates the scene database, draws a new frame, and processes user input. This application is constrained to single-window output, as it is unable to scale the rendering across multiple pipes. In theory, it is still possible to update several windows sequentially. However, this leads to no scalability since the application is single-threaded with each update adding time to the total frame time.

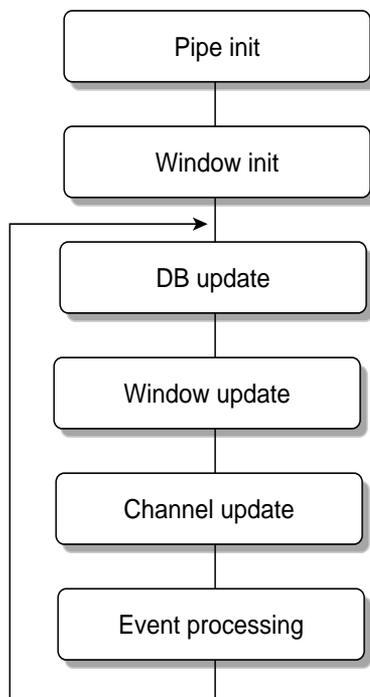


Figure 2-2 A Typical OpenGL Program

The evolution of an existing OpenGL application to a multithreaded, multipipe implementation requires application changes that are independent of the framework being used. The following steps describe the actions to be taken for this conversion:

1. Isolate scene graph manipulation and drawing.

This first step isolates the application's rendering operation from its data-manipulation operation. Then, multiple rendering operations can execute concurrently on the application data in a manner that the rendering and data-manipulation operations do not modify each other's variables. As a result, the rendering operation accesses the application data in a read-only mode and is limited to feeding the graphics pipeline. This separation requires a re-evaluation of the application's data structures for the channel-specific component. Therefore, you must consider the existing culling mechanisms. Although such mechanisms comprise an interface layer between channels and their associated views, they are typically specific to the application data or scene graph API. MPK ensures that its programming model does not infringe on any possible culling implementation.

2. Centralize events and data processing.

Data access can be controlled by protecting thread-sensitive data (using a mutex or locks) , by engineering an entire application around a central data server (APP), or by integrating both of these methods. Although event processing is just one aspect of this issue, it impacts the entire design process.

Introducing a thread-safe implementation, this approach reflects OpenGL's "natural" application framework.

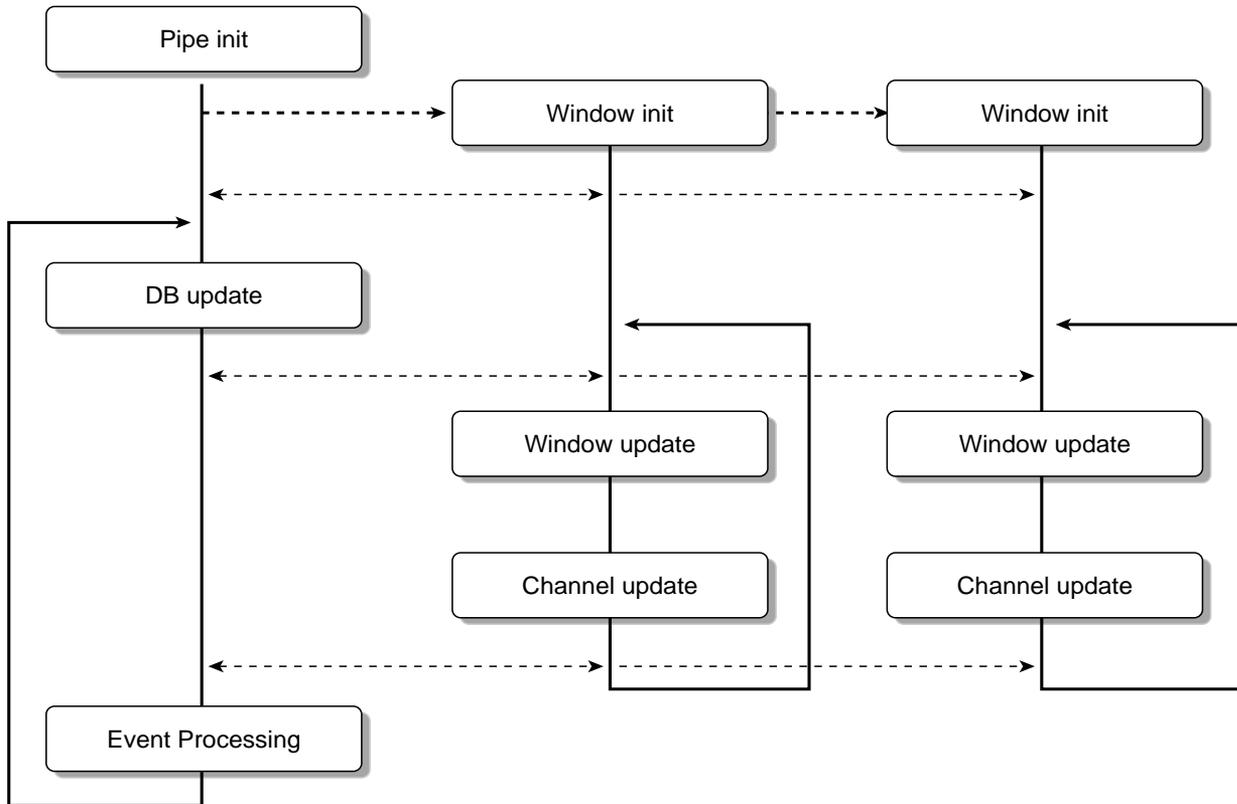


Figure 2-3 MPK Execution Framework

Once you complete the first two conversion steps, it is just a small step to use MPK as an application framework. You only need to transpose the drawing-related functions into their MPK counterparts. Figure 2-3 illustrates the MPK execution model.

The restructured application is now capable of parallel execution to scale its performance, as described in the section “Run-Time Scalability” in Chapter 1. MPK takes care of all the necessary synchronization.

A Simple MPK Application

This section describes the components of a very simple MPK program in the following subsections:

- “Creating and Initializing a Configuration”
- “The Main Loop”
- “The Rendering Callbacks”
- “Event Processing”
- “A Graceful Exit”
- “Example Code”

All the code fragments used in the various subsections to explain the parts of an MPK program are put together in the last subsection “Example Code” to compose an executable example.

Creating and Initializing a Configuration

Example 2-2 shows the typical initialization sequence for a simple MPK program. Each of the MPK calls are described after the example.

Example 2-2 A Simple MPK Initialization Sequence

```
MPKConfig *config;

mpkGlobalSetExecutionMode( MPK_EXECUTION_PTHREAD );

mpkInit();

// shared must be allocated after mpkInit().
shared = mpkMalloc( sizeof( Shared ) );
initSharedData( shared );

if ( argc < 2 )
    config = mpkConfigLoad( "../configs/1-window" );
else
    config = mpkConfigLoad( argv[1] );

if ( config == NULL )
```

```
{
    fprintf(stderr, "Can't load config file.\n");
    exit (0);
}

mpkConfigOutput( config, 0 );

shared->stereo = ( mpkConfigGetMode(config) == MPK_STEREO ? 1 : 0 );

mpkConfigSetWindowInitCB( config, initWindow );
mpkConfigSetWindowExitCB( config, NULL );
mpkConfigSetChannelInitCB( config, initChannel );
mpkConfigSetDataFreeCB( config, freeFrameData );

mpkConfigInit( config, 0 );
```

The function **mpkGlobalSetExecutionMode()** selects the threading model used by this application. MPK supports `pthread` or `fork` execution modes. Since the execution mode has to be known before initialization, it is set before **mpkInit()**. The default execution mode is `pthread`.

Calling **mpkInit()** initializes internal MPK data structures and the shared arena if necessary. This call has to be the first MPK call in an application, except for the following:

- **mpkGetString()**
- **mpkGlobalSetExecutionMode()**
- **mpkGlobalSetArenaAttribute()**
- **mpkGlobalSetArenaPath()**

The shared arena is used to allocate shared memory in `fork` execution mode as well as to create synchronization primitives in `fork` execution mode.

The next step for the application is to initialize its shared global data. Note that global data should always be located in a block of memory allocated by **mpkMalloc()** or **mpkCalloc()** to ensure the data is accessible by all threads. See “Data Handling” in Chapter 5 for more details.

After MPK and the application is initialized, an MPKConfig data structure is created. In this case, **mpkConfigLoad()** is used to read an ASCII configuration file into an MPKConfig structure. This could be done by other means—for example, by constructing an MPKConfig structure programmatically or by writing an alternate parser. See

Chapter 5, “Advanced MPK Programming” for a description of the alternative approaches. The function **mpkConfigOutput()** can be used to print the given MPKConfig in a format compatible with **mpkConfigLoad()**.

The stereo mode, as specified in the configuration file, is obtained using **mpkConfigGetMode()**. This value is later needed during the main loop and in the event callbacks.

Some MPKConfig callbacks have to be set in order to run this configuration properly. These are the window initialization and channel initialization callbacks as well as the data deallocation callback. The initialization callbacks are explained in the following paragraphs. The purpose of the free-data callback is explained in the section “The Main Loop” later in this chapter.

Finally, the configuration is initialized by calling **mpkConfigInit()**. For each data structure in the configuration hierarchy, the MPKConfig initialization callback is invoked.

From the application thread perspective, the initialization of the threaded windows consists of simply launching the window thread. The first thing that is invoked from the newly created window rendering thread is the MPKConfig’s window initialization callback and the initialization callbacks for all channels of this window.

Nonthreaded windows are initialized from the application thread sequentially. All threaded window and channel initialization callbacks are called from their respective window threads. Therefore, the window initialization and channel initialization happen in parallel. Any critical data access in the window or channel initialization callbacks has to be protected using mutual exclusion.

The default window initialization callback is **mpkWindowCreate()**. Most applications overwrite the default callback in order to do per-window initialization. Example 2-3 shows a simple window initialization callback.

Example 2-3 Simple Window Initialization Callbacks

```
void initWindow( MPKWindow *w )
{
    // MPKWindow initialization

    mpkWindowSetDrawCB(w,MPK_WINDOW_DRAWCB_INIT_X,initWindowX);
    mpkWindowSetDrawCB(w,MPK_WINDOW_DRAWCB_INIT_GL,initWindowGL);
    mpkWindowSetDrawCB(w,MPK_WINDOW_DRAWCB_EXIT_X,exitWindowX);
    mpkWindowSetDrawCB(w,MPK_WINDOW_DRAWCB_EXIT_GL,exitWindowGL);

    mpkWindowSetEventCB(w,MPK_WINDOW_EVENTCB_MOUSE,windowMouse);
    mpkWindowSetEventCB(w,MPK_WINDOW_EVENTCB_BUTTON,windowMouse);
    mpkWindowSetEventCB(w,MPK_WINDOW_EVENTCB_EXIT,windowExit);
    mpkWindowSetEventCB(w,MPK_WINDOW_EVENTCB_KEYBOARD,windowKeyboard);
}

void initWindowX( MPKWindow *w )
{
    // X11 initialization
    mpkWindowCreate( w );
}

void initWindowGL( MPKWindow *w )
{
    // create ctx
    mpkWindowCreateContext( w );
    mpkWindowMakeCurrent( w );

    // GL initialization
    mpkWindowApplyViewport( w );

    glDepthFunc( GL_LEQUAL );
    glEnable( GL_DEPTH_TEST );

    glEnable( GL_LIGHTING );
    glEnable( GL_LIGHT0 );
    glLightfv( GL_LIGHT0, GL_POSITION, lightpos );

    glColorMaterial( GL_FRONT_AND_BACK, GL_DIFFUSE );
    glEnable( GL_COLOR_MATERIAL );

    glClearDepth( 1. );
    glClearColor( 0., 0., 0., 1. );
}
```

```

    // clear both buffers
    glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT );
    mpkWindowSwapBuffers(w);
    glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT );
}

```

For window initialization, there are three stages:

- MPKWindow initialization
- X window initialization
- OpenGL initialization

During the MPKWindow initialization, all necessary event callbacks are set. The event callbacks are described in the later section “Event Processing”. The X initialization creates the window. The function **mpkWindowCreate()** performs the following operations:

```

mpkWindowOpenDisplay( window );

GLXFBConfig *fbconfig = mpkWindowChooseFBConfig( window, &n );
mpkWindowSetFBConfig( window, fbconfig[0] );

mpkWindowCreateDrawable( window );
mpkWindowMapDrawable( window );

```

The **initGL()** function creates an OpenGL context and initializes OpenGL. At the end of the OpenGL initialization callback, both draw buffers are cleared in order to avoid visual artifacts during the initial frames. The function **mpkWindowSwapBuffers()** should always be used instead of **glXSwapBuffers()**.

The channel initialization code, as shown in Example 2-4, is quite simple: it just sets this channel’s clear and update draw callbacks. The purpose of these callbacks is explained in the later section “The Rendering Callbacks”.

Example 2-4 A Sample Channel Initialization Callback

```

void initChannel( MPKChannel *c )
{
    mpkChannelSetDrawCB( c, MPK_CHANNEL_DRAWCB_CLEAR, clearChannel );
    mpkChannelSetDrawCB( c, MPK_CHANNEL_DRAWCB_UPDATE, updateChannel );
}

```

The Main Loop

The main rendering loop, as shown in Example 2-5, performs two basic operations: it updates the application's database based on user input and draws a new frame in an endless loop.

Example 2-5 The Main Rendering Loop

```
while (!shared->exit )
{
    // update DB
    incrementRotation( shared->rotation,
                      shared->xangle,
                      shared->yangle );

    shared->translation[0] += shared->dx;
    shared->translation[1] += shared->dy;
    shared->translation[2] += shared->dz;

    shared->dx = 0.;
    shared->dy = 0.;
    shared->dz = 0.;

    // new frame
    mpkConfigChangeMode( config, shared->stereo );
    framedata = newFrameData( shared );
    mpkConfigFrame( config, framedata );
}
```

The function **mpkConfigChangeMode()** changes the configuration stereo mode to the passed mode. If the new mode is the same as the old, then the change is ignored. Switching the stereo mode involves exiting and restarting the configuration if any of the windows that will use quad-buffered stereo does not have a stereo-capable visual. For that reason, if a configuration file uses quad-buffered stereo, the MPKGlobal attribute `MPK_WATTR_HINTS_STEREO` should be set to 1 in the global section of the configuration file.

Finally, a new frame is drawn by calling **mpkConfigFrame()**. MPK provides a transport mechanism for frame data to render latency-correct frames. For certain decompositions, as discussed in Chapter 3, “Using Compounds”, a channel draws an older frame than the current one. For that reason, frame-specific data—for example, the current translation of the scene—has to be managed through the MPK frame data mechanism. MPK keeps

track of older frame data and always passes the appropriate frame data to the rendering callbacks. In order to free old frame data, MPK calls the free-data callback for the MPKConfig structure. The MPK internal data structures are latency-aware. For example, a channel's viewport in a rendering callback will be computed according to the current latency.

Example 2-6 uses the functions **newFrameData()** and **freeFrameData()** to manage the application's frame data. A simple linked list is used to recycle old frame data structures, in order to avoid subsequent **mpkMalloc()** and **mpkFree()** calls for each frame. To generate a new frame data structure, **newFrameData()** gets a structure allocated using **mpkMalloc()** and fills in frame-dependent data from the application's database. In this example, this is the translation and rotation of the scene. The free-data callback inserts the old structure into a linked list to recycle it for new use by **newFrameData()**.

Example 2-6 The Frame Data-Handling Functions

```
FrameData *newFrameData( Shared *shared )
{
    FrameData *framedata;
    if ( frameDataBuffer == NULL )
    {
        framedata = (FrameData *) mpkMalloc( sizeof(FrameData) );
    }
    else
    {
        framedata = frameDataBuffer;
        frameDataBuffer = framedata->next;
    }

    framedata->next = NULL;

    memcpy( framedata->translation, shared->translation,
           3*sizeof(float) );
    memcpy( framedata->rotation, shared->rotation, 16*sizeof(float) );

    return framedata;
}

void freeFrameData( MPKConfig *cfg, void *data )
{
    FrameData *framedata = (FrameData *)data;
    framedata->next = frameDataBuffer;
    frameDataBuffer = framedata;
}
}
```

The Rendering Callbacks

This section explains what actually happens during a `mpkConfigFrame()` call: what callbacks are invoked, their invocation order, and how the rendering threads are synchronized. Figure 2-4, not taking compounds into account, shows a simplified diagram of the execution.

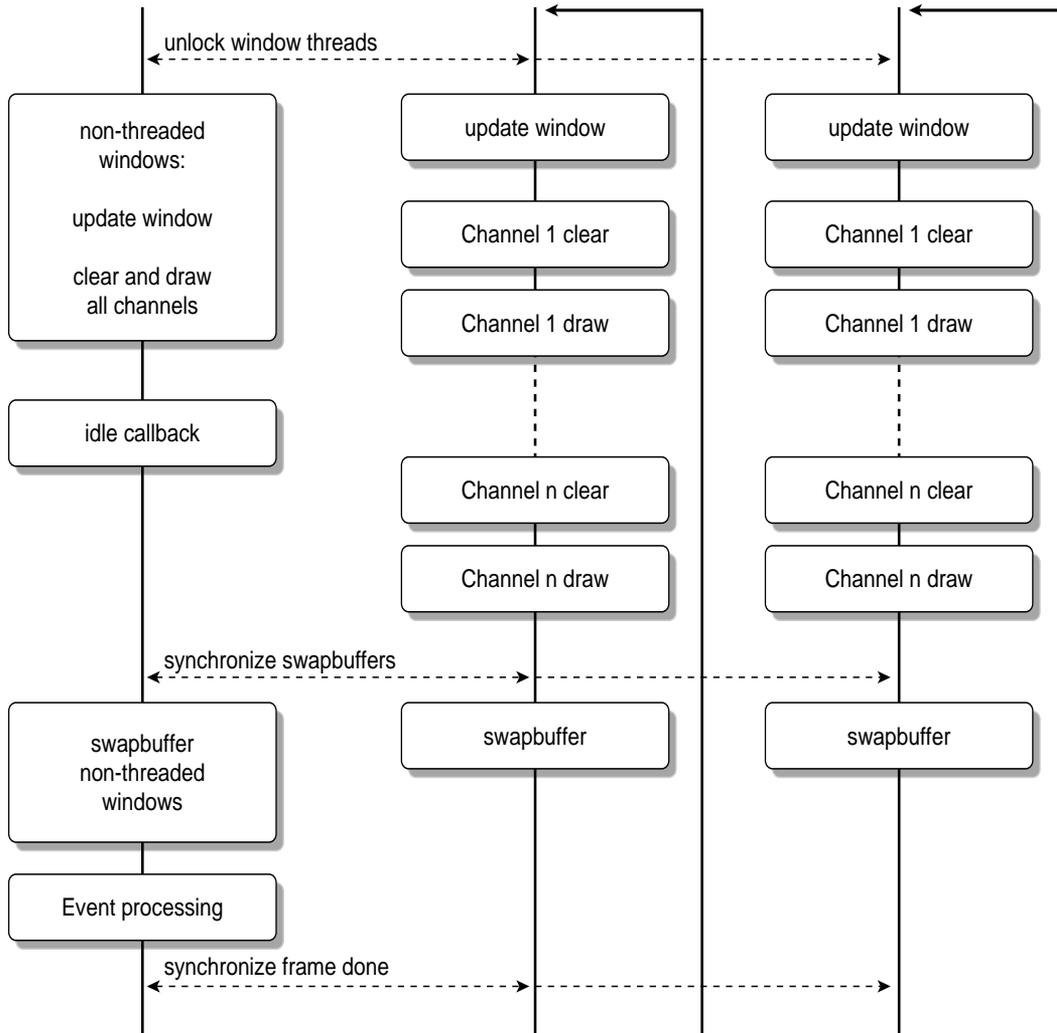


Figure 2-4 A Simplified `mpkConfigFrame()` Call

First, the function **mpkConfigFrame()** unlocks the rendering threads. This action invokes the update-window draw callback and then calls the update callbacks for each channel.

Usually, the application thread is idle while the window threads are drawing. Some applications may perform an intermittent task during this time—for example, to pipeline their culling—but the application must avoid modifying the data currently being used by the rendering processes. The MPKConfig idle callback serves this purpose.

The abstraction of the rendering from the main application enables an MPK application to transparently use stereo rendering. When running in stereo mode, MPK calls the update callbacks twice for each channel: once for the left eye and once for the right eye.

The update-window draw callback is called once at the beginning of each frame. Typically, this is the place to update the OpenGL context, for example, by creating new texture objects. This callback is not used in the example code in this section.

MPK, in contrast to other multipipe programming models, separates the update of a channel into two callbacks, clear and draw. The separation is necessary to do the recomposition during compound processing, as explained in Chapter 3, “Using Compounds”.

A simple clear callback is shown in Example 2-7.

Example 2-7 A Channel Clear Callback

```
void clearChannel( MPKChannel *c, void *data )
{
    mpkChannelApplyBuffer( c );
    mpkChannelApplyViewport( c );

    glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT );
}
```

The purpose of the clear callback is to set up the current channel and clear its OpenGL framebuffer as needed. The function **mpkChannelApplyBuffer()** sets the correct OpenGL read and draw buffers (see the `glReadBuffer(3G)` and `glDrawBuffer(3G)` man pages) according to the current stereo mode and eye pass.

The function **mpkChannelApplyViewport()** applies the current OpenGL viewport and scissor area (see the `glViewport(3G)` and `glScissor(3G)` man pages). The channel’s

pixel viewport is computed from the parent window's pixel viewport (that is, its width and height) and the channel's fractional viewport using the following formula:

```
#define IRND(a) ((int)((a)+.5))

// compute first pixel position of the channel
channel.pvp[0] = IRND(channel.vp[0] * window.pvp[2]);
channel.pvp[1] = IRND(channel.vp[1] * window.pvp[3]);

// compute last pixel position of the channel
channel.pvp[2] = IRND((channel.vp[0]+channel.vp[2]) * window.pvp[2]);
channel.pvp[3] = IRND((channel.vp[1]+channel.vp[3]) * window.pvp[3]);

// compute channel's dimension
channel.pvp[2] -= channel.pvp[0];
channel.pvp[3] -= channel.pvp[1];
```

This method honors positions over dimensions in order to ensure adjacency whenever possible—for example, in a 1280x1024 window:

```
vp(1): [0.      0. 0.3333 1. ]    pvp(1): [0  0 427 1024]
vp(2): [0.3333 0. 0.3333 1. ]    pvp(2): [427 0 426 1024]
```

Note that in full-screen stereo mode (type `rect`) during the left eye pass, the value of the MPKGlobal variable `MPK_PATTR_STEREO_OFFSET` will be added to `channel.pvp[1]`.

Example 2-8 shows a simple update-channel draw callback. The purpose of the draw callback is to render a new frame based on the current frustum and frame data for this channel.

Example 2-8 A Channel Draw Callback

```
void updateChannel( MPKChannel *c, void *data )
{
    FrameData *framedata = (FrameData *)data;

    glMatrixMode( GL_PROJECTION );
    glLoadIdentity();
    mpkChannelApplyFrustum( c );

    glMatrixMode( GL_MODELVIEW );
    glLoadIdentity();
    mpkChannelApplyTransformation( c );
```

```
    glTranslatef( framedata->translation[0],
                 framedata->translation[1],
                 framedata->translation[2] );

    glMultMatrixf( framedata->rotation );

    drawcube();
}
```

Since MPK manages the frustum, the draw callback should always use MPK functions to set up the frustum. The function **mpkChannelApplyFrustum()** applies an OpenGL frustum matrix for the passed MPKChannel with respect to the current eye pass, eye position, and the channel's physical layout specification. For orthographic views, MPK provides the call **mpkChannelApplyOrtho()** as an alternative to **mpkChannelApplyFrustum()**. MPK uses the mode `MPK_ORTHO_STILL` or `MPK_ORTHO_TRACKED` to apply an OpenGL orthographic matrix. If the orthographic mode is `MPK_ORTHO_STILL`, then **mpkChannelApplyOrtho()** simply uses the half-width and half-height dimensions of the channel layout to produce the distances used in **glOrtho()**. Otherwise, if orthographic mode is `MPK_ORTHO_TRACKED`, then **mpkChannelApplyOrtho()** uses the current view direction (for example, from **mpkConfigSetHeadOrientation()**) to produce consistent viewing across all channels in the configuration. Figure 2-5 illustrates an example of `MPK_ORTHO_STILL` (left side) and `MPK_ORTHO_TRACKED` (right side). The argument `zoom` specifies two-dimensional scaling on the X and Y screen coordinates.

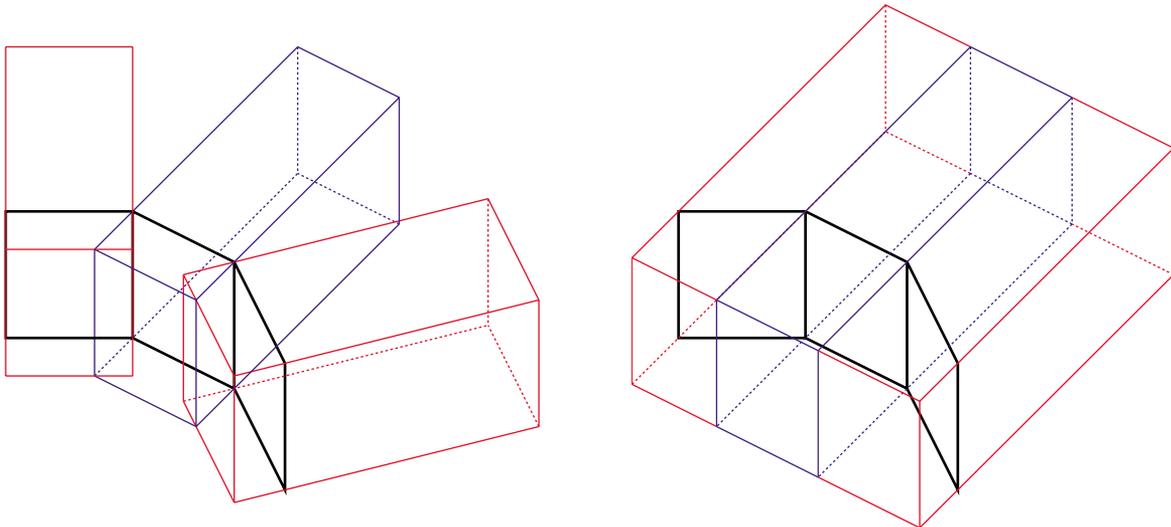


Figure 2-5 MPK_ORTHO_STILL and MPK_ORTHO_TRACKED Frusta

To position and orient the frustum specified by **mpkChannelApplyFrustum()** or **mpkChannelApplyOrtho()**, the function **mpkChannelApplyTransformation()** applies the necessary modeling transformation.

Once the frustum is set up correctly, the scene is positioned according to the rotation and translation of the current frame data. The function **drawcube()** draws the database, a colored cube.

Event Processing

MPK provides a flexible solution to process events. The event gathering and processing is centralized in the application thread.

In order to receive events, each window has an input display, which is created during **mpkWindowOpenDisplay()**. MPK uses **XSelectInput()** to request events on a given window. The functions **mpkConfigSelectInput()**, **mpkPipeSelectInput()**, and **mpkWindowSelectInput()** can be used to change the event mask for all windows in the given hierarchy.

The event processing is done at the end of the frame by calling an event processing callback. By default, this callback is set to **mpkConfigHandleEvents()**. The callback polls for XEvents on all input displays and encapsulates the XEvents in MPKEvents. This MPKEvent is then processed by the any-event callback of the matching window. The default any-event callback, **mpkWindowProcessEvent()**, calls the other window event callbacks based on the event type. The pseudo code for the default event processing in **mpkConfigHandleEvents()** is shown in Example 2-9.

Example 2-9 Pseudo Code for **mpkConfigHandleEvents()**

```
foreach input display connection
  while XEvent pending
    receive XEvent
    find matching MPKWindow
    encapsulate XEvent in MPKEvent
    update MPKEventXData
    call window any-event callback
      | default:
      | mpkWindowProcessEvent
      |   call exit, expose, configure, mouse, button or keyboard
      |   event callback based on event type
    end while
  end for
```

This architecture enables MPK to provide support for the various event processing scenarios:

- Event-driven applications
An application that is event-driven redraws only when user input or other events require a redraw. Usually, these applications set the configuration's event callback to NULL and process the events themselves by using **mpkConfigNextEvent()** and **mpkConfigCheckEvent()**. This enables the application to issue a new **mpkConfigFrame()** call whenever necessary. The example `flip.eventDriven` shows such an application.
- Applications that are not event-driven
For some applications it is necessary to continuously draw new frames, for example, to display animations. MPK's default event processing does not block for new events; thus, it returns as soon as all pending events are processed. This leads naturally to the desired behavior.
- No MPK event processing

Some applications already have their own event processing model. By setting the window's input display to `NULL` during window initialization and setting the configuration's event callback to `NULL`, MPK event processing is disabled.

As cited in an earlier section, the `MPKEvent` data structure encapsulates an X11 event. It provides convenience functions to decode the data in the corresponding `XEvent`. Note that the `MPKEvent` is freed automatically by MPK. Hence, the pointer to an `MPKEvent` should not be stored within the application.

The event callbacks of the example program in this section, as shown in Example 2-10, provide some mouse interaction as well as the possibility to switch the stereo mode by pressing `s`.

Example 2-10 Window Event Callbacks for Mouse, Keyboard, and Exit

```
void windowMouse( MPKWindow *w, MPKEvent *event )
{
    MPKEventXData *data = (MPKEventXData *) mpkEventGetData( event );

    if ( data->button.left )
    {
        if ( data->button.middle )
        {
            shared->dz += (float) data->mouse.dy/200.;
        }
        else
        {
            shared->dx += (float) data->mouse.dx/500.;
            shared->dy -= (float) data->mouse.dy/500.;
        }
    }
    else if ( data->button.middle )
    {
        shared->xangle = (float) data->mouse.dy*.5;
        shared->yangle = (float) data->mouse.dx*.5;
    }
}

void windowExit( MPKWindow *w, MPKEvent *event )
{
    shared->exit = GL_TRUE;
}

void windowKeyboard( MPKWindow *w, MPKEvent *event )
```

```
{
    MPKEventXData *data = (MPKEventXData *)mpkEventGetData( event );

    if ( data->keyboard.state != MPK_PRESS )
        return;

    switch( data->keyboard.key )
    {
        case XK_S:
        case XK_s:
            shared->stereo = !shared->stereo;
            break;
    }
}
```

A Graceful Exit

Eventually, application processing leaves the main loop. In the sample program in this section, the exit-window callback, which is called whenever `Esc` is pressed, sets the exit flag to true. This causes the main loop shown in Example 2-5 in section “The Main Loop” to terminate.

Example 2-11 shows a simple exit sequence.

Example 2-11 A Simple Exit Sequence

```
//----- restore MONO

mpkConfigSetWindowInitCB( config, NULL );
mpkConfigSetChannelInitCB( config, NULL );
mpkConfigChangeMode( config, MPK_MONO );

//----- exit & delete config

mpkConfigExit( config );
mpkConfigDelete( config );

exitSharedData( shared );
mpkFree( shared );

mpkExit();
```

The first part of Example 2-11 restores the mono mode upon exiting. This may not be desired for other applications, but in this case it is provided for convenience. The initialization callbacks are set to `NULL` to avoid unnecessary window creation in case the configuration is restarted.

The second part contains the actual cleanup. It exits the configuration; this action will cause the exit callbacks, shown in Example 2-12, to be called in the reverse order of the initialization callbacks.

In Example 2-11, nothing has to be done in order to exit the `MPKWindow`. Therefore, the `MPKConfig`'s exit-window callback is set to `NULL`. The X exit callback calls **`mpkWindowDestroy()`**, which performs the following operations:

```
mpkWindowDestroyDrawable( window );
mpkWindowDestroyFBConfig( window );

mpkWindowCloseDisplay( window );
```

The OpenGL exit callback destroys the OpenGL context.

Example 2-12 The Exit Callbacks

```
//-----  
// exitWindowX  
//-----  
void exitWindowX( MPKWindow *w )  
{  
    mpkWindowDestroy( w );  
}  
  
//-----  
// exitWindowGL  
//-----  
void exitWindowGL( MPKWindow *w )  
{  
    // destroy ctx  
    mpkWindowMakeCurrentNone( w );  
    mpkWindowDestroyContext( w );  
}
```

After **mpkConfigExit()** is called, all window threads are terminated. The **MPKConfig** data structure and all of its children are freed by calling **mpkConfigDelete()**. Next, before the final **mpkExit()**, the shared data is deinitialized and freed using **mpkFree()**, the **mpkMalloc()** counterpart.

Example Code

The source code in Example 2-13 is the full example for the simple MPK application described part by part in the preceding subsections.

Example 2-13 A Simple MPK Application

```

/* compile using 'cc -o example example.c -lm -lmpk -lGL -lpthread' */

#include <mpk/mpk.h>

#include <X11/keysym.h>
#include <math.h>
#include <stdio.h>

#ifndef M_PI
#define M_PI 3.1415926535
#endif

#define DEG2RAD(a) ((a)*M_PI/180.)

typedef struct
{
    int    stereo;
    int    exit;

    float  xangle, yangle,
           dx, dy, dz,
           translation[3],
           rotation[16];

} Shared;

typedef struct _FrameData
{
    float  translation[3],
           rotation[16];

    struct _FrameData *next;

} FrameData;

Shared    *shared;
FrameData *frameDataBuffer = NULL;
FrameData *newFrameData( Shared *shared );

```

```
void      freeFrameData( MPKConfig *, void * );

void      initSharedData( Shared *shared );
void      exitSharedData( Shared *shared );

void      initWindow( MPKWindow * );
void      initWindowX( MPKWindow * );
void      initWindowGL( MPKWindow * );
void      exitWindowX( MPKWindow * );
void      exitWindowGL( MPKWindow * );

void      initChannel( MPKChannel *c );
void      clearChannel( MPKChannel *, void * );
void      updateChannel( MPKChannel *, void * );

void      windowMouse( MPKWindow *, MPKEvent * );
void      windowExit( MPKWindow *, MPKEvent * );
void      windowKeyboard( MPKWindow *, MPKEvent * );

void      incrementRotation( float *, float, float );
void      drawcube();

static float lightpos[] = { 0., 0., 1., 0. };

//-----
//  main
//-----
main( int argc, char *argv[] )
{
    MPKConfig *config;
    FrameData *framedata;

    mpkGlobalSetExecutionMode( MPK_EXECUTION_PTHREAD );

    mpkInit();

    // shared must be allocated after mpkInit().
    shared = mpkMalloc( sizeof( Shared ) );
    initSharedData( shared );

    if (argc < 2)
        config = mpkConfigLoad("../configs/l-window");
    else
        config = mpkConfigLoad(argv[1]);
}
```

```
if ( config == NULL )
{
    fprintf(stderr, "Can't load config file.\n");
    exit (0);
}

mpkConfigOutput( config, 0 );

shared->stereo = ( mpkConfigGetMode(config)==MPK_STEREO ? 1 : 0 );

mpkConfigSetWindowInitCB(config,initWindow);
mpkConfigSetWindowExitCB(config,NULL);
mpkConfigSetChannelInitCB(config,initChannel);
mpkConfigSetDataFreeCB( config, freeFrameData );

mpkConfigInit( config, 0 );

while (!shared->exit )
{
    // update DB
    incrementRotation( shared->rotation,
                      shared->xangle,
                      shared->yangle );

    shared->translation[0] += shared->dx;
    shared->translation[1] += shared->dy;
    shared->translation[2] += shared->dz;

    shared->dx = 0.;
    shared->dy = 0.;
    shared->dz = 0.;

    // new frame
    mpkConfigChangeMode( config, shared->stereo );
    framedata = newFrameData( shared );
    mpkConfigFrame( config, framedata );
}

//----- restore MONO

mpkConfigSetWindowInitCB(config,NULL);
mpkConfigSetChannelInitCB(config,NULL);
mpkConfigChangeMode( config, MPK_MONO );

//----- exit & delete config
```

```
    mpkConfigExit( config );
    mpkConfigDelete( config );

    exitSharedData( shared );
    mpkFree( shared );

    mpkExit();
}

//-----
//  initSharedData
//-----
void initSharedData( Shared *shared )
{
    int i, j;

    shared->exit = 0;
    shared->stereo = MPK_MONO;
    shared->yangle = 0.;
    shared->xangle = 0.;

    for (i=0; i<4; i++)
        for (j=0; j<4; j++)
            shared->rotation[4*i+j] = (i==j) ? 1. : 0.;

    shared->dx = 0.;
    shared->dy = 0.;
    shared->dz = 0.;
    shared->translation[0] = 0.;
    shared->translation[1] = 0.;
    shared->translation[2] = -2.;
}

//-----
//  exitSharedData
//-----
void exitSharedData( Shared *shared )
{
    while ( frameDataBuffer != NULL )
    {
        FrameData *framedata = frameDataBuffer;

        frameDataBuffer = framedata->next;
    }
}
```

```

        mpkFree( framedata );
    }
}

//-----
//  initWindow
//-----
void initWindow( MPKWindow *w )
{
    mpkWindowSetDrawCB( w, MPK_WINDOW_DRAWCB_INIT_X, initWindowX );
    mpkWindowSetDrawCB( w, MPK_WINDOW_DRAWCB_INIT_GL, initWindowGL );
    mpkWindowSetDrawCB( w, MPK_WINDOW_DRAWCB_EXIT_X, exitWindowX );
    mpkWindowSetDrawCB( w, MPK_WINDOW_DRAWCB_EXIT_GL, exitWindowGL );

    mpkWindowSetEventCB( w, MPK_WINDOW_EVENTCB_MOUSE, windowMouse );
    mpkWindowSetEventCB( w, MPK_WINDOW_EVENTCB_BUTTON, windowMouse );
    mpkWindowSetEventCB( w, MPK_WINDOW_EVENTCB_EXIT, windowExit );
    mpkWindowSetEventCB( w, MPK_WINDOW_EVENTCB_KEYBOARD, windowKeyboard );
}

//-----
//  initWindowX
//-----
void initWindowX( MPKWindow *w )
{
    mpkWindowCreate( w );
}

//-----
//  initWindowGL
//-----
void initWindowGL( MPKWindow *w )
{
    // create ctx
    mpkWindowCreateContext( w );
    mpkWindowMakeCurrent( w );

    // GL initialization
    mpkWindowApplyViewport( w );

    glEnable( GL_DEPTH_TEST );
    glDepthFunc (GL_LESS);

    glEnable( GL_LIGHTING );
    glEnable( GL_LIGHT0 );
}

```

```
    glLightfv( GL_LIGHT0, GL_POSITION, lightpos );

    glColorMaterial( GL_FRONT_AND_BACK, GL_DIFFUSE );
    glEnable( GL_COLOR_MATERIAL );

    glClearDepth( 1. );
    glClearColor( 0., 0., 0., 1. );

    // clear both buffers
    glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT );
    mpkWindowSwapBuffers(w);
    glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT );
}

//-----
// exitWindowX
//-----
void exitWindowX( MPKWindow *w )
{
    mpkWindowDestroy( w );
}

//-----
// exitWindowGL
//-----
void exitWindowGL( MPKWindow *w )
{
    // destroy ctx
    mpkWindowMakeCurrentNone( w );
    mpkWindowDestroyContext( w );
}

//-----
// initChannel
//-----
void initChannel( MPKChannel *c )
{
    mpkChannelSetDrawCB( c, MPK_CHANNEL_DRAWCB_CLEAR, clearChannel );
    mpkChannelSetDrawCB( c, MPK_CHANNEL_DRAWCB_UPDATE, updateChannel );
}

//-----
// newFrameData
//-----
FrameData *newFrameData( Shared *shared )
```

```

{
    FrameData *framedata;
    if ( frameDataBuffer == NULL )
    {
        framedata = (FrameData *) mpkMalloc( sizeof(FrameData) );
    }
    else
    {
        framedata = frameDataBuffer;
        frameDataBuffer = framedata->next;
    }

    framedata->next = NULL;

    memcpy( framedata->translation,
            shared->translation, 3*sizeof(float) );
    memcpy( framedata->rotation, shared->rotation, 16*sizeof(float) );

    return framedata;
}

//-----
// freeFrameData
//-----
void freeFrameData( MPKConfig *cfg, void *data )
{
    FrameData *framedata = (FrameData *)data;

    framedata->next = frameDataBuffer;
    frameDataBuffer = framedata;
}

//-----
// clearChannel
//-----
void clearChannel( MPKChannel *c, void *data )
{
    mpkChannelApplyBuffer( c );
    mpkChannelApplyViewport( c );

    glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT );
}

//-----
// updateChannel

```

```
//-----  
void updateChannel( MPKChannel *c, void *data )  
{  
    FrameData *framedata = (FrameData *)data;  
  
    glMatrixMode( GL_PROJECTION );  
    glLoadIdentity();  
  
    mpkChannelApplyFrustum( c );  
  
    glMatrixMode( GL_MODELVIEW );  
    glLoadIdentity();  
    mpkChannelApplyTransformation( c );  
  
    glTranslatef( framedata->translation[0],  
                 framedata->translation[1],  
                 framedata->translation[2] );  
  
    glMultMatrixf( framedata->rotation );  
  
    drawcube();  
}  
  
//-----  
// windowMouse  
//-----  
void windowMouse( MPKWindow *w, MPKEvent *event )  
{  
    MPKEventXData *data = (MPKEventXData *) mpkEventGetData( event );  
  
    if ( data->button.left )  
    {  
        if ( data->button.middle )  
        {  
            shared->dz += (float) data->mouse.dy/200.;  
        }  
        else  
        {  
            shared->dx += (float) data->mouse.dx/500.;  
            shared->dy -= (float) data->mouse.dy/500.;  
        }  
    }  
    else if ( data->button.middle )  
    {  
        shared->xangle = (float) data->mouse.dy*.5;  
    }  
}
```



```

        shared->yangle = (float) data->mouse.dx*.5;
    }
}

//-----
// windowExit
//-----
void windowExit( MPKWindow *w, MPKEvent *event )
{
    shared->exit = GL_TRUE;
}

//-----
// windowKeyboard
//-----
void windowKeyboard( MPKWindow *w, MPKEvent *event )
{
    MPKEventXData *data = (MPKEventXData *)mpkEventGetData( event );

    if ( data->keyboard.state != MPK_PRESS )
        return;

    switch( data->keyboard.key )
    {
        case XK_S:
        case XK_s:
            shared->stereo = !shared->stereo;
            break;
    }
}

//-----
// incrementRotation
//-----
static void xformColumn( float *m, int i, int j, int k,
                        float cosX, float sinX,
                        float cosY, float sinY )
{
    float aux = sinX*m[j] + cosX*m[k];
    float x = sinY*aux + cosY*m[i];
    float y = cosX*m[j] - sinX*m[k];
    float z = cosY*aux - sinY*m[i];
    m[i] = x;
    m[j] = y;
    m[k] = z;
}

```

```
    }

void incrementRotation( float *matrix, float xangle, float yangle )
{
    float cosX, sinX, cosY, sinY;

    cosX = cos( DEG2RAD(xangle) );
    sinX = sin( DEG2RAD(xangle) );
    cosY = cos( DEG2RAD(yangle) );
    sinY = sin( DEG2RAD(yangle) );
    xformColumn( matrix, 0, 1, 2, cosX, sinX, cosY, sinY );
    xformColumn( matrix, 4, 5, 6, cosX, sinX, cosY, sinY );
    xformColumn( matrix, 8, 9, 10, cosX, sinX, cosY, sinY );
}

//-----
// drawcube
//-----
#define CUBE_SIZE    .25
void drawcube()
{
    glColor3f( 0., 0., 1. );
    glNormal3f( 0., 0., -1. );
    glBegin( GL_TRIANGLE_STRIP );
    glVertex3f(-CUBE_SIZE,-CUBE_SIZE,-CUBE_SIZE);
    glVertex3f(-CUBE_SIZE, CUBE_SIZE,-CUBE_SIZE);
    glVertex3f( CUBE_SIZE,-CUBE_SIZE,-CUBE_SIZE);
    glVertex3f( CUBE_SIZE, CUBE_SIZE,-CUBE_SIZE);
    glEnd();

    glColor3f( 0., 1., 0. );
    glNormal3f( 0., -1., 0. );
    glBegin( GL_TRIANGLE_STRIP );
    glVertex3f(-CUBE_SIZE,-CUBE_SIZE,-CUBE_SIZE);
    glVertex3f(-CUBE_SIZE,-CUBE_SIZE, CUBE_SIZE);
    glVertex3f( CUBE_SIZE,-CUBE_SIZE,-CUBE_SIZE);
    glVertex3f( CUBE_SIZE,-CUBE_SIZE, CUBE_SIZE);
    glEnd();

    glColor3f( 1., 1., 1. );
    glNormal3f( -1., 0., 0. );
    glBegin( GL_TRIANGLE_STRIP );
    glVertex3f(-CUBE_SIZE,-CUBE_SIZE,-CUBE_SIZE);
    glVertex3f(-CUBE_SIZE, CUBE_SIZE,-CUBE_SIZE);
    glVertex3f(-CUBE_SIZE,-CUBE_SIZE, CUBE_SIZE);
}
```

```
glVertex3f(-CUBE_SIZE, CUBE_SIZE, CUBE_SIZE);
glEnd();

glColor3f( 1., 0., 0. );
glNormal3f( 0., 1., 0. );
glBegin( GL_TRIANGLE_STRIP );
glVertex3f(-CUBE_SIZE, CUBE_SIZE, -CUBE_SIZE);
glVertex3f(-CUBE_SIZE, CUBE_SIZE, CUBE_SIZE);
glVertex3f( CUBE_SIZE, CUBE_SIZE, -CUBE_SIZE);
glVertex3f( CUBE_SIZE, CUBE_SIZE, CUBE_SIZE);
glEnd();

glColor3f( 1., 0., 1. );
glNormal3f( 1., 0., 0. );
glBegin( GL_TRIANGLE_STRIP );
glVertex3f( CUBE_SIZE, -CUBE_SIZE, -CUBE_SIZE);
glVertex3f( CUBE_SIZE, -CUBE_SIZE, CUBE_SIZE);
glVertex3f( CUBE_SIZE, CUBE_SIZE, -CUBE_SIZE);
glVertex3f( CUBE_SIZE, CUBE_SIZE, CUBE_SIZE);
glEnd();

glColor3f( 1., 1., 0. );
glNormal3f( 0., 0., 1. );
glBegin( GL_TRIANGLE_STRIP );
glVertex3f(-CUBE_SIZE, -CUBE_SIZE, CUBE_SIZE);
glVertex3f( CUBE_SIZE, -CUBE_SIZE, CUBE_SIZE);
glVertex3f(-CUBE_SIZE, CUBE_SIZE, CUBE_SIZE);
glVertex3f( CUBE_SIZE, CUBE_SIZE, CUBE_SIZE);
glEnd();
}
```


Using Compounds

This chapter describes how you can use compounds (or conversely, decomposition) to scale the performance of your graphics application. Decomposition allows you to use multiple pipes to render frames that would normally be rendered by a single pipe.

This chapter has the following sections:

- “Scalable Rendering”
- “Building Compounds”
- “Stereo-Selective Compounds”
- “Automatic Load Balancing for Compounds”
- “Choosing the Right Decomposition Mode”
- “Compound-Specific Callbacks”
- “Traversing Compounds”

Scalable Rendering

To achieve greater application performance, MPK allows you to decompose a global rendering task into smaller tasks and to assign the smaller tasks to individual pipes. The task division requires a decomposition scheme. In general, a decomposition scheme sends a scene to render to each pipe, gets back rendered images from each pipe for further composition, and then renders the final image. An exception is cull decomposition, where the cull operation is parallelized with the draw operation.

Figure 3-1 illustrates the role of *source* and *destination* channels in scalable rendering.

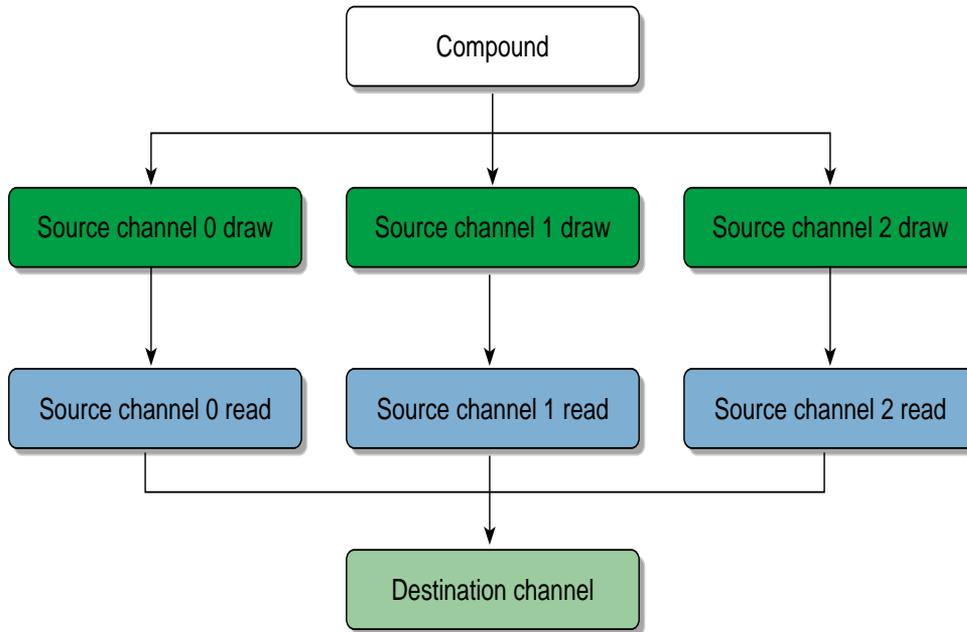


Figure 3-1 Source and Destination Channels

Building Compounds

To build a compound, you must create a MPKCompound data structure. The manual *SGI OpenGL Multipipe SDK User's Guide* describes the syntax of the MPKCompound data structures for your configuration file. This section describes how you build them logically.

Generally, to create a compound, you need to do the following:

1. Choose a decomposition scheme, which divides the global rendering task into smaller tasks.
2. Distribute the rendering of the smaller tasks to the source pipes for parallel processing.
3. Designate a destination channel for the reassembly of the final, coherent image.

The destination channel is usually one of the source channels. To achieve optimal performances, you would usually have one channel per pipe.

This chapter focuses on the three tasks just cited. Optionally, you can also do the following:

- Indicate whether your compound is used in only stereo or mono mode.
- Indicate controls for the pixel data transfers between the compound and its regions.
- Indicate whether to use scalable graphics hardware.
- Indicate whether to use automatic load balancing.

The section “Stereo-Selective Compounds” on page 81 describes how you control whether your compound is used depending on the stereo mode of the application. For more information on the first two optional tasks, see the *SGI OpenGL Multipipe SDK User’s Guide* for the description of the `mode` and `format` fields of the `MPKCompound` data structure. “Hardware Compositing” in Chapter 5 describes the integration of scalable graphics with MPK. The section “Automatic Load Balancing for Compounds” on page 82 describes how MPK balances the rendering for certain compound modes.

MPK provides several decomposition schemes and the following subsections describe these schemes:

- “Frame Decomposition” on page 54
- “Temporal Decomposition” on page 66
- “Pixel-Based Decomposition” on page 74
- “Cull Decomposition” on page 76
- “Multilevel Decomposition” on page 78

Each decomposition mode improves performance or graphics quality, but the performance gain depends on the application type and the nature of the performance bottleneck. Four factors are important in choosing the decomposition scheme:

| Factor | Description |
|--------------------------|--|
| Load balancing | For a given decomposition, each pipe should execute roughly the same amount of work since the slowest pipe dictates the overall performance. Unbalanced decomposition can seriously affect the scalability. |
| Scalability of scheme | Scalability is the degree to which the performance grows as the number of graphics resources increases. To optimize performance, you only add resources to address the source of the bottleneck. For example, adding more geometry power to an application limited by pixel fill will not improve performance. |
| Latency added | Depending on the decomposition scheme, the frame delay between a user input and the associated frame output may be greater than one frame. Minimizing this latency may be critical for some event-driven applications. |
| Graphics I/O consumption | A typical decomposition involves the reading and writing of images from the source channels (contributing channels) to a destination channel. This transfer might stress the graphics I/O and memory capabilities of the system. |

Frame Decomposition

In frame decomposition, a frame or view is divided into regions, which are, in turn, assigned to individual source pipes for rendering. Based on the following perspectives, there are several approaches to dividing the frame into regions:

- Screen topology (screen decomposition)
- Scene graph primitives (database decomposition)
- Eye view (eye decomposition)

Each approach yields a different flavor of frame decomposition.

Screen Decomposition

In screen decomposition (also referred to as 2D decomposition), each pipe renders a part of the screen area. Assembling side-to-side each image part constitutes the final rendering. This type of decomposition is used when the intrinsic pixel fill or geometry capacity of each pipe slows down the application. The scalability depends on the balancing of the workloads. The model to display needs to be uniformly distributed across the screen to accommodate a good balancing and, thus, scalability. The graphics I/O is relatively low, because the traveling source images are small.

Figure 3-2 illustrates screen decomposition.

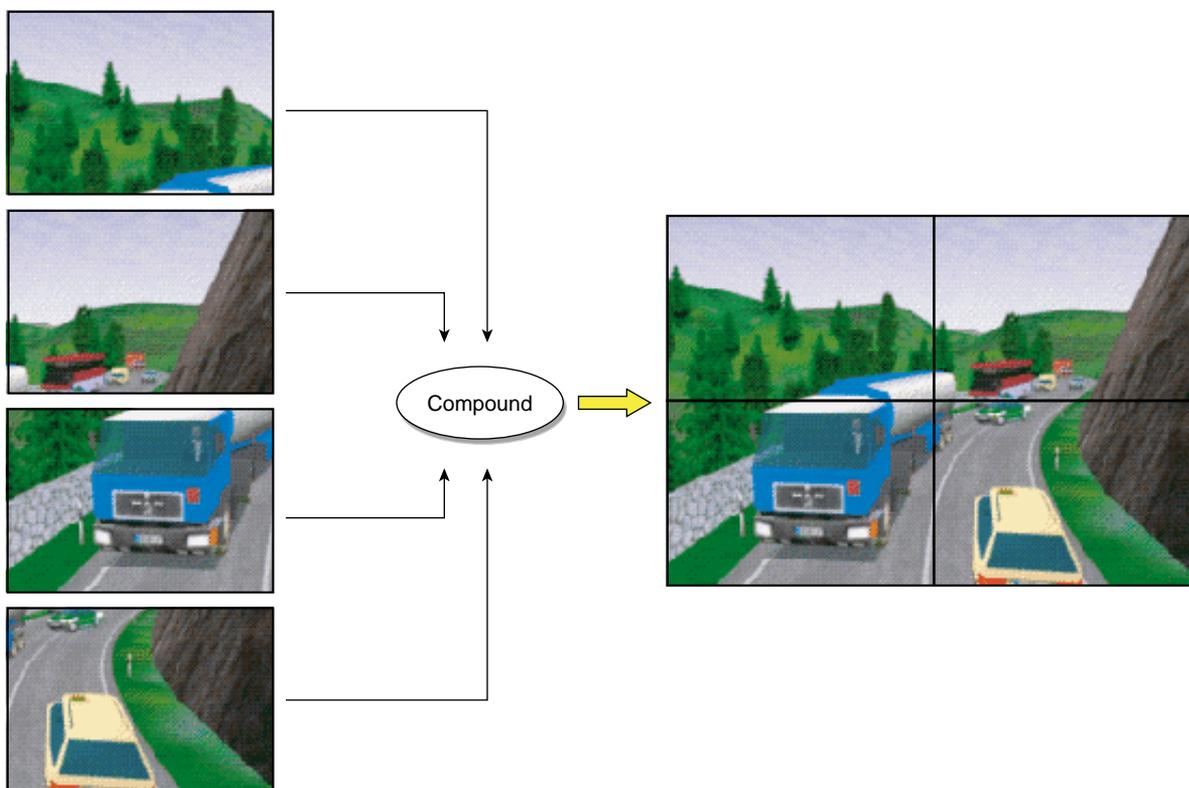


Figure 3-2 Screen Decomposition

Example 3-1 shows the configuration file specifications for the screen decomposition illustrated in Figure 3-2.

Example 3-1 2D Compound in a Configuration File

```
compound {
    mode [2D]
    channel "destination"

    # The top left of "destination" image will be
    # rendered on "source0"...
    region {
        viewport [ 0., .5, .5, .5 ]
        channel "source0"
    }

    # The top right of "destination" image will be
    # rendered on "source1"...
    region {
        viewport [ .5, .5, .5, .5]
        channel "source1"
    }

    # The bottom left of "destination" image will be
    # rendered on "source2"...
    region {
        viewport [ 0., 0., .5, .5 ]
        channel "source2"
    }

    # ... while "destination" itself takes care of
    # the bottom right
    region {
        viewport [ .5, 0., .5, .5 ]
        channel "destination"
    }
}
```

Figure 3-3 shows how the configuration in Example 3-1 executes.

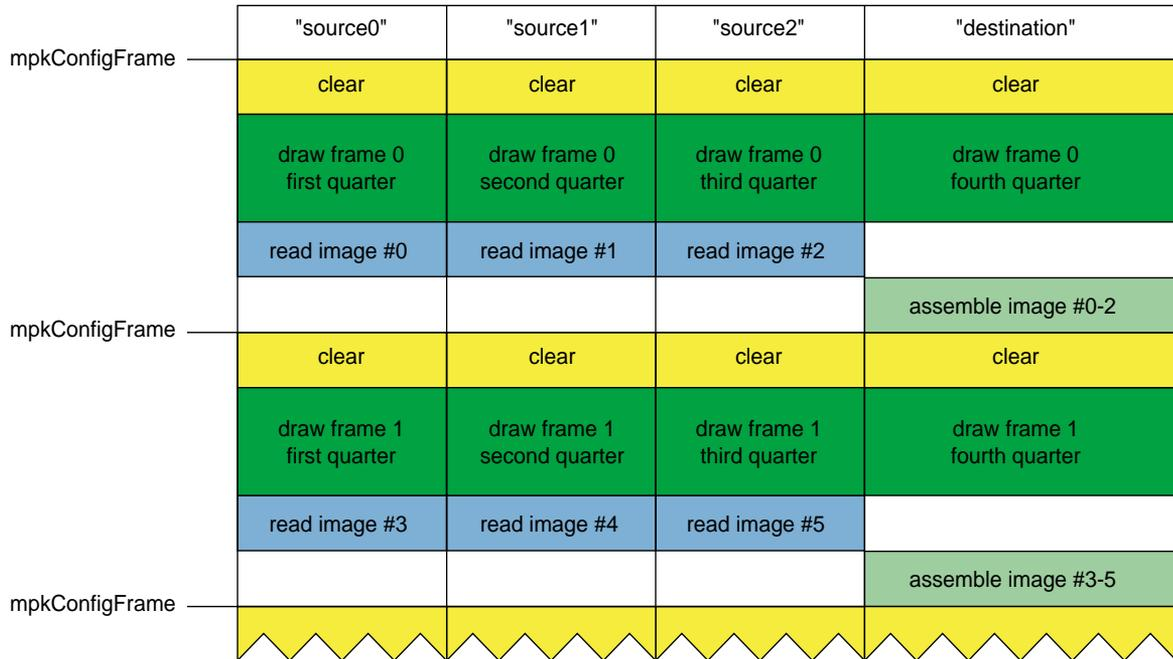


Figure 3-3 The Execution of a 2D Compound

By adding the mode flag `ASYNC`, the frame rate can be improved because of the lower consumption of graphics I/O, as shown in Figure 3-4. Note that the `ASYNC` configuration has a latency of one.

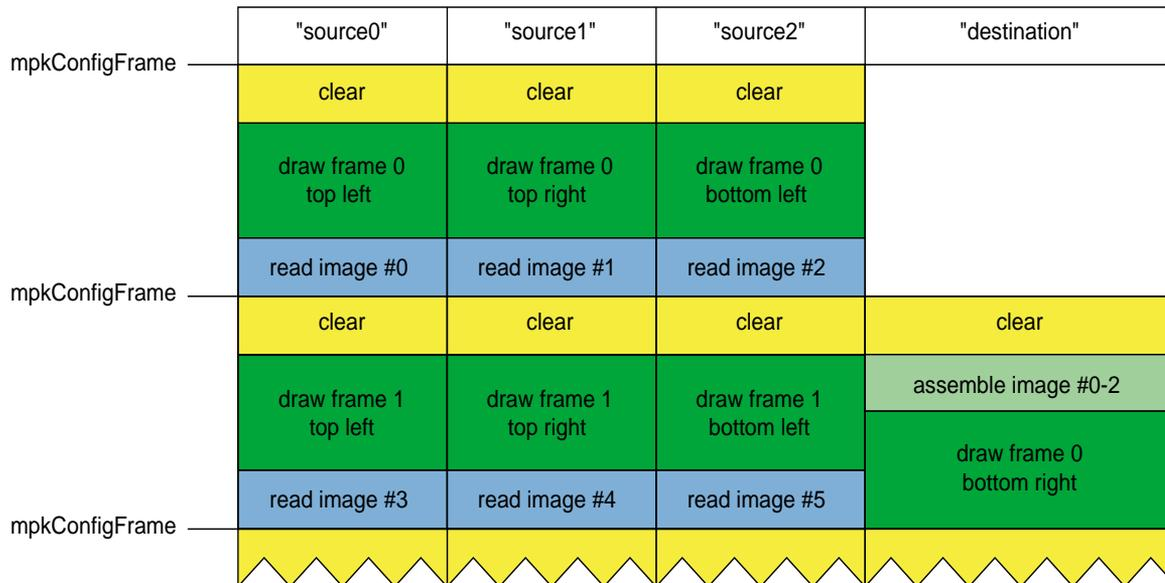


Figure 3-4 The Execution of a 2D ASYNC Compound

Database Decomposition

In database (DB) decomposition, the scene is rendered in parallel by dividing it among the different graphics pipes. Each pipe renders its share of the scene to generate partial images. These images are then composited by MPK to generate the final image in the destination channel. During composition, the application can use depth testing and/or alpha blending to achieve the desired effect. Database decomposition allows you to scale both the geometry and the pixel fill performance of the system. For some applications, such as volume rendering, it also scales the texture memory capacity of the system by the number of pipes.

Figure 3-5 demonstrates the use of database decomposition in volume rendering. The volume data is divided equally among the four pipes and the partial images are composited on the destination channel. In this case, the destination channel (top left portion of the figure) is also contributing to the rendering as a source channel.

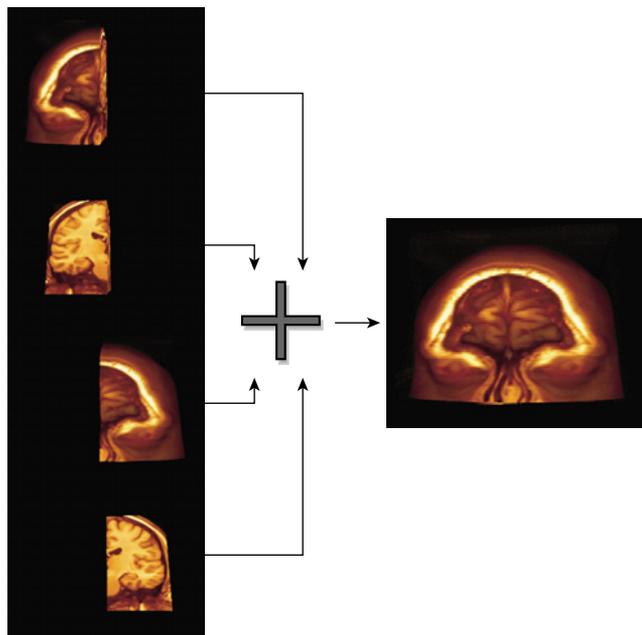


Figure 3-5 Database Decomposition

Example 3-2 shows the configuration file specifications for the database decomposition illustrated in Figure 3-5.

Example 3-2 DB Compound in a Configuration File

```
compound {
  mode      [ DB ]
  format    [ COLOR DEPTH ]
  channel   "channel"

  region {
    range    [ 0., .25 ]
    channel   "buffer0"
  }

  region {
    range    [ .25, .5 ]
    channel   "buffer1"
  }

  region {
    range    [ .5, .75 ]
    channel   "buffer3"
  }

  region {
    range    [ .75, 1. ]
    channel   "channel"
  }
}
```

Figure 3-6 shows how the configuration in Example 3-2 executes.

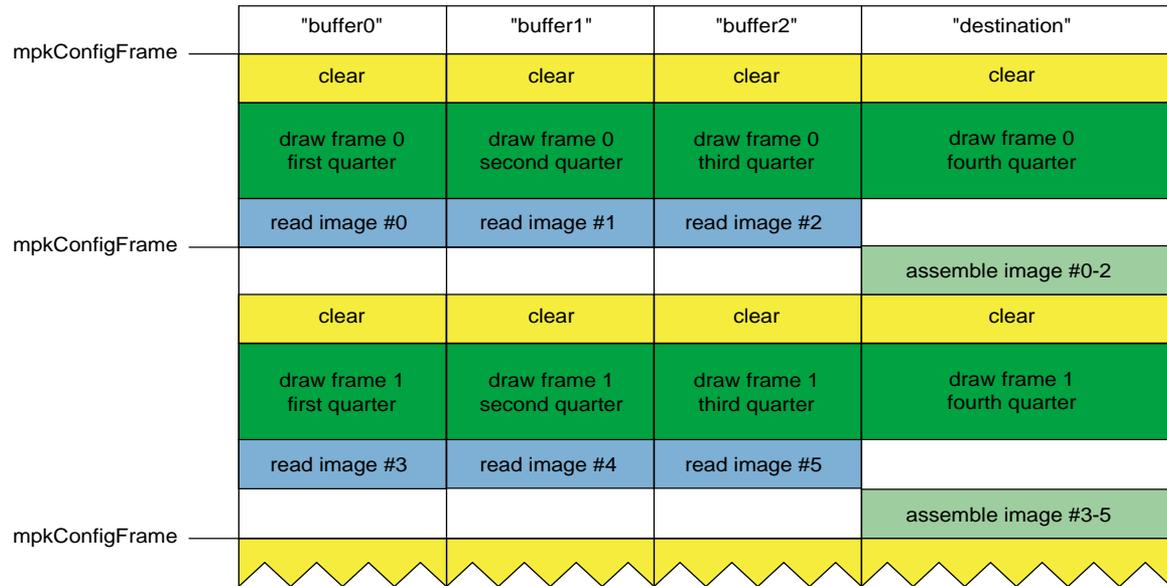


Figure 3-6 The Execution of a DB Compound

In order to support this decomposition scheme, the application has to use the range field to draw the correct part of the database in the MPKChannel's update draw callback. The range can be acquired using **mpkChannelGetRange()**.

The default DB assembly uses the following pseudo code to assemble the frames using Z-based recomposition:

```

if ASYNC flag is set
    draw depth buffer of first input frame
    draw color buffer of first input frame
end if

enable stencil test

for all remaining input frames
    enable depth test
    draw depth buffer and set stencil bit where depth-test passes
    disable depth test
    draw color buffer where stencil bit set
end for

```

Some applications, such as volume rendering, may want to use a different recomposition technique than MPK's default procedure. The later section "Compound-Specific Callbacks" explains how to use custom assemble-compound callbacks.

By adding the mode flag `ASYNC`, the frame rate can be improved because of the lower consumption of graphics I/O, as shown in Figure 3-7. Note that the `ASYNC` configuration has a latency of one.

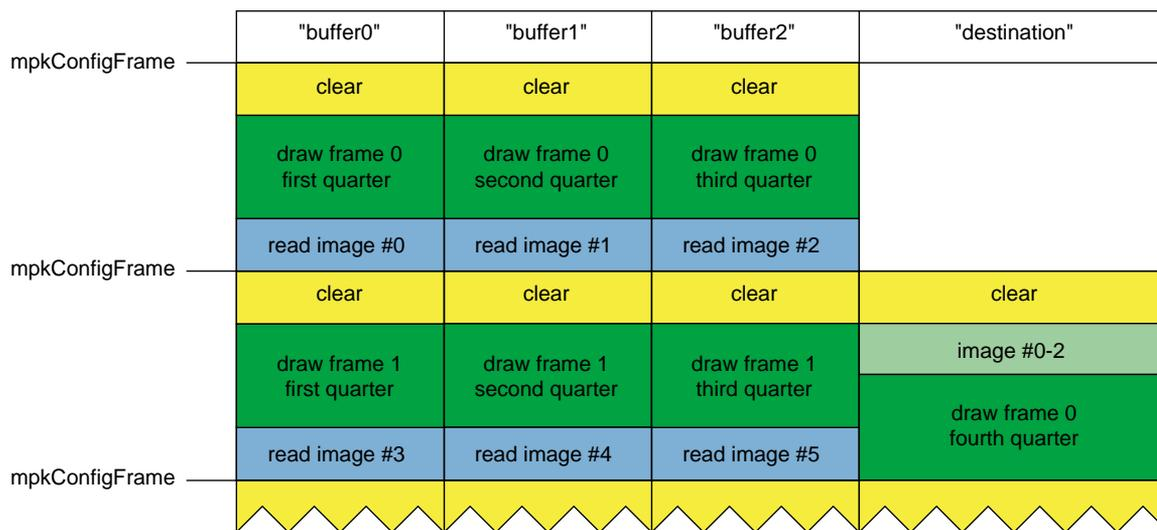


Figure 3-7 The Execution of a DB `ASYNC` Compound

Eye Decomposition

Eye decomposition is well-suited for stereo or multiple-view rendering. Each pipe renders a particular view (left, right, mono). The final rendering depends on the type of display. As illustrated in Figure 3-8, if stereo is active, then each pipe view fills in the right or left buffer of the final rendering. This provides good load balancing and scalability, especially for stereo-view rendering, because the scene content remains similar during run time.

An `EYE` compound has no frame latency, unless the mode qualifier `ASYNC` has been specified and pixel transfer needs to occur, in which case the latency is 1.

The number of regions of an eye compound is not limited. If more than one region correspond to the same eye view, MPK uses the first specified region (for this eye) as source for the pixel transfer, if needed.

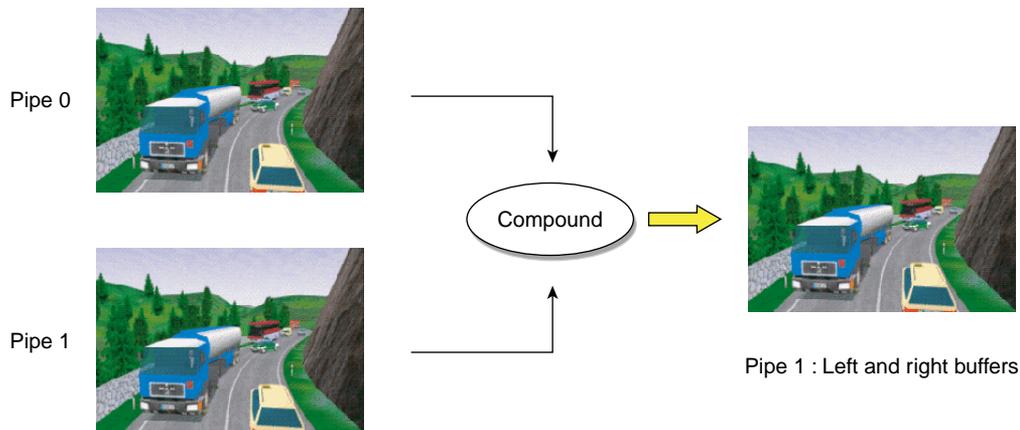


Figure 3-8 Eye Decomposition

Example 3-3 shows the configuration file specifications for the eye decomposition illustrated in Figure 3-8.

Example 3-3 Eye Compound in a Configuration File

```
compound {
    mode    [ EYE STEREO ]
    channel "channel"

    region {
        eye    LEFT
        channel "buffer"
    }

    region {
        eye    RIGHT
        channel "channel"
    }
}
```

Head-Mounted-Device (HMD) decomposition is very similar to that of eye decomposition, except that the head position actually specifies a new origin for the physical layout of the channels.

Example 3-4 shows a configuration file specification for an HMD decomposition:

Example 3-4 HMD Compound in a Configuration File

```
compound {
  mode [HMD]
  channel "destination"

  region {
    eye    left
    channel "source::left"
  }

  region {
    eye    right
    channel "source::right"
  }
}
```

If a destination channel is specified, then the frustum is inherited from the destination channel's wall or projection frustum specification; otherwise, the source channel's frustum specification will be used.

Figure 3-9 shows how the configurations for Example 3-3 and Example 3-4 execute.

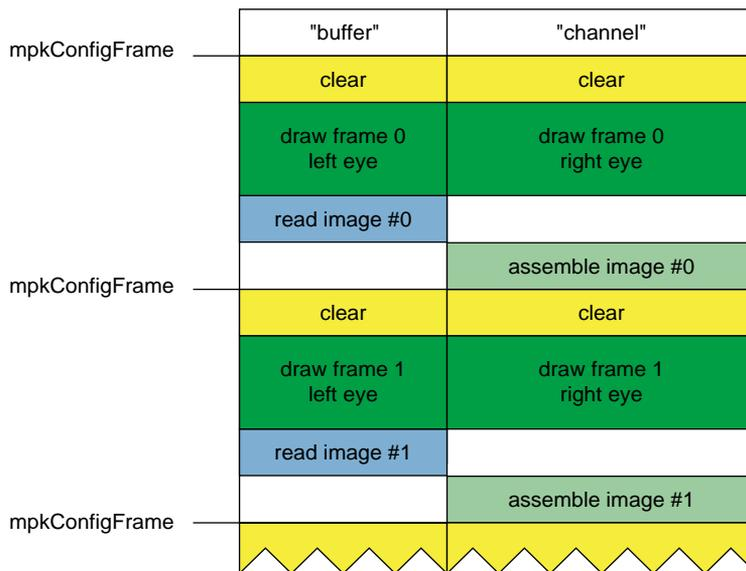


Figure 3-9 The Execution of an EYE or HMD Compound

By adding the mode flag `ASYNC`, the frame rate can be improved because of the lower consumption of graphics I/O, as shown in Figure 3-10. Note that the `ASYNC` configuration has a latency of one.

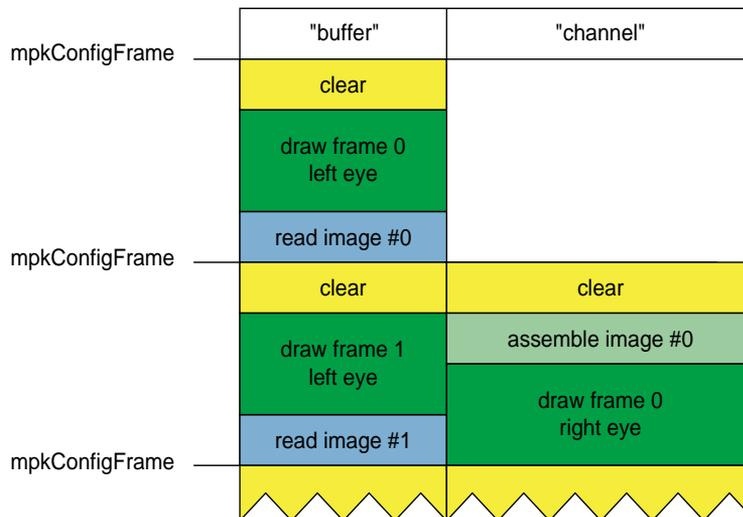


Figure 3-10 The Execution of an EYE or HMD ASYNC Compound

Temporal Decomposition

In contrast to frame decomposition, where the focus of load balancing is on dividing the frame into regions, temporal decomposition balances the workload by scheduling the work on each pipe in sync with that of the other pipes to produce a steady stream of rendered frames. The time scheduling rather than the frame division is the focus. There are two types of temporal decomposition: frame multiplexing and data streaming. The work done by each pipe largely distinguishes the two.

Frame Multiplexing

Frame multiplexing (also referred to as DPLEX decomposition) distributes entire frames to the source pipes over time for parallel processing. The first pipe begins rendering frame 1; a specified fraction of a frame later the second pipe begins rendering frame 2; another fraction of a frame later the third pipe begins rendering frame 3; and so on for all of the pipes.

Figure 3-11 illustrates frame multiplexing on a four-pipe system.

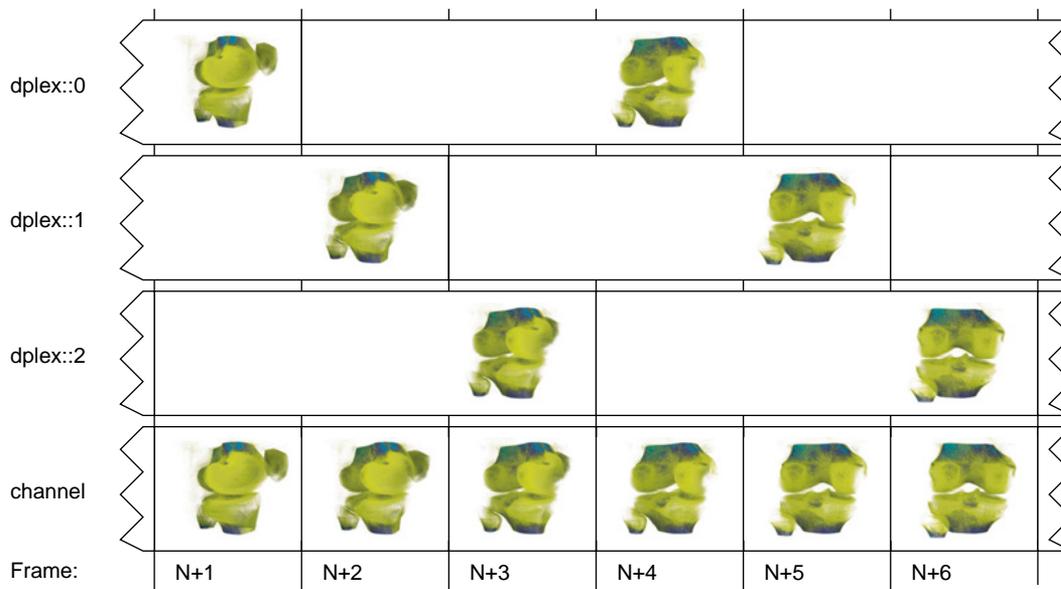


Figure 3-11 Frame Multiplexing Decomposition

Frame multiplexing globally scales geometry and pixel fill performance, as the workload balance between pipes is intrinsically maintained. This scheme has an increased transport delay inherent to frame synchronization required across the pipes. It produces a latency of $(pipes - 1)$ frames—that is, there will be a $(pipes - 1)$ frames delay between a user input and the corresponding output frame.

Frame multiplexing can also be accelerated in hardware using the SGI Scalable Graphics Compositor, which connects pipes together with a bus, thereby avoiding the image readbacks from the contributing pipes. The pipes are daisy-chained to achieve reduced latency. For more details, see “Hardware Compositing” in Chapter 5.

Example 3-5 shows the configuration file specifications for frame multiplexing decomposition illustrated in Figure 3-11.

Example 3-5 DPLEX Compound in a Configuration File

```
compound {  
    mode    [ DPLEX ]  
    channel "channel"  
  
    region {  
        channel "dplex::0"  
    }  
  
    region {  
        channel "dplex::1"  
    }  
  
    region {  
        channel "dplex::2"  
    }  
}
```

Figure 3-12 shows how the configuration in Example 3-5 executes.

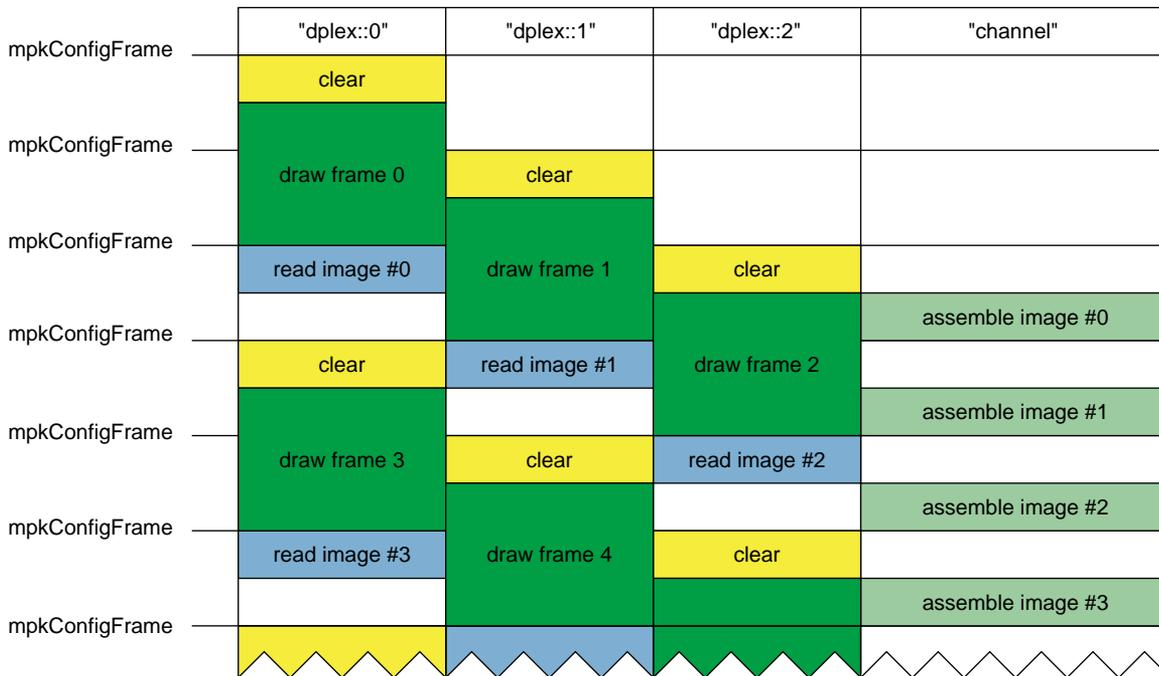


Figure 3-12 The Execution of a DPLEX Compound

By adding the mode flag `ASYNC`, the frame rate can be improved because of the lower consumption of graphics I/O, as shown in Figure 3-13. Note that the `DPLEX ASYNC` configuration has a latency of *pipes* frames while the `DPLEX` configuration has a latency of $(pipes - 1)$ frames.

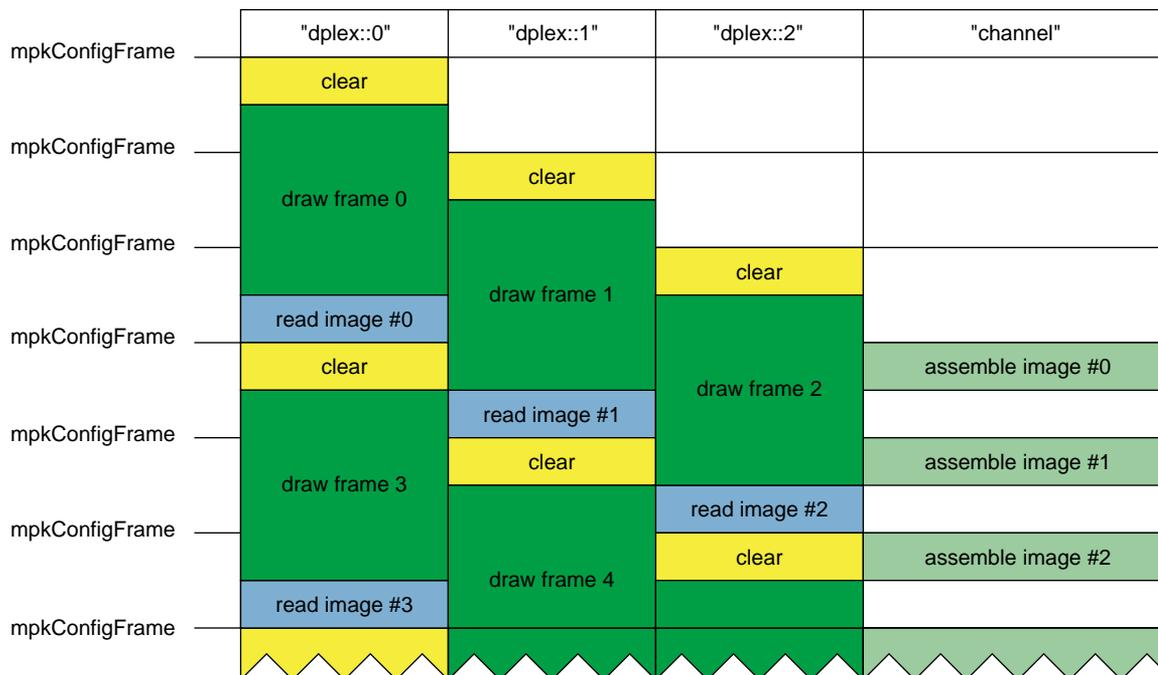


Figure 3-13 The Execution of a DPLEX ASYNC Compound

Data Streaming

Data streaming (also referred to as 3D decomposition) is similar to database decomposition in that it allows the application to divide the scene among multiple pipes and then composite the partial results to give the final rendering. But, in this case, the composition is done using a series of successive compounds for each frame, as shown in Figure 3-14. For frame $N+1$, channel `stream : 1` draws the first quarter of the database, which is copied to channel `stream : 2` at the beginning of the next frame. During frame $N+2$, channel `stream : 2` draws the second quarter of the database on top while channel `stream : 1` starts a new frame. At frame $N+4$, the destination channel `channel` finishes drawing the last quarter and displays the frame started three time steps ago.

Like DPLEX decomposition, this scheme also has a latency of $(pipes - 1)$ frames—that is, there will be a $(pipes - 1)$ frames delay between a user input and the corresponding output frame. As shown in Figure 3-14, this latency is due to successive compounds at each frame. You must wait for $(pipes - 1)$ frame computations before the final rendering

is displayed. Each compound needs to read only one source image. Consequently, this keeps graphics I/O consumption low while performance scaling is achieved by pipelining the rendering in parallel across the pipes.

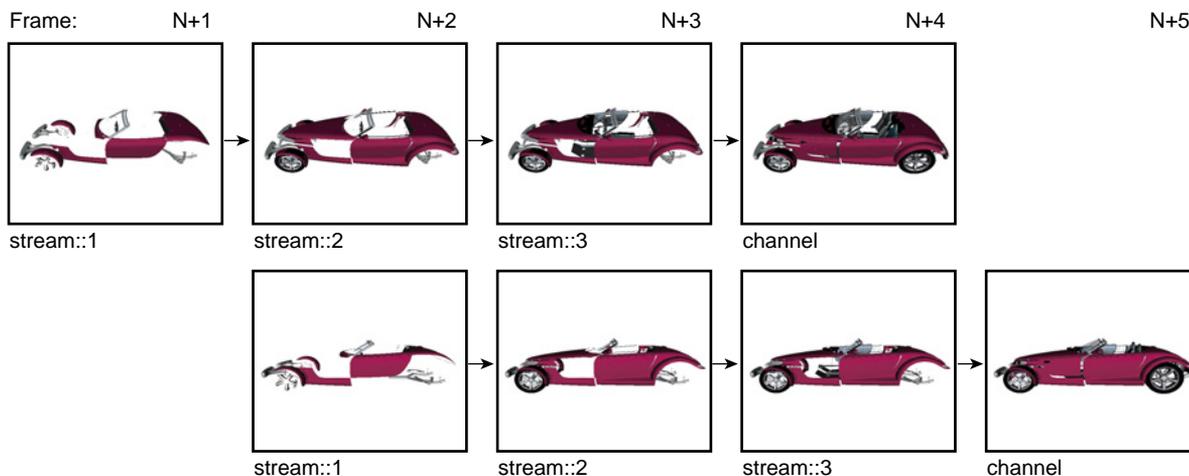


Figure 3-14 Data Streaming Decomposition

As shown in Example 3-6, the configuration file specification for a data streaming decomposition is similar to that for database decomposition.

Example 3-6 Data Streaming Compound (3D) in a Configuration File

```
compound {
    mode      [ 3D ]
    format    [ COLOR DEPTH ]
    channel   "channel"

    region {
        range      [ .0 .25 ]
        channel     "stream::1"
    }

    region {
        range      [ .25 .5 ]
        channel     "stream::2"
    }
}
```

```
    region {
        range      [ .5 .75 ]
        channel    "stream:3"
    }

    region {
        range      [ .75 1. ]
        channel    "channel"
    }
}
```

In order to support this decomposition scheme, the application has to use the `range` field to draw the correct part of the database in the `MPKChannel`'s update draw callback. The range can be acquired using `mpkChannelGetRange()`. Some applications, such as volume rendering, may want to use a different recomposition technique than MPK's default procedure. The later section "Compound-Specific Callbacks" explains how to use custom assemble-compound callbacks.

Figure 3-15 shows how the configuration for Example 3-7 executes. Data streaming compounds always assemble before drawing; therefore, the `ASYNC` flag is ignored.

| | "stream::1" | "stream::2" | "stream::3" | "channel" |
|----------------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|
| mpkConfigFrame | clear | | | |
| | draw frame 0 first quarter | | | |
| | read image #0 | | | |
| mpkConfigFrame | clear | | | |
| | draw frame 1 first quarter | assemble image #0 | | |
| | read image #1 | draw frame 0 second quarter | | |
| | | read image #2 | | |
| mpkConfigFrame | clear | clear | clear | |
| | draw frame 2 first quarter | assemble image #1 | assemble image #2 | |
| | read image #3 | draw frame 1 second quarter | draw frame 0 third quarter | |
| | | read image #4 | read image #5 | |
| mpkConfigFrame | clear | clear | clear | clear |
| | draw frame 3 first quarter | assemble image #3 | assemble image #4 | assemble image #5 |
| | read image #6 | draw frame 2 second quarter | draw frame 1 third quarter | draw frame 0 fourth quarter |
| | | read image #7 | read image #8 | read image #9 |
| mpkConfigFrame | clear | clear | clear | clear |
| | draw frame 4 first quarter | assemble image #6 | assemble image #7 | assemble image #8 |
| | read image #10 | draw frame 3 second quarter | draw frame 3 third quarter | draw frame 1 fourth quarter |
| | | read image #11 | read image #12 | read image #13 |
| mpkConfigFrame | | | | |

Figure 3-15 The Execution of a 3D Compound

Pixel-Based Decomposition

In pixel-based decomposition, a frame is rendered using a multipass approach where single passes are assigned to individual source pipes for rendering. Assembling each frame using accumulation techniques constitutes the final rendering. Accumulation of the frames can be achieved using one of the following techniques:

- The SGI Scalable Graphics Compositor
- OpenGL accumulation
- OpenGL blending

In order to use OpenGL accumulation, you must use an appropriate visual; otherwise, MPK uses blending.

Full-Scene Antialiasing (FSAA) Decomposition

MPK has implemented one scheme of pixel-based decomposition, a full-scene antialiasing (FSAA) compound. Each pipe renders the full scene from a slightly different viewpoint. The number of rendering passes of a FSAA compound is defined by its number of sources. Furthermore, every channel can thereby be used multiple times. This type of decomposition is used when the the resulting output quality has highest priority. The scalability and final rendering quality depends on the number of available pipes.

FSAA Compound Examples

Example 3-7 shows an FSAA compound using the SGI Scalable Graphics Compositor:

Example 3-7 Four-Pipe 4x FSAA Compound Using the SGI Scalable Graphics Compositor

```
compound {
    mode      [ FSAA HW NOCOPY ]
    channel  "channel-0"

    # The number of sources defines the FSAA mode
    region {
        channel "channel-0"
    }
    region {
        channel "channel-1"
    }
    region {
```

```
    channel "channel-2"  
  }  
  region {  
    channel "channel-3"  
  }  
}
```

Figure 3-16 illustrates the advantage of using a 4x FSAA solution.

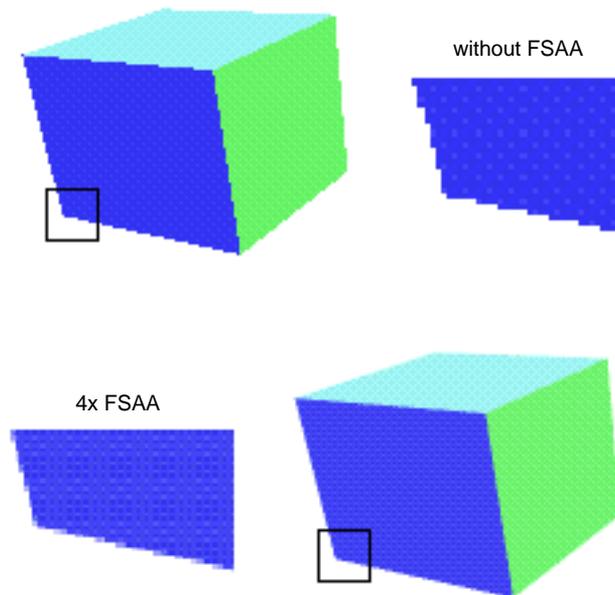


Figure 3-16 4x FSAA Decomposition

Example 3-8 shows how to use the same channel multiple times as a source channel to support multipass rendering in MPK on machines with only a few pipes.

Example 3-8 Multiple Use of a Single Channel in FSAA Decomposition

```
compound {
    mode    [ FSAA ]
    channel "channel"

    # The number of sources defines the FSAA mode
    region {
        channel "channel"
    }
    region {
        channel "channel"
    }
    region {
        channel "channel"
    }
    region {
        channel "channel"
    }
}
```

Cull Decomposition

Cull decomposition is different from the other decomposition modes in that it does not decompose the rendering of a frame. Instead, it decomposes (parallels) the cull and draw operations. Naturally, the use of this feature in the configuration file requires the application also to support the cull decomposition mode (see Chapter 4, "Culling").

In cull decomposition, the regions specify the operation to be executed by this region. Example 3-9 shows a cull decomposition for a single channel.

Example 3-9 A Simple Cull Decomposition

```

config
{
    name      "1-window"

    pipe
    {
        window
        {
            name      "MPK: simple"
            viewport  [ 0.25, 0.25, 0.5, 0.5 ]

            channel
            {
                name      "channel"

                wall
                {
                    bottom_left  [ -.5, -.4, -1 ]
                    bottom_right [  .5, -.4, -1 ]
                    top_left     [ -.5,  .4, -1 ]
                }
            }
        }
        window
        {
            attributes { hints { drawable none } }
            channel    { name      "cull" }
        }
    }

    compound
    {
        mode [ CULL ]
        channel "channel"

        region { cull channel "cull" }
        region { draw channel "channel" }
    }
}

```

In this example, the channel `cull` executes the culling concurrently with the draw operation of channel `channel`. It is defined on a window that has no drawable, because it is not used for any draw operation. You can add the `ASYNC` flag to force the cull region to process data for the frame `N`, and the draw region to draw frame `N-1`. This introduces an additional frame of latency, but potentially increases performance.

The `region` operation can be the value `cull`, `draw`, or `cull-draw`. The default operation is `cull-draw`; that is, all source channels first execute the cull operation and then the draw operation.

If multiple regions of a cull compound execute the same operation (`cull` or `draw`) for the destination channel, they process the data in parallel and, therefore, may speed up the operation if enough resources are available. As a feature of the MPK implementation, the distribution of the cull and draw tasks is automatically load-balanced. For recomposition of multiple draw or `cull-draw` regions, MPK uses by default the same algorithm that is used for DB compounds.

Note: Since culling is application-specific, you must determine (perhaps, from your application vendor) what MPK features and configurations are supported by your application.

It is possible to further decompose the regions of a cull compound, as described in the following section, “Multilevel Decomposition”

Multilevel Decomposition

MPK allows you to combine the various decomposition schemes to fix performance bottlenecks that differ in nature. For example, a combined solution can use a database and temporal decomposition scheme for optimizing performance (but it will have a limiting transport delay) or can use an eye and database decomposition scheme for stereo volume rendering.

Figure 3-17 shows a four-pipe solution using an eye and database decomposition scheme.

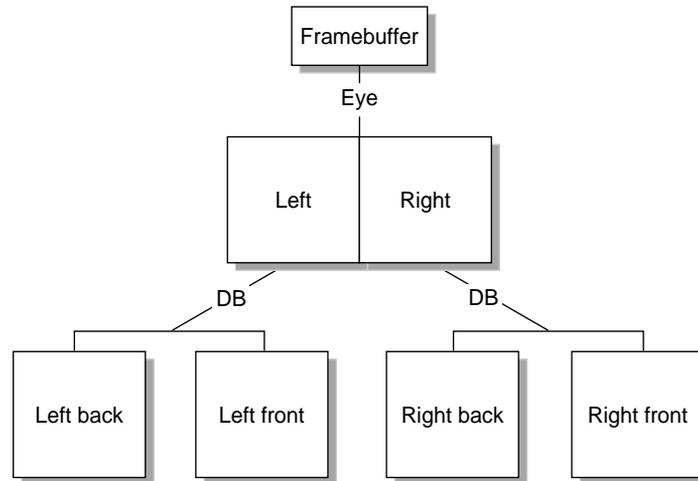


Figure 3-17 Eye-DB Multilevel Decomposition

Example 3-10 shows the configuration file specifications for the multilevel decomposition illustrated in Figure 3-17.

Example 3-10 Multilevel Compound in a Configuration File

```
compound {
  mode    [ EYE ]
  channel "right-front"

  region {
    eye    LEFT
    compound {
      mode    [ DB ]
      channel "left-front"

      region {
        range [ 0., .5 ]
        channel "left-back"
      }

      region {
        range [ .5, 1. ]
        channel "left-front"
      }
    }
  }

  region {
    eye    RIGHT
    compound {
      mode    [ DB ]
      channel "right-front"

      region {
        range [ 0., .5 ]
        channel "right-back"
      }

      region {
        range [ .5, 1. ]
        channel "right-front"
      }
    }
  }
}
```

Stereo-Selective Compounds

In many instances, it will be desirable to control which compounds will be used by the application based on whether the application is running in stereo mode. MPK provides a mode parameter for this purpose. For instance, if the application is to run in stereo mode, you may want to use eye decomposition and when in mono mode, to use another type of decomposition. Example 3-11 illustrates this conditional use of compounds.

Example 3-11 Stereo-Selective Compounds

```
compound {
  mode      [ EYE STEREO ]
  channel   "channel"

  region {
    eye      LEFT
    channel  "buffer"
  }
  region {
    eye      RIGHT
    channel  "channel"
  }
}

compound {
  mode      [ 2D MONO ]
  channel   "channel"

  region {
    viewport [ 0., 0., 1., .5 ]
    channel  "buffer"
  }

  region {
    viewport [ 0., .5, 1., .5 ]
    channel  "channel"
  }
}
```

The MONO and STEREO flags allow you to specify different channel decompositions depending on the current configuration mode. This is especially useful for eye decomposition. In this example, when the destination channel is in stereo mode, MPK uses the eye decomposition. When the destination channel is in mono mode, MPK uses the 2D decomposition.

Automatic Load Balancing for Compounds

Achieving an ideal decomposition among the children of a compound can be difficult, since the workload per child often changes on a per-frame basis. To address this problem, MPK provides automatic load balancing for 2D, DB, and 3D compounds.

This section describes the following topics:

- “Dynamic and Static Load Balancing”
- “Proper Environment for Automatic Load Balancing”
- “How to Enable Automatic Load Balancing”
- “Using a Split-Axis Method for Tiling”

Dynamic and Static Load Balancing

Figure 3-18 contrasts dynamic and static load balancing for a 2D compound using `volview`. Volume rendering is bound by fill rate; therefore, the load balancing can adjust the compound’s region so that each pipe has approximately the same amount of volume to rasterize. When using static tiling, one pipe may have to render the whole volume as it is moved around. Since the slowest child dictates overall performance, the frame rate is better, in this case, when using load balancing.

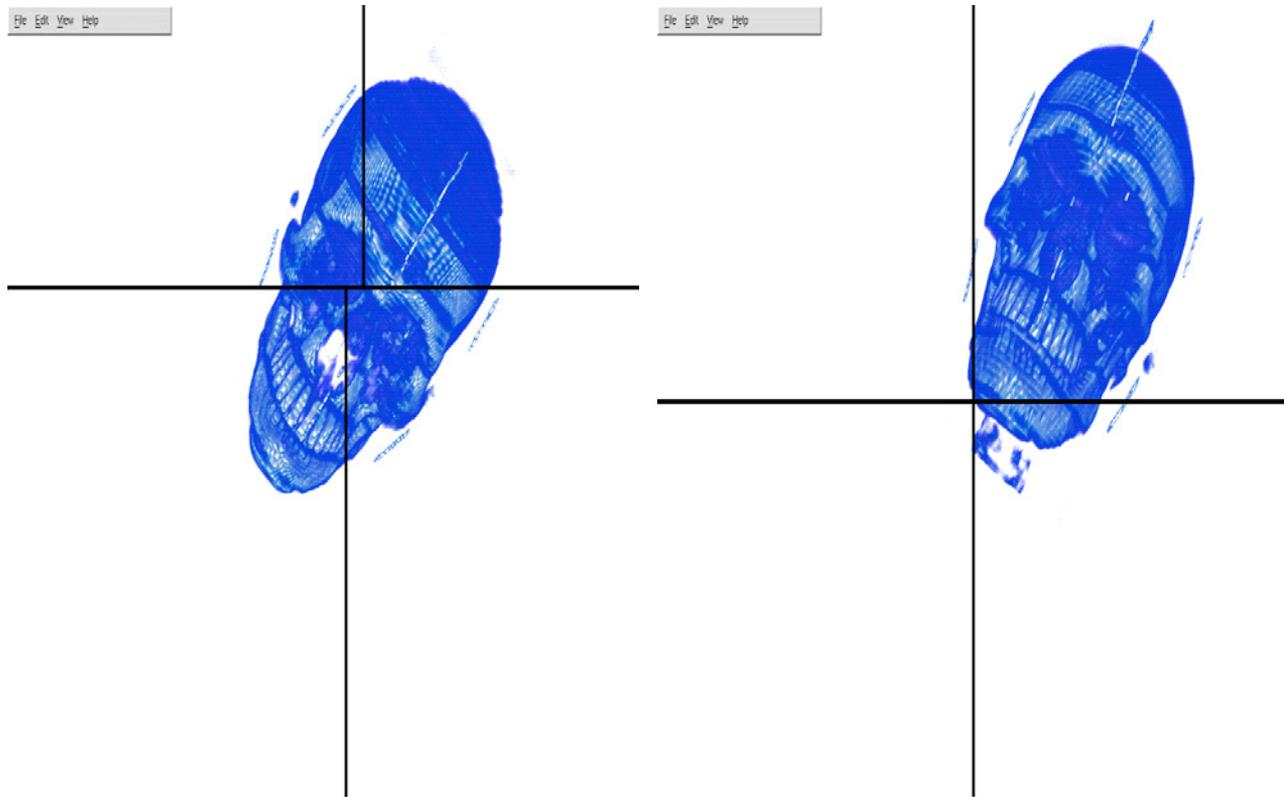


Figure 3-18 Dynamic Versus Static Load Balancing

Proper Environment for Automatic Load Balancing

Using the rendering times for each child, MPK computes a new viewport or range each frame. This approach needs the following conditions to work properly:

| Condition | Description |
|-------------|--|
| Low latency | A new workload can only be computed after all children have drawn. Therefore, the higher the latency, the higher the difference will be between the frame which is used to compute the new balance and the frame for which the balance is computed. Logically, high latency is counterproductive in achieving proper load balancing. |

| | |
|----------------------------|---|
| Frame consistency | Since the new viewport or range is computed based on the last finished frame but applied to the next frame, the two frames should be similar. This is true for most applications. |
| Scalable compound mode | The chosen decomposition mode has to solve the application's bottleneck. For example, load balancing a 2D compound for a geometry-limited application will fail, unless this application uses view-frustum culling. |
| Imbalance in decomposition | If the decomposition is already well-balanced—for example, for a DB compound—the static compound may provide a better frame rate. |

How to Enable Automatic Load Balancing

In the configuration file, you can use the `ADAPTIVE` mode flag for a compound to enable load balancing. This mode flag can be used for 2D, DB, and 3D compounds. 2D compounds will use tiles, while DB and 3D compounds will adapt the z-axis range to decompose the rendering. The next section describes how you use a split-axis method to determine tiling schemes and z-axis splits.

Note: If you do not provide a tiling scheme (or z-axis split) for `ADAPTIVE` mode, MPK creates one.

Using a Split-Axis Method for Tiling

As the name implies, a split-axis method uses splits on the Cartesian coordinate axes to determine tiling schemes (or z-axis range splits). As noted in the preceding section, the tiling schemes are specific to 2D compounds and z-axis splits, to DB and 3D compounds.

You specify a split in the configuration file by using the `split` field of the compound data structure. The *SGI OpenGL Multipipe SDK User's Guide* describes the formal syntax for the `split` field. This section provides several examples of how to use the field. Example 3-12 shows a tiling scheme for a 2D compound with four regions (source channels) defined.

Example 3-12 2D Tiling Scheme with Four Regions and Horizontal Tiles

```
split "[[1 | 2] - [3 | 4]]"
```

Note the following syntax items and other restrictions:

- The `split` value is a string.
- MPK uses the following operators in the string to denote the axis-specific splits:

| Splits the x axis.

- Splits the y axis.

/ Splits the z axis.

The operators | and - can be used only with 2D compounds and /, only with DB and 3D compounds.

- Integers represent the regions in the `compound` data structure in the order of declaration. All regions declared in the compound must appear in the `split` string.
- A set of brackets must enclose a split, which can be nested in another split (as shown in Example 3-12).

Figure 3-19 illustrates the tiling scheme specified in Example 3-12.

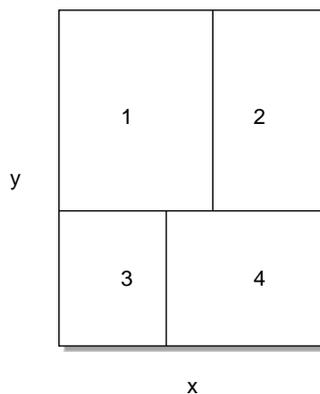


Figure 3-19 2D Tiling Scheme with Four Regions and Horizontal Tiles

Example 3-13 , like Example 3-12, shows a tiling scheme for a 2D compound with four regions, but this time the primary split is on the x axis.

Example 3-13 2D Tiling Scheme with Four Regions and Vertical Tiles

```
split "[[1 - 2] | [3 - 4]]"
```

Figure 3-20 illustrates the tiling scheme specified in Example 3-13.

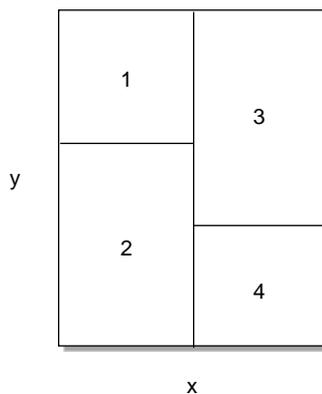


Figure 3-20 2D Tiling Scheme with Four Regions and Vertical Tiles

If you do not specify a split, MPK will automatically create one.

Choosing the Right Decomposition Mode

There are no hard and fast rules for choosing the correct decomposition scheme, but the following are some general guidelines to aid you in selecting a reasonable scheme for your environment:

| Mode | Recommended Use |
|-------|---|
| 2D | Use this scheme if your application is fill-limited. You can also scale geometry performance and texture memory if your application is using view-frustum culling techniques. |
| 3D | Use this scheme where you would normally use the DB scheme but where you experience scalability problems caused by a graphics I/O bottleneck on the destination pipe. For 3D decomposition, the graphics I/O per pipe is constant when changing the number of contributing pipes. Unlike the DB scheme, however, adding pipes to a 3D compound increases latency. |
| DB | Use this scheme when your application's frame rendering can be sequenced into equally consuming phases. This requires the application to divide your scene into multiple components and then to composite them correctly. Scalability here can be either on fill, geometry, or graphics resources (texture) depending on the application. |
| FSAA | Use this scheme if graphics quality is a primary concern. |
| EYE | Use this scheme for stereo viewing. |
| DPLEX | Use this scheme for general load balancing where the application maintains a reasonably steady frame rate. |

Note: With the DB and 3D modes, the application must support the feature.

These are very high-level guidelines that may very well overlap. As noted in the section "Multilevel Decomposition" on page 78, you can combine the various decomposition modes to fix different performance bottlenecks.

Compound-Specific Callbacks

This section describes how to customize the compound processing using the callbacks provided by the `MPKCompound` data structure.

This section has the following subsections:

- “Optimizing Frame Transport”
- “Custom Assembly”
- “Traversing Compounds”

Optimizing Frame Transport

The adaptive readback interface enables the specification of a subviewport of a compound’s input channel to be read back, transported, and assembled during compound operations.

This subviewport usually corresponds to the portion of the channel that was drawn during the last update-channel draw callback and, therefore, enables the optimization of pixel transfers for this channel.

The default `mpkCompoundReadOutputFrame()` callback basically reads the full channel’s viewport by using `mpkChannelReadFrame()` on the handle returned by `mpkCompoundGetOutputFrame()`. A customized version of this callback, as shown in Example 3-14, typically uses only the channel subportion transported by user data.

Example 3-14 A Custom Read-Output Compound Callback

```
void readOutputFrame( MPKCompound *compound )
{
    MPKChannel    *c;
    ChannelData  *channelData;
    MPKFrame     *frame;

    c = mpkCompoundGetChannel( compound );

    frame = mpkCompoundGetOutputFrame( compound );

    // get the effectively drawn region computed in updateChannel
    channelData = ( ChannelData* )mpkChannelGetUserData( c );
```

```
        mpkChannelReadFrame( c, frame, channelData->region );  
    }
```

The example `flip.adaptiveRB` computes the screen area covered by the scene in the update-channel draw callback in order to optimize the frame transport using the read-output callback. The read-output compound callback for the MPKConfig can be set using `mpkConfigSetCompoundReadOutputCB()`.

Custom Assembly

The purpose of the custom MPKCompound interface is to allow customization of the MPKCompound pre- and post-assembly passes.

Upon the `mpkConfigFrame()` invocation, each MPKWindow thread traverses the configuration's compound tree[s] and updates each compound whose channel belongs to the window. If the compound is a leaf node, then MPK invokes the user-specified clear and update callbacks on the associated [source] channel. Otherwise, if the compound is not a leaf node, then MPK assembles the frames output from the compound children into its associated [destination] channel.

This traversal actually occurs in several passes. Figure 3-21 shows the update of one window as in Figure 2-4 on page 29, but here Figure 3-21 shows the necessary callbacks for compound processing. A complete update for one channel consists of the following actions:

1. Invoke update clear callback if this channel is used as source.
2. Invoke pre-assemble callback if this channel is used as destination.
3. Invoke update draw callback if this channel is used as source.
4. Invoke post-assemble callback if this channel is used as destination.

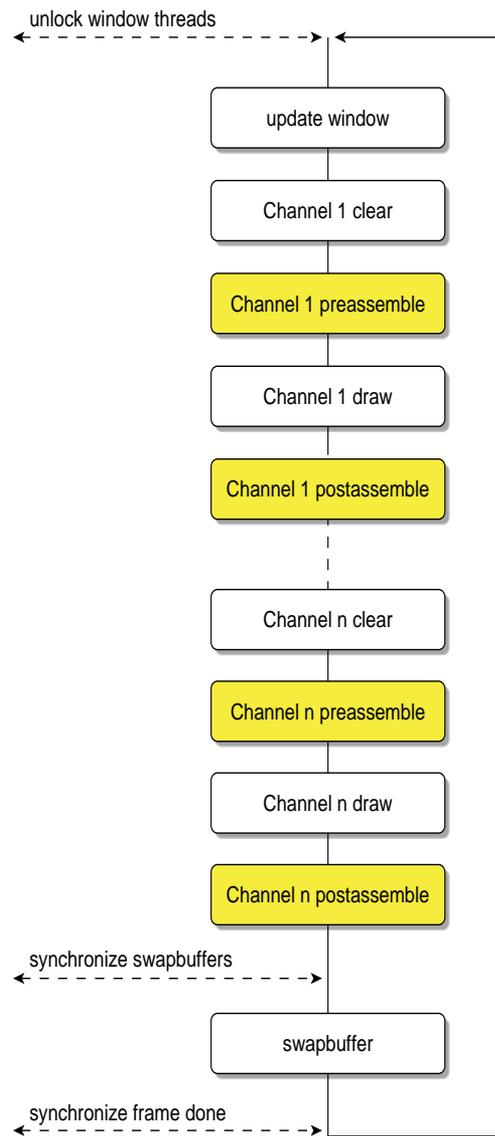


Figure 3-21 A Detailed Window Update

Neither the pre- nor post-assemble callback is invoked if any of the following conditions are true:

- The compound channel is `NULL`.
- The compound channel's window is frozen.
- The compound latency is greater than current frame number (initial countdown).

A channel can be used as source and destination at the same time, it may even be used more than once as a source channel. In that case, each callback may be invoked more than once during a frame.

The default pre- and post-assemble callback perform the following tests in order to determine if they should perform any assembly:

- The compound mode is not `NOCOPY`.
- The compound has input frames—that is, is a destination channel.

If one of these tests fail, they do not assemble. In addition, **`mpkCompoundPreAssemble()`** tests that the `ASYNC` flag is set. Then the images output from the source channels during last frame are assembled in the destination channel prior to any rendering. Likewise, **`mpkCompoundPostAssemble()`** tests that the `ASYNC` flag is not set. Then the images from the source channels are assembled in the destination channel during the same frame as soon as they have been produced.

By overriding the default assemble callbacks, the application can customize the way frames are assembled in the destination channel. This technique is used, for example, in volume rendering, where the input frames are assembled in a fixed order using special blending modes.

Note that if the compound channel is identical to its parent channel, then no output frame is generated for this compound.

Traversing Compounds

The MPKCompound data structure is a container for children of MPKCompound, each associated with an existing MPKChannel. The resulting MPKCompound tree can be traversed using the following three functions:

| Function | Description |
|-------------------------------------|--|
| mpkCompoundTraverseAll() | Traverses all children of the specified MPKCompound, regardless of any state information. |
| mpkCompoundTraverseActive() | Traverses the active children of the passed MPKCompound with respect to the current stereo mode (see the previous section “Stereo-Selective Compounds”). |
| mpkCompoundTraverseCurrent() | Only traverses the active and current children of the passed MPKCompound with respect to the current stereo mode and current DPLEX cycle. |

They provide a general mechanism for traversing a compound hierarchy in a top-to-bottom, left-to-right order. Figure 3-22 shows the traversal for the MPKCompound tree of the used in Example 3-10 in the previous section “Multilevel Decomposition”.

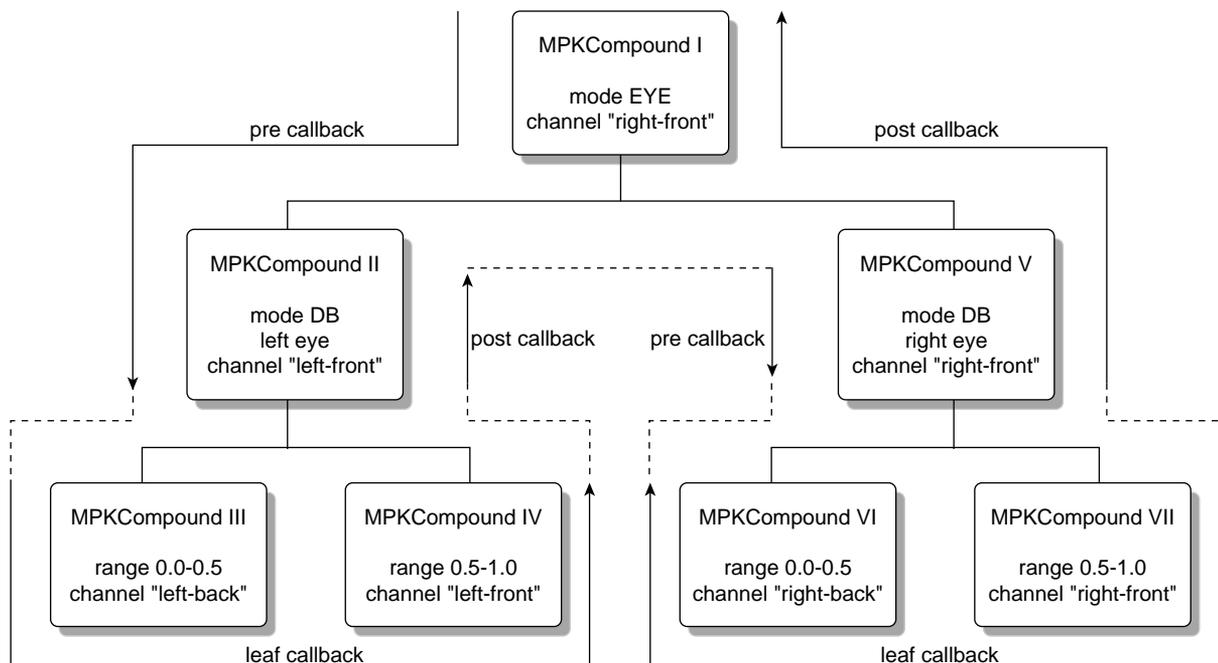


Figure 3-22 MPKCompound Traversal

The traversal functions are using three types of callbacks during traversal:

| Callback Type | Description |
|-------------------------|---|
| Leaf callback function | Applied only on the leaf nodes of the compound tree, that is, on compounds without any children (in Figure 3-22, compounds III, IV, VI, and VII). |
| Pre-callback functions | Applied when traversing parent compounds downwards. In Figure 3-22, they apply to the compounds I, II, and V. |
| Post-callback functions | Applied when traversing parent compounds upwards. In Figure 3-22, they apply to the compounds I, II, and V. |

The return values of these functions must be either `MPK_TRAV_CONT`, `MPK_TRAV_PRUNE`, or `MPK_TRAV_TERM` to indicate that the traversal should continue, skip this node, or terminate, respectively. The value `MPK_TRAV_PRUNE` is equivalent to `MPK_TRAV_CONT` for the post-callback function.

Culling

Chapter 2, “The MPK Programming Model”, describes a simple MPK program. This chapter describes how MPK supports the implementation of culling.

The typical single-pipe application executes culling either in a separate thread or does the culling on-the-fly while the database is rendered. In addition, multipipe applications may execute culling on different levels within a compound tree. This makes possible a number of culling configurations for a given rendering setup.

This chapter has the following two sections:

- “Configuring” on page 95 explains how the different culling schemes can be specified using the `config` file format or the MPK API.
- “Data Handling” on page 98 describes how to unlock the full flexibility of MPK’s culling infrastructure.

Configuring

Each compound in MPK has an operation mode which defines if it should execute draw, cull, or cull and draw operations. If unspecified, this mode is inherited from the parent or is cull-draw (cull and draw) for the topmost compound.

In order to update the 2D decomposition shown in Figure 4-1, MPK will invoke first the update cull callback and then the update draw callback on the channels “buffer” and “destination”.

Note: If culling should be disabled, the operation mode of the top-level compound simply has to be set to `draw`, which will be inherited by all children.

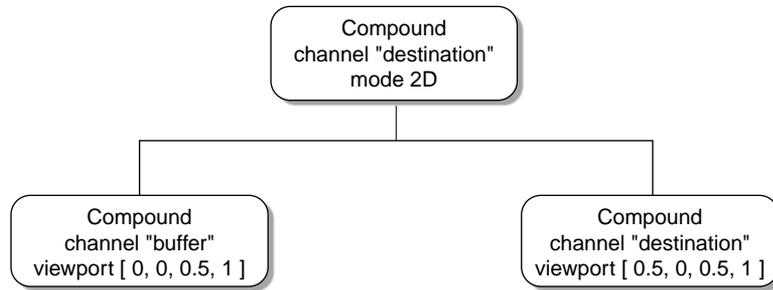


Figure 4-1 Compound Tree for a 2D Decomposition

Because the same channel executes the cull and draw operation, the execution of the tasks is serialized. A cull compound can be used to parallel the cull and draw operation. Note that channels used only for culling typically reside on a window having no drawable; that is, the window attribute `hint drawable` is set to `none`. Using parallelized culling for both source channels, Figure 4-2 shows the decomposition from Figure 4-1.

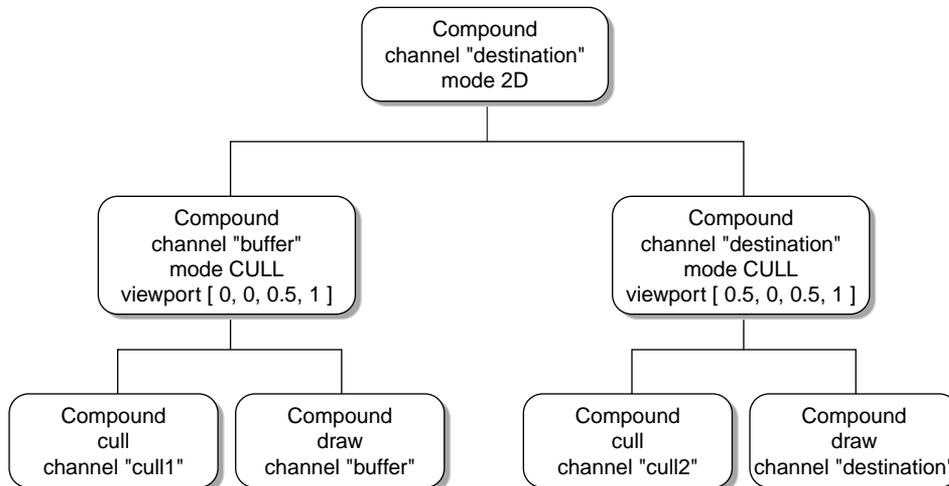


Figure 4-2 Compound Tree for 2D Decomposition with Parallel Culling

Children of a cull compound decompose the cull and draw task. In the given example, channel `"cull1"` executes the culling for channel `"buffer"`, which executes only the draw

operation. The `ASYNC` flag can be used on cull compounds to execute the culling asynchronously from the drawing. This introduces one additional frame of latency, because the cull regions process frame `N` while the draw regions render frame `N-1`.

If the system has enough resources, it may be desirable to first cull the data for the destination view and then redefine culling on each source channel. This can be done using a cull compound to decompose the destination compound. Figure 4-3 shows the tree for the 2D configuration.

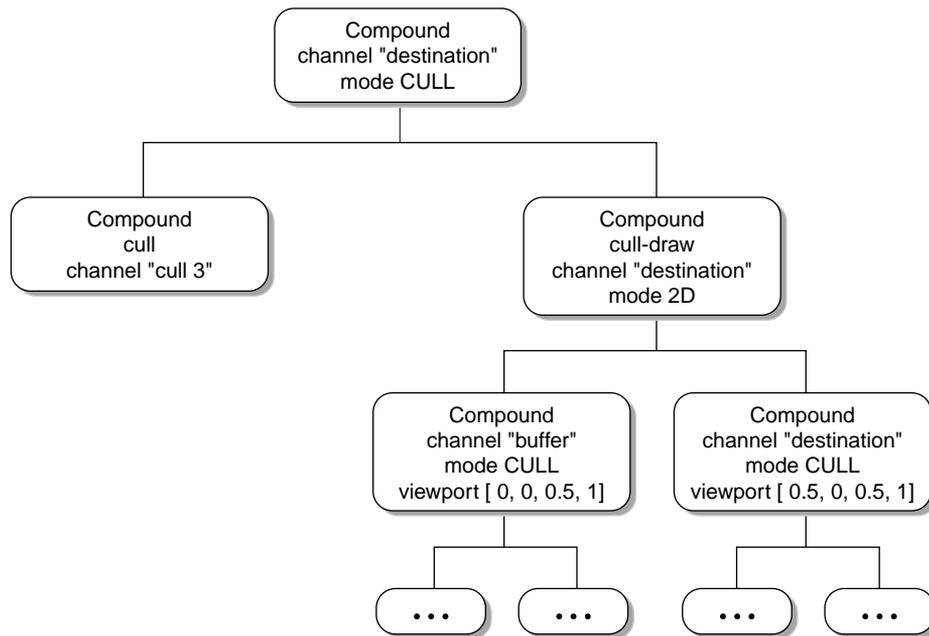


Figure 4-3 Compound Tree for 2D Decomposition and Multilevel Culling

When this configuration is updated, channel `"cull3"` first culls the whole database, and the result is culled again by channels `"cull1"` and `"cull2"` for the appropriate sub-frustum.

The culling for a single channel can be decomposed across multiple cull threads by specifying multiple cull regions using different channels, as shown in Figure 4-4.

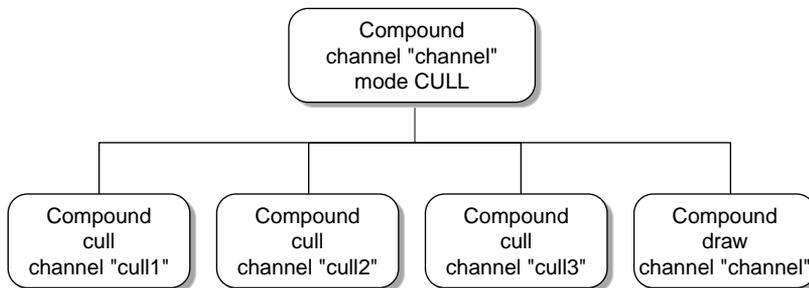


Figure 4-4 Multiple Cull Threads for a Single Channel

When the data handling API (described in the next section) is used, MPK distributes the data appropriately across the cull regions. Otherwise, it is the application's responsibility to do the correct data passing.

The cull compound can also be used to decompose the drawing across multiple draw regions. The recomposition uses the same algorithm as for database decomposition.

Data Handling

MPK provides functions to facilitate data passing between the individual cull and draw operations. You describe the frame from the application thread. To do so, decompose **mpkConfigFrame()** into **mpkConfigFrameBegin()** and **mpkConfigFrameEnd()**. Between the latter two calls, describe the scene using **mpkConfigFrameData()**, as outlined in Example 4-1.

Example 4-1 Describing the Data Used for a Frame

```

while( !exit )
{
    // update database
    ...
    mpkConfigFrameBegin( config, framedata );

    // send database
    mpkConfigFrameData( config, data1 );
    ...
    mpkConfigFrameData( config, dataN );

    mpkConfigFrameEnd( config )
}

```

MPK distributes this data to the topmost cull or draw processes in the configuration. You can retrieve the data using **mpkChannelNextData()** and **mpkChannelCheckData()**. Cull callbacks can pass the visible data to further cull or draw callbacks using **mpkChannelPassData()**, as outlined in Example 4-2.

Example 4-2 A Simple Cull Callback

```

void cullChannel( MPKChannel *channel, void *data )
{
    // get frustum to cull against
    float frustum[6], xfm[16];

    mpkChannelGetFrustum( channel, frustum, xfm );

    // apply application-specific view
    ...

    // cull all data
    MPKFrameData *data;
    while( (data = mpkChannelNextData( channel )) != NULL )
    {
        // test object[s] described in data against frustum
        ...

        if( isVisible )
            mpkChannelPassData( channel, data );
    }
}

```

For culling implementations using a hierarchical approach, the function **mpkChannelPutData()** is provided to enable better parallelization between multiple cull threads. The function **mpkChannelPutData()** puts data back to the input queue used by all cull regions of the same cull compound. A typical use is outlined in the pseudo code in Example 4-3, where the top-level bounding box is passed using **mpkConfigFrameData()**. Without using **mpkChannelPutData()**, the whole database would be processed by only one cull thread.

Example 4-3 Hierarchical Culling Using **mpkChannelPutData()**

```
void cullChannel( MPKChannel *channel, void *data )
{
    // get frustum to cull against
    float frustum[6], xfm[16];

    mpkChannelGetFrustum( channel, frustum, xfm );

    // apply application-specific view
    ...

    // cull all data
    MPKFrameData *data;
    while( (data = mpkChannelNextData( channel )) != NULL )
    {
        // test object[s] described in data against frustum
        ...

        switch( visibility )
        {
            case FULLY_VISIBLE:
                mpkChannelPassData( channel, data );
                break;

            case PARTIALLY_VISIBLE:
                foreach child of data
                    mpkChannelPutData( channel, child );
                break;
        }
    }
}
```

Finally, you must modify the update draw callback to draw the data which is passed, not the full database. In order to do so, again use **mpkChannelCheckData()** and **mpkChannelNextData()**. Example 4-4 shows pseudo code for such a callback.

Example 4-4 An Update Draw Callback Using the Cull Queues

```
void updateChannel( MPKChannel *channel, void *data )
{
    // apply frustum, transformation, OpenGL state
    ...

    MPKFrameData *data;
    while( (data = mpkChannelNextData( channel )) != NULL )
    {
        // draw object[s] described in data
        ...
    }
}
```

In order to deallocate the data passed to MPK using **mpkConfigFrameData()** or **mpkChannelPassData()**, use the MPKConfig's reference-data or dereference-data callback, set by **mpkConfigSetFrameDataRefCB()** or **mpkConfigSetFrameDataUnrefCB()**.

MPK provides the following three global attributes to tune the performance of the queues used to connect the various callbacks:

| | |
|--|---|
| <code>MPK_CONFIG_FRAME_CACHE_SIZE</code> | Defines the cache size for the MPKConfig's frame data queue, filled using mpkConfigFrameData() . |
| <code>MPK_CHANNEL_PASS_CACHE_SIZE</code> | Defines the cache size for data passed using mpkChannelPassData() . |
| <code>MPK_CHANNEL_PUT_CACHE_SIZE</code> | Defines the cache size for data passed using mpkChannelPutData() . |

Set these attributes before calling **mpkConfigInit()**. For the frame data and cull data queues, MPK uses caches to minimize locking between multiple consumers and producers. These caches impose a certain granularity for processing items.

Advanced MPK Programming

This chapter describes the following advanced topics:

- “Using an Alternate Parser”
- “Creating Configurations without a Configuration File”
- “The Idle Callback”
- “Controlling the Frame Rate”
- “Data Handling”
- “Hardware Compositing”
- “Advanced Compositing”
- “MPK and Other APIs”

Using an Alternate Parser

The MPK configuration file loader allows the specification of a preprocessor through the use of the `MPK_PARSER_CMD` environment variable. The preprocessor command will be invoked with the configuration file name as the first argument, and its output will be parsed by the normal MPK loader. Therefore, the output of this preprocessor has to be an MPK configuration file. For example, the C preprocessor can be used to put different configurations in one ASCII file and to select one using the `#define` functionality.

Creating Configurations without a Configuration File

The MPK configuration file loader is using only MPK’s exposed C functional interface. Therefore, it is possible to create configurations programmatically or even write an alternate parser. The function in Example 5-1 creates a simple one-window configuration.

Example 5-1 Creating a Configuration Programmatically

```
MPKConfig *createSimpleConfig( void )
{
    // new config
    MPKConfig *config = mpkConfigNew();
    mpkConfigSetName( config, "1-window" );

    // one pipe
    MPKPipe *p = mpkPipeNew();
    mpkConfigAddPipe( config, p );
    mpkPipeSetName( p, "pipe" );

    // one window with viewport [0.25, 0.25,0.5,0.5]
    MPKWindow *w = mpkWindowNew();
    mpkPipeAddWindow( p, w );
    mpkWindowSetName( w, "MPK: simple" );
    float vp[4] = { 0.25, 0.25, 0.5, 0.5 };
    mpkWindowSetViewport( w, vp );

    // one channel
    MPKChannel *c = mpkChannelNew();
    mpkWindowAddChannel( w, c );
    mpkChannelSetName( c, "channel" );
    vp[0]=0.0; vp[1]=0.0; vp[2]=1.0; vp[3]=1.0;
    mpkChannelSetViewport( c, vp );
    float bl[] = { -.5, -.5, -1},
           br[] = { .5, -.5, -1},
           tl[] = { -.5, .5, -1};
    mpkChannelSetWall( c, bl, br, tl );

    // mono and stereo monitor characteristics
    mpkPipeSetAttribute( p, MPK_PATTR_STEREO_TYPE, MPK_STEREO_RECT );
}
```

The Idle Callback

As described in the section “The Rendering Callbacks” in Chapter 2, the idle callback can be used to utilize the idle time in the application thread during the rendering of a frame. The exact idle time depends on a number of conditions—for example, the decomposition mode or the current viewpoint. The function **mpkConfigIsIdle()** can be used to optimize the usage of this idle time, as shown in Example 5-2.

Example 5-2 A Simple Idle Callback

```
void configIdle( MPKConfig *config )
{
    while( mpkConfigIsIdle( config ) )
    {
        // do some processing
    }
}
```

Note that no data used in the rendering callbacks should be modified in the idle callback.

Controlling the Frame Rate

MPK currently supports two timers, `MPK_TIMER_AUTO` and `MPK_TIMER_FRAME`. By default, only the `MPK_TIMER_AUTO` timer is enabled. Both timers can be enabled and disabled using the functions **mpkConfigTimerEnable()** and **mpkConfigTimerDisable()**. MPK timer values are always expressed in milliseconds.

The `MPK_TIMER_AUTO` timer is used for automatically load-balancing DPLEX compounds. Its duration, determined by MPK, is based on the rendering time of the DPLEX children and cannot be set by the application.

The `MPK_TIMER_FRAME` timer is used to control the execution time of a `MPKConfig` frame. When the timer is enabled, **mpkConfigTimerGetTime()** returns the actual duration of the last `MPKConfig` frame. The desired minimal duration for the subsequent `MPKConfig` frames can be set using the function **mpkConfigTimerSetTime()**.

MPK uses a POSIX timer to fire alarms. By default, the signal `SIGALRM` is used to deliver this signal. The function **mpkGlobalSetTimerSignal()** may be used to change this signal. When using `pthread` execution mode, the delivery of the timer signal has to be blocked

in all threads, except the application thread. Example 5-3 shows the code used by MPK to block the timer signal in all internally created threads.

Example 5-3 Blocking the Timer Signal

```
// block timer signal in this thread
if( mpkGlobalGetExecutionMode() == MPK_EXECUTION_PTHREAD )
{
    int signal = mpkGlobalGetTimerSignal();
    sigset_t set;

    sigemptyset ( &set );
    sigaddset( &set, signal );
    pthread_sigmask( SIG_BLOCK, &set, NULL );
}
```

Data Handling

MPK applications are multithreaded and may render several views and versions of the same database due to the latency imposed by some decomposition modes. Given this possibility, some types of application data have to be handled carefully. Within an MPK application, there are typically the following types of data:

- Application-only data
- Static shared data
- Dynamic shared data
- Frame data

Application-Only Data

Application-only data is only used by the application thread. Therefore, no special attention has to be paid when using this kind of data.

Static Shared Data

Static shared data is initialized before calling **mpkConfigInit()** and is used afterward only in a read-only fashion. Like application-only data, no special precautions have to be taken.

Dynamic Shared Data

Dynamic shared data is data modified during run time. Therefore, it has to be allocated using **mpkMalloc()** or **mpkCalloc()** to allocate the memory from a shared arena in `fork` execution mode. If this data is accessed for reading and writing concurrently from several threads, it has to be protected using a mutex.

Frame Data

Frame data is shared data that is characteristic to a specific frame. This can be the viewpoint, the position of dynamic parts in the scene, or lighting characteristics. This data, like dynamic shared data, has to be allocated using **mpkMalloc()** or **mpkCalloc()**. Frame data is passed from the application thread (the producer) to the rendering threads (the consumers) through the use of **mpkConfigFrame()**. MPK stores past frame data and passes it to the rendering callbacks according to the latency to be rendered by this callback. When a frame data pointer is not needed anymore, it is passed to the MPKConfig's free-data callback to be freed by the application. Due to the nature of frame data, mutual exclusion is not necessary. The application thread writes to frame data before passing it to **mpkConfigFrame()**. After it is passed to MPK, the frame data is only accessed by the rendering threads in a read-only fashion.

Hardware Compositing

MPK offers native support for compositing hardware. Eliminating the need for pixel transfers and software recomposition, this specialized hardware performs the recomposition part of an MPKCompound.

MPK provides support for the SGI Scalable Graphics Compositor. MPK handles the setup and control of the hardware by using the `GLX_SGIX_hyperpipe` API (see the `hyperpipe(3)` man page). An application written for MPK can immediately take

advantage of this hardware without having to take care of the `GLX_SGIX_hyperpipe` extension.

The mode flag `HW` is used to enable the support for `DPLEX`, `EYE`, `FSAA`, and `2D` compounds. The mode flag `NOCOPY` has to be specified to disable the pixel transfer and software recomposition.

Advanced Compositing

MPK provides two data structures to give access to the transported color, depth and stencil values during compound assembly:

- `MPKFrame`
This data structure holds a list of the color, depth, and stencil `MPKImages` for one compound child along with the region it covers in the destination channel.
- `MPKImage`
This data structure holds the pixel data along with information about the format, size, and position of this image.

`MPKFrames` for compound children can be retrieved using the function **`mpkCompoundGetAssemblyFrame()`** in the pre- and post-assembly callbacks (see the section “Custom Assembly” on page 89).

Note: The function **`mpkFrameDelete()`** should not be called on `MPKFrames` acquired using **`mpkCompoundGetAssemblyFrame()`**, since these are managed by MPK.

The `format` field of an `MPKFrame` indicates which images it contains. The `region` defines the fractional viewport covered by this frame with respect to the destination channel.

The individual `MPKImages` for each `MPKFrame` can be retrieved using **`mpkFrameNImages()`** and **`mpkFrameGetImage()`**. For assembly frames, each `MPKImage` used has a buffer allocated, which holds the pixel data for this `MPKImage`. The `format` and `type` specify the attributes of the pixel data, as described in the man page `glDrawPixels(3G)`. The size of the `MPKImage` defines the width and height of the pixel data stored in the buffer. The `offset` specifies the pixel offset with respect to the region of the parent `MPKFrame` or **`mpkChannelDrawImage()`**. If you change one parameter, you

must ensure that the other parameters (especially, the allocated buffer) are adjusted accordingly.

The final pixel viewport for one MPKImage is computed as follows:

```
width = ChannelPixelViewport[2];
height = ChannelPixelViewport[3];

// compute frame's pixel viewport
MPKImagePixelViewport[0] = MPKFrameRegion[0] * width;
MPKImagePixelViewport[1] = MPKFrameRegion[1] * height;

MPKImagePixelViewport[2] = (MPKFrameRegion[0]+MPKFrameRegion[2]) *
width;
MPKImagePixelViewport[3] = (MPKFrameRegion[1]+MPKFrameRegion[3]) *
height;

MPKImagePixelViewport[2] -= MPKImagePixelViewport[0];
MPKImagePixelViewport[3] -= MPKImagePixelViewport[1];

// clip to image size
if ( MPKImagePixelViewport[2] > MPKImageSize[0] )
    MPKImagePixelViewport[2] = MPKImageSize[0];
if ( MPKImagePixelViewport[3] > MPKImageSize[1] )
    MPKImagePixelViewport[3] = MPKImageSize[1];

// add image offset
MPKImagePixelViewport[0] += MPKImageOffset[0];
MPKImagePixelViewport[1] += MPKImageOffset[1];
```

Figure 5-1 illustrates a frame and an image within one channel.

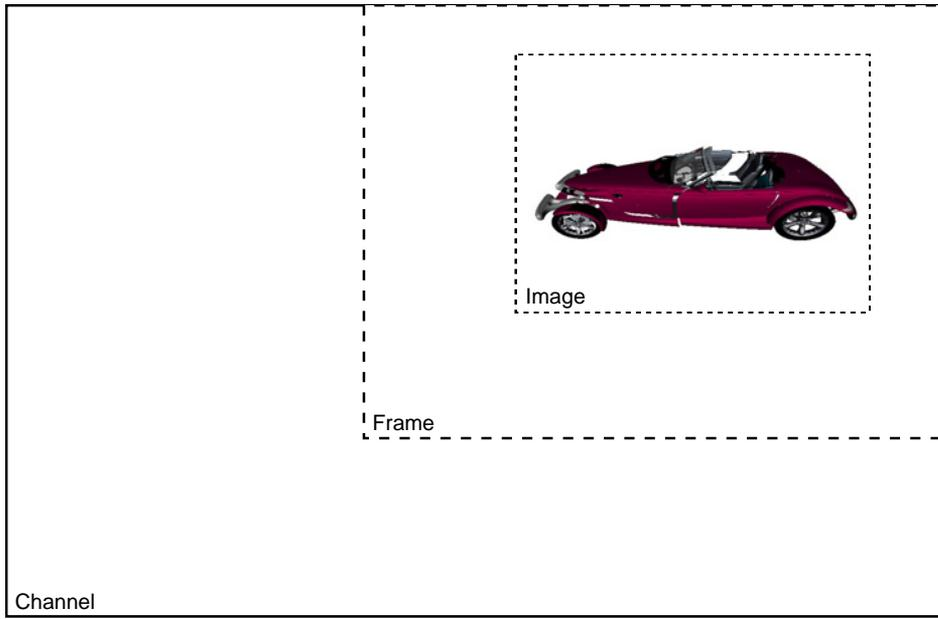


Figure 5-1 A Frame and an Image within one Channel

One possible use of this interface is to do software-based composition, as described by the following pseudo code:

```
void assembleCB( MPKCompound *compound, void *userData )
{
    //=====
    // tile assembly frames :
    //
    // assembly images may have different positions and sizes.
    // Therefore we need to extract tiles in which the number of
    // contributing images is constant. For this we simply sort
    // all input image boundaries into xDim[] and yDim[] vectors,
    // so that
    //
    // tile[i,j] = [ xDim[i], xDim[i+1]-1 ] x [ yDim[j], yDim[j+1]-1 ]

    for each assembly frame
        for each image (color, depth, stencil)

            compute image's xStart, xEnd, yStart, yEnd
```



```

        sorted-add xStart, xEnd to xDim vector
        sorted-add yStart, yEnd to yDim vector

    end for
end for

//=====
// allocate output frame and image buffers :
//
// the output frame dimensions (ie. frame origin and images size)
// corresponds to the bounding box of all tiles.
// Note that we could also allocate a vector of output tiles, and
// later perform tiled re-composition.
// Note also that the image buffers must be initialized.

    allocate output frame
    set origin to xDim[0], yDim[0]

    allocate image buffers for output frame
    set output frame images to image buffers
    set size of output images to xDim[n]-xDim[0], yDim[m]-yDim[0]

    initialize image buffer values wrt depth, color, stencil

//=====
// compose output frame :
//
// loop over all tiles (boundaries), and
//
// 1. first setup a vector of flags that is indexed by frame#
//    and imageType. Each element of the vector indicates whether
//    the corresponding image contributes to the tile.
//
// 2. then we loop over all pixel coordinates within the tile
//    and compose each assembly frame's pixel value, depending
//    on the flag for this frame and image type.

for each tile ( i, j )

    // flag image contributions for this tile

    for each assembly frame
        for each image (color, depth, stencil)

```

```
        compare xStart, yStart with tile boundaries
        set flag[frame#][imageType] accordingly

        end for
    end for

    if no image used in the tile
        continue
    end if

    // compose all contributing pixels

    for each x ( xDim[i], ... xDim[i+1]-1 )
        for each y ( yDim[j], ... yDim[j+1]-1 )

            for each assembly frame
                for each image (color, depth, stencil)

                    if !flag[frame#][imageType]
                        continue
                    end if

                    compose image.pixel( x, y ) to output
                    frame's corresponding
                    image.pixel( x-xDim[0], y-yDim[0] )

                end for
            end for

        end for
    end for
}
```

MPK and Other APIs

This section describes items to consider when you use MPK in conjunction with the following libraries:

- “OpenGL Volumizer 2”
- “Open Inventor”
- “Motif”
- “Non-Thread-Safe Libraries”

OpenGL Volumizer 2

There are several topics to consider when using MPK with OpenGL Volumizer:

- “Execution Modes”
- “Rendering”
- “Scalability”

For sample code, see the `volview` application that ships with OpenGL Volumizer. The application is a full volume-viewer application that uses OpenGL Multipipe SDK as the underlying software layer to provide run-time configurability and scalability.

Execution Modes

MPK supports the `pthread` and `fork` multiprocess mechanisms. The following table describes their use with OpenGL Volumizer:

| Mode | Prescribed Use with OpenGL Volumizer |
|----------------------|---|
| <code>pthread</code> | Works well with OpenGL Volumizer since OpenGL Volumizer is thread-safe. |
| <code>fork</code> | Works well with OpenGL Volumizer since OpenGL Volumizer is thread-safe. Use the <code>vzMemory</code> class to ensure allocation of OpenGL Volumizer objects from shared memory by using the code shown in Example 5-4. |

Example 5-4 Using vzMemory to Allocate Objects from Shared Memory

```
// Set the allocation and deallocation callback functions
vzMemory::setMemoryManagementCallbacks(allocate, deallocate, NULL);

// The allocator callback function
void *allocate(size_t size, void *userData) {
    return mpkMalloc(size);
}

// The de-allocator callback function
void deallocate(void *pointer, void *userData) {
    mpkFree(pointer);
}
```

Rendering

OpenGL Volumizer render actions manage the graphics resources on a per-pipe basis. Use the following guidelines to get proper rendering:

- Ensure that OpenGL Volumizer nodes are stored as part of the shared data for the application. The data should not be replicated across multiple pipes unless there are special needs since volume data tends to be quite big in practice.
- Create only one render action per MPKWindow.
- Do not use multiple MPKWindows per MPKPipe since this will lead to inefficient resource management and also force unnecessary context switches. However, this practice might be acceptable for testing purposes on single-pipe machines.
- Do not share the same render action among multiple MPKWindows since each window has its own GLX context and execution thread.

Scalability

The following notes are pertinent regarding scalability and stereo:

- 2D decomposition

Scales fill rate in a straightforward manner. If you can divide the volume data into smaller bricks, you can use view-frustum culling to scale the texture memory size also by moving these bricks in and out of the texture memory of the pipes.

You can achieve even greater scalability if you use 2D decomposition in conjunction with one or both of the following techniques:

- Hardware compositing with the SGI Scalable Graphics Compositor
- Adaptive load balancing
- DB decomposition

Scales fill rate and texture memory size. Divide the volume data into multiple bricks and render equal number of bricks on each of the pipes. You need to pre-modulate the transfer function (lookup table) before rendering to compensate for the image blending operation used to composite the results together.
- 3D decomposition

Data streaming (3D decomposition) is not supported by OpenGL Volumizer since the order in which the source channels are composited cannot be controlled in this mode. However, true volume decomposition can be achieved using DB decomposition, which enables the application to scale in texture memory by distributing the data across multiple pipes. This technique is illustrated in the `volview` example.
- DPLEX decomposition

DPLEX rendering is supported by OpenGL Volumizer.
- Stereo

Stereo is implemented in a straight-forward fashion.

Open Inventor

The critical concern in using Open Inventor with MPK is thread safety. There are currently two versions of Open Inventor, each differing in terms of thread safety:

- Open Inventor from SGI

Open Inventor from SGI is not thread-safe. Therefore, applications using this version must use `fork` execution mode. The example `flip.iv` uses one Open Inventor scene graph and renderer per window process. This restricts the example to render static scenes but proper event handling could update the scene on each window thread to allow dynamically changing scenery.
- Open Inventor from TGS

Starting with version 3.0, Open Inventor from TGS is thread-safe. This feature allows the rendering of the same scene graph by multiple threads concurrently. One

renderer per window thread can then be used to render the scene graph, which may be transported through frame data, if necessary.

Motif

A Motif application is event-driven. Motif has an event loop, from which user-defined callbacks are called. A *WorkProc*, which is called whenever the application is idle, may be used to achieve a non-event-driven behavior. Instead of having a main loop, such as that in Example 2-13 on page 39, the application transfers this responsibility to Motif by calling `XtAppMainLoop()`. Therefore, a new `MPKConfigFrame` is either triggered directly from the event callbacks or from a `WorkProc` specified by the function `XtAppAddWorkProc()`. See the `XtAppAddWorkProc(3Xt)` man page for more details.

Non-Thread-Safe Libraries

Often libraries and functions that are not thread-safe are used during rendering. The ideal solution, if feasible, is to rework this software to be thread-safe. If that is not possible, the library has to be used in a way that prevents concurrent access of shared data. The following are possible solutions:

- If the functionality is used sparsely, a global lock around all calls to the library may be used. Note that this lock prevents the window threads to use the library concurrently and may lead quickly to scalability problems. Additionally, any software that uses the OpenGL context to store certain information—for example, display lists—cannot be used using this approach.
- Depending on the task, it is often the best solution to initialize and use one instance of the given library per window. If the library is using global variables to store certain state information, this approach requires the `fork` execution mode to separate the address spaces between the window processes.

MPK Attributes

MPK uses attributes to specify certain properties for pipes, windows, and channels. In general, you can specify these attribute values in the following places:

- Individual data structures
- The MPKGlobal data structure (defaults only)
- The configuration file

The *SGI OpenGL Multipipe User's Guide* describes how you specify the attributes in the configuration file. This appendix describes the attributes and how you specify them in the individual data structures and in the special MPKGlobal data structure. The following sections are included:

- "MPK Attribute Names"
- "Managing Attributes"
- "MPKPipe Attributes"
- "MPKWindow Attributes"
- "MPKChannel Attributes"
- "MPKGlobal Attributes"

MPK Attribute Names

As described in the section "MPK Naming Conventions" in Chapter 2, MPK attribute names have three or more parts, the first two of which are the following:

1. MPK prefix
2. Attribute type
 - CATTR Specifies a channel attribute.
 - PATTR Specifies a pipe attribute.

| | |
|---------|--|
| WATTR | Specifies a window attribute. |
| DEFAULT | Used only in the case of the stereo-related attribute MPK_DEFAULT_EYE_OFFSET. |

The remaining parts contain additional attribute descriptors. The following are examples of attribute names:

MPK_CATTR_FAR
MPK_PATTR_STEREO_WIDTH
MPK_WATTR_HINTS_RGBA

Managing Attributes

As cited in the introduction, you can programmatically manage the attributes in the individual data structures or in the MPKGlobal data structure. This section describes how you manage the attributes in the individual data structures, and the later section “MPKGlobal Attributes” describes how you do so from the MPKGlobal data structure.

The individual data structures of interest are the MPKChannel, MPKPipe, and MPKWindow data structures. The management of channel attributes is covered in the later section “MPKGlobal Attributes”.

MPK provides the functions shown in Table A-1 to manage attributes in the MPKChannel, MPKPipe, and MPKWindow data structures.

Table A-1 Attribute-Managing Functions for Individual Data Structures

| Function | Description |
|---|--|
| mpkChannelSetAttribute() mpkPipeSetAttribute() mpkWindowSetAttribute() | Sets the specified attribute. |
| mpkChannelUnsetAttribute() mpkPipeUnsetAttribute() mpkWindowUnsetAttribute() | Unsets the specified attribute. No value is assigned to that variable. The special enum value MPK_PATTR_ALL or MPK_WATTR_ALL can be used to unset all attributes of the respective data structure. |

Table A-1 Attribute-Managing Functions for Individual Data Structures (**continued**)

| Function | Description |
|---|---|
| mpkChannelResetAttribute() mpkPipeResetAttribute() mpkWindowResetAttribute() | Sets the attribute to the default value obtained from the MPKGlobal structure. If the default value is MPK_UNDEFINED, the attribute is unset. The special enum value MPK_CATTR_ALL, MPK_PATTR_ALL, or MPK_WATTR_ALL can be used to unset all attributes of the respective data structure. |
| mpkChannelTestAttribute() mpkPipeTestAttribute() mpkWindowTestAttribute() | Returns 1 if the attribute is set and 0 if unset. |
| mpkChannelGetAttribute() mpkPipeGetAttribute() mpkWindowGetAttribute() | Gets the value of the specified attribute if set and returns 1. If the value is not set, the function returns 0. |

To set the attributes of a MPKChannel, MPKPipe, or MPKWindow data structure to their default values, MPK calls the function **mpkChannelResetAttribute(channel, MPK_CATTR_ALL)**, **mpkPipeResetAttribute(pipe, MPK_PATTR_ALL)** or **mpkWindowResetAttribute(window, MPK_WATTR_ALL)** upon creation of the data structure.

MPKPipe Attributes

Table A-2 describes the MPKPipe attributes.

Table A-2 MPKPipe Attributes

| Attribute Name | Valid Values | Description |
|-------------------------|---------------------|---|
| MPK_PATTR_MONO_HEIGHT | int | Specifies the height of the display to be used by the function mpkWindowUpdatePixelViewport() for mono mode instead of that returned by the X11 DisplayHeight() function. If no value is set, 492 is used for MPK_STEREO_RECT, MPK_STEREO_BOT, and MPK_STEREO_TOP. |
| MPK_PATTR_MONO_WIDTH | int | Specifies the width of the display to be used by the function mpkWindowUpdatePixelViewport() for mono mode instead of that returned by the X11 DisplayWidth() function. |
| MPK_PATTR_STEREO_HEIGHT | int | Specifies the height of the display to be used by the function mpkWindowUpdatePixelViewport() for stereo mode instead of that returned by the X11 DisplayHeight() function. |
| MPK_PATTR_STEREO_OFFSET | int | Specifies the offset of the display to be used by the function mpkWindowUpdatePixelViewport() for <code>rect</code> and <code>bottom</code> stereo modes. The default value is 532. |

Table A-2 MPKPipe Attributes (continued)

| Attribute Name | Valid Values | Description |
|------------------------|---|---|
| MPK_PATTR_STEREO_TYPE | MPK_STEREO_USER MPK_STEREO_QUAD MPK_STEREO_RECT MPK_STEREO_TOP MPK_STEREO_BOT | Specifies one of the following stereo types: none, user, quad, rect, top, or bottom. |
| MPK_PATTR_STEREO_WIDTH | int | Specifies the width of the display to be used by the function mpkWindowUpdatePixelViewport() for stereo mode instead of that returned by the X11 DisplayWidth() function. |

MPKWindow Attributes

Table A-3 describes the MPKWindow attributes.

Table A-3 MPKWindow Attributes

| Attribute Name | Valid Values | Description |
|----------------------------|--|---|
| MPK_WATTR_HINTS_CAVEAT | MPK_GLX_SLOW MPK_GLX_NOCAVEAT MPK_GLX_NON_CONFORMANT | Specifies the caveats associated with the window framebuffer configuration. |
| MPK_WATTR_HINTS_DECORATION | boolean | Specifies whether the window should have window manager decorations. |
| MPK_WATTR_HINTS_DIRECT | boolean | Specifies whether the window GLX context should be direct. |

Table A-3 MPKWindow Attributes (continued)

| Attribute Name | Valid Values | Description |
|------------------------------|---|--|
| MPK_WATTR_HINTS_DOUBLEBUFFER | boolean | Specifies whether the window framebuffer configuration should be double-buffered. Note that setting this attribute on a window will affect the behavior of the function mpkWindowSwapBuffers() . The default is 1. |
| MPK_WATTR_HINTS_DRAWABLE | MPK_GLX_WINDOW MPK_GLX_PBUFFER MPK_GLX_PIXMAP MPK_GLX_NONE | Specifies the window drawable type. For MPK_GLX_NONE, MPK executes no draw operation. |
| MPK_WATTR_HINTS_LARGEST | boolean | Specifies the MPKWindow pbuffer characteristics. This attribute will be ignored by windows for which the DRAWABLE hint is not set to MPK_GLX_PBUFFER. |
| MPK_WATTR_HINTS_PRESERVED | boolean | Specifies the MPKWindow pbuffer characteristics. This attribute will be ignored by windows for which the DRAWABLE hint is not set to MPK_GLX_PBUFFER. |
| MPK_WATTR_HINTS_RGBA | boolean | Specifies whether RGBA visuals are used. If the hint is not set, a color-index visual is used. The default is 1. |
| MPK_WATTR_HINTS_STEREO | boolean | Specifies whether the window framebuffer configuration should support quad-buffer stereo. |
| MPK_WATTR_HINTS_THREAD | boolean | Specifies whether the window should be made a separate thread from the application. |
| MPK_WATTR_HINTS_TRANSPARENT | boolean | Specifies whether the window framebuffer configuration should be transparent. |

Table A-3 MPKWindow Attributes (**continued**)

| Attribute Name | Valid Values | Description |
|------------------------------|--|---|
| MPK_WATTR_HINTS_VISUAL | MPK_GLX_TRUE_COLOR MPK_GLX_PSEUDO_COLOR MPK_GLX_DIRECT_COLOR MPK_GLX_STATIC_COLOR MPK_GLX_GRAYSCALE MPK_GLX_STATIC_GRAY | Specifies the window visual type. |
| MPK_WATTR_HINTS_X_RENDERABLE | boolean | Specifies whether only framebuffer configuration that have associated X visuals (and can be used to render to windows and/or GLX pixmaps) should be considered. |
| MPK_WATTR_PLANES_ACCUM_ALPHA | int | Specifies the minimum number of accumulation alpha bitplanes. This attribute is ignored if the RGBA hint of the window is not set. |
| MPK_WATTR_PLANES_ACCUM_BLUE | int | Specifies the minimum number of accumulation blue bitplanes. This attribute is ignored if the RGBA hint of the window is not set. |
| MPK_WATTR_PLANES_ACCUM_GREEN | int | Specifies the minimum number of accumulation green bitplanes. This attribute is ignored if the RGBA hint of the window is not set. |
| MPK_WATTR_PLANES_ACCUM_RED | int | Specifies the minimum number of accumulation red bitplanes. This attribute is ignored if the RGBA hint of the window is not set. |
| MPK_WATTR_PLANES_ALPHA | int | Specifies the minimum number of alpha bitplanes. This attribute is ignored if the RGBA hint of the window is not set. The default is 0. |
| MPK_WATTR_PLANES_AUX | int | Specifies the number of auxiliary buffers. |

Table A-3 MPKWindow Attributes (continued)

| Attribute Name | Valid Values | Description |
|-----------------------------|--------------|---|
| MPK_WATTR_PLANES_BLUE | int | Specifies the minimum number of blue bitplanes. This attribute is ignored if the RGBA hint of the window is not set. The default is 1. |
| MPK_WATTR_PLANES_COLOR | int | Specifies the minimum color-index buffer size. This attribute is ignored if the RGBA hint of the window is set to 1. |
| MPK_WATTR_PLANES_DEPTH | int | Specifies the minimum size of the depth buffer. The default is 1. |
| MPK_WATTR_PLANES_GREEN | int | Specifies the minimum number of green bitplanes. This attribute is ignored if the RGBA hint of the window is not set. The default is 1. |
| MPK_WATTR_PLANES_LEVEL | int | Specifies the window buffer level. The default is 0. |
| MPK_WATTR_PLANES_RED | int | Specifies the minimum number of red bitplanes. This attribute is ignored if the RGBA hint of the window is not set. The default is 1. |
| MPK_WATTR_PLANES_SAMPLES | int | Specifies the minimum number of samples required in the multi-sample buffer. |
| MPK_WATTR_PLANES_STENCIL | int | Specifies the minimum size of the stencil buffer. |
| MPK_WATTR_TRANSPARENT_ALPHA | int | Specifies the alpha component of the window transparent color. This attribute is ignored if the RGBA hint of the window is not set or if the TRANSPARENT hint of the window is not set. |

Table A-3 MPKWindow Attributes (**continued**)

| Attribute Name | Valid Values | Description |
|-----------------------------|--------------|---|
| MPK_WATTR_TRANSPARENT_GREEN | int | Specifies the green component of the window transparent color. This attribute is ignored if the RGBA hint of the window is not set or if the TRANSPARENT hint of the window is not set. |
| MPK_WATTR_TRANSPARENT_BLUE | int | Specifies the blue component of the window transparent color. This attribute is ignored if the RGBA hint of the window is not set or if the TRANSPARENT hint of the window is not set. |
| MPK_WATTR_TRANSPARENT_INDEX | int | Specifies the window transparent index. This attribute is ignored if the RGBA hint of the window is set or if the TRANSPARENT hint of the window is not set. |
| MPK_WATTR_TRANSPARENT_RED | int | Specifies the red component of the window transparent color. This attribute is ignored if the RGBA hint of the window is not set or if the TRANSPARENT hint of the window is not set. |

MPKChannel Attributes

The MPKChannel attributes `MPK_CATTR_NEAR` and `MPK_CATTR_FAR`, described in “MPKGlobal Attributes” on page 127, are set using the function `mpkChannelSetNearFar()`. The remaining MPKChannel attributes, described in Table A-4, are set using the functions described in Table A-1 on page 118.

Table A-4 MPKChannel Attributes

| Attribute Name | Valid Values | Description |
|-----------------------------|--------------------|--|
| MPK_CATTR_READ_COLOR_FORMAT | Any GL format enum | Defines the default color format to be used by this channel when reading color images. The default value is GL_BGRA. See the <code>glReadPixels</code> man page for a list of supported values. |
| MPK_CATTR_READ_COLOR_TYPE | Any GL type enum | Defines the default color type to be used by this channel when reading color images. The default value is GL_UNSIGNED_BYTE. See the <code>glReadPixels</code> man page for a list of supported values. |
| MPK_CATTR_READ_DEPTH_FORMAT | Any GL format enum | Defines the default depth format to be used by this channel when reading color images. The default value is GL_DEPTH_COMPONENT. See the <code>glReadPixels</code> man page for a list of supported values. |
| MPK_CATTR_READ_DEPTH_TYPE | Any GL type enum | Defines the default depth type to be used by this channel when reading color images. The default value is GL_FLOAT. See the <code>glReadPixels</code> man page for a list of supported values. |

Table A-4 MPKChannel Attributes (**continued**)

| Attribute Name | Valid Values | Description |
|-------------------------------|--------------------|--|
| MPK_CATTR_READ_STENCIL_FORMAT | Any GL format enum | Defines the default stencil format to be used by this channel when reading color images. The default value is <code>GL_STENCIL_INDEX</code> . See the <code>glReadPixels</code> man page for a list of supported values. |
| MPK_CATTR_READ_STENCIL_TYPE | Any GL type enum | Defines the default stencil type to be used by this channel when reading color images. The default value is <code>GL_UNSIGNED_BYTE</code> . See the <code>glReadPixels</code> man page for a list of supported values. |

MPKGlobal Attributes

The MPKGlobal data structure allows you to specify attribute defaults for pipes, windows, and channels. Some attributes—for example, the default eye offset—can only be specified at the MPKGlobal data structure level.

MPK provides MPKGlobal functions to manage the attributes for the various data structures. The function names have the following five parts:

1. The `mpkGlobal` prefix
2. The operation `Set` or `Get`
3. The data structure type (`Pipe`, `Window`, or `Channel`)
4. The word `Attribute`
5. A suffix to determine the data type of the attribute

The following are examples:

```
void mpkGlobalSetPipeAttributei(int pattr, int val);
float mpkGlobalGetChannelAttributef(int cattr);
```

Accessing an unset variable will either return `MPK_UNDEFINED` or the default value of this variable.

Table A-5 describes the MPKGlobal attributes not included in the prior sections “MPKPipe Attributes” and “MPKWindow Attributes”.

Table A-5 MPK Global Attributes

| Attribute Name | Valid Values | Description |
|--|----------------------|---|
| <code>MPK_CATTR_FAR</code> | <code>float</code> | Specifies the default far distance of the channel. This value is preempted by the function <code>mpkChannelSetNearFar()</code> . The default is 100. |
| <code>MPK_CATTR_NEAR</code> | <code>float</code> | Specifies the default near distance of the channel. This value is preempted by the function <code>mpkChannelSetNearFar()</code> . |
| <code>MPK_CHANNEL_AUTO_ACTIVATE</code> | <code>boolean</code> | Specifies whether channels that are not referenced by a compound should be automatically activated by <code>mpkConfigInit()</code> . If this hint is not set, only channels used in a compound are updated during <code>mpkConfigFrame()</code> . The default is 1. |
| <code>MPK_CHANNEL_PASS_CACHE_SIZE</code> | <code>int</code> | Specifies the cache size for the frame data queues used for culling. This attribute affects the granularity and performance of the data processing for data passed using <code>mpkChannelPassData()</code> . The default value is 50. |
| <code>MPK_CHANNEL_PUT_CACHE_SIZE</code> | <code>int</code> | Specifies the cache size for the cull data queues. This attribute affects the granularity and performance of the data processing for data passed using <code>mpkChannelPutData()</code> . The default value is 10. |

Table A-5 MPK Global Attributes (**continued**)

| Attribute Name | Valid Values | Description |
|-----------------------------|--------------|---|
| MPK_CONFIG_FRAME_CACHE_SIZE | int | Specifies the cache size for the MPKConfig's frame data queue used for culling. This attribute affects the granularity and performance of the data processing for data passed using mpkConfigFrameData() . The default value is 100. |
| MPK_DEFAULT_EYE_OFFSET | float | Specifies the default value of the eye offset used by the frustum computations for the channel. The function mpkInit() sets this value to 0.035. |
| MPK_DEFAULT_RUNON_POLICY | enum | Specifies the default run-on policy for those window threads that are not explicitly bound to a particular processor. Setting the value to <code>auto</code> causes MPK to bind the first <i>n</i> window threads to the <i>n</i> processors on the node for the respective pipe. If the value is set to <code>free</code> , the operating system decides on what processor to execute the thread. The default is <code>free</code> . |

Index

Numbers

2D decomposition, 16, 55, 114
3D decomposition, 16, 70, 115

A

accumulation techniques, 74
ATI FireGL graphics subsystems, 6
attributes
 default values, 17
 global, 127
 managing, 118
 MPKChannel, 125
 MPKPipe, 119
 MPKWindow, 121
 naming conventions, 11, 117
 overview, 117

B

blending, 74

C

callbacks
 channel initialization, 23, 25, 37
 clear-channel draw callback, 30
 compound assembly, 62, 72

 compound post-assembly, 89, 91, 108
 compound pre-assembly, 89, 91
 compound pre-assembly, 108
 compound traversal functions, 93
 compound-specific, 88
 data allocation, 114
 data deallocation, 23, 114
 draw-channel, 30
 event, 25, 34, 35, 116
 exit-window, 37
 free-data, 23, 27, 107
 MPKConfig idle callback, 30, 105
 MPKConfig initialization, 15
 OpenGL initialization, 25
 read-output compound callback, 88, 89
 rendering, 15, 25, 27, 28, 105, 107
 update-channel draw callback, 31, 32, 61, 88, 89
 update-window draw callback, 30
 user-defined, 116
 window initialization, 23, 24, 25, 37

Cave facility, 1

channel callbacks

 clear, 30
 clear-channel draw callback, 25
 draw, 30
 initialization, 23, 25
 update-channel draw callback, 25, 31, 32, 61, 72, 88, 89

commands

 fork, 113, 116
 pthread, 113

compositors, 115

- compositors (See Scalable Graphics Compositor.)
- compound traversal functions, 92
- compounds (See decomposition.)
- compound-specific callbacks, 88
 - assembly, 62, 72
 - post-assembly, 89, 91, 108
 - pre-assembly, 89, 91, 108
 - read-output, 88, 89
 - traversal functions, 93
- configuration file
 - alternate parser, 103
 - hierarchy of data structures, 14
 - programmatic alternatives, 103
 - sample, 7
- cull decomposition, 16, 51, 76
- culling, 95-101

D

- data handling
 - allocation callbacks, 114
 - application-only data, 106
 - culling, 98
 - deallocation callback, 23, 114
 - design, 19
 - dynamic shared data, 107
 - frame data, 16, 26, 27, 31, 33, 107, 116
 - free-data callback, 23, 27, 107
 - shared global data, 22
 - static shared data, 107
- data streaming (3D) decomposition, 16, 70, 115
- data structures
 - configuration file entries, 14
 - general description, 11
 - hierarchy, 12
 - MPKChannel, 16
 - MPKCompound, 16, 52
 - MPKConfig, 15
 - MPKEvent, 17, 34, 35

- MPKFrame, 17, 108
- MPKGlobal, 17
- MPKImage, 17, 108
- MPKPipe, 15
- MPKWindow, 16
 - naming conventions, 10
- database (DB) decomposition, 16, 58, 115
- DB decomposition, 16, 58, 115
- decomposition
 - building compounds, 52
 - cull decomposition, 51, 76
 - frame decomposition, 54
 - database (DB), 16, 58, 115
 - eye, 16, 62
 - head-mounted-device (HMD), 16, 64
 - screen (2D), 16, 55, 114
 - guidelines for choosing mode, 87
 - list of schemes, 53
 - multilevel decomposition, 78
 - overview, 4, 16, 51
 - pixel-based decomposition (FSAA), 16, 74
 - temporal decomposition, 66
 - data streaming (3D), 16, 70, 115
 - frame multiplexing (DPLEX), 16, 66, 115
- decomposition
 - cull decomposition, 16
- destination channels, 51
- DisplayHeight() function, 16, 120
- DisplayWidth() function, 16, 120, 121
- DPLEX decomposition, 16, 66, 115
- drawcube() function, 33

E

- event callbacks, 25, 34, 35, 116
- event processing, 19, 33
- example code
 - flip.iv, Open Inventor scene graph, 115

simple MPK application, 39
 volview, OpenGL Volumizer 2 application, 7, 113
 eye decomposition, 16, 62

F

flip.iv, Open Inventor scene graph, 115
 fork command, 107, 113, 116
 fork commnad, 22
 frame data, 16, 26, 27, 31, 33, 107, 116
 frame decomposition, 54
 frame multiplexing (DPLEX) decomposition, 16, 66, 115
 frame rate management, 105
 frame transport, optimizing, 88
 freeFrameData() function, 27
 frustum management, 32
 FSAA (See full-scene antialiasing.)
 full-scene antialiasing (FSAA), 16, 74
 functions
 compound traversal functions, 92
 DisplayHeight(), 16, 120
 DisplayWidth(), 16, 120, 121
 drawcube(), 33
 freeFrameData(), 27
 glDrawBuffer(), 30
 glOrtho(), 32
 glReadBuffer(), 30
 glScissor(), 30
 glViewport(), 16, 30
 glXSwapBuffers(), 25
 initGL(), 25
 mpkCalloc(), 22, 107
 mpkChannelApplyBuffer(), 30
 mpkChannelApplyFrustum(), 32, 33
 mpkChannelApplyOrtho(), 32, 33
 mpkChannelApplyTransformation(), 33
 mpkChannelApplyViewport(), 30

mpkChannelCheckData(), 99, 101
 mpkChannelDrawImage(), 108
 mpkChannelGetAttribute(), 119
 mpkChannelGetRange(), 61
 mpkChannelNextData(), 99, 101
 mpkChannelPassData(), 99, 101, 128
 mpkChannelPutData(), 100, 101, 128
 mpkChannelReadFrame(), 88
 mpkChannelResetAttribute(), 119
 mpkChannelSetAttribute(), 118
 mpkChannelSetNearFar(), 125, 128
 mpkChannelTestAttribute(), 119
 mpkChannelUnsetAttribute(), 118
 mpkCompoundGetAssemblyFrame(), 108
 mpkCompoundGetOutputFrame(), 88
 mpkCompoundPostAssemble(), 91
 mpkCompoundPreAssemble(), 91
 mpkCompoundReadOutputFrame(), 88
 mpkCompoundTraverseActive(), 92
 mpkCompoundTraverseAll(), 92
 mpkCompoundTraverseCurrent(), 92
 mpkConfigChangeMode(), 26
 mpkConfigCheckEvent(), 34
 mpkConfigDelete(), 38
 mpkConfigExit(), 38
 mpkConfigFrame(), 15, 26, 28, 34, 89, 98, 107, 128
 mpkConfigFrameBegin(), 98
 mpkConfigFrameData(), 98, 100, 101, 129
 mpkConfigFrameEnd(), 98
 mpkConfigGetMode(), 23
 mpkConfigHandleEvents(), 34
 mpkConfigInit(), 15, 23, 107, 128
 mpkConfigIsIdle(), 105
 mpkConfigLoad(), 12, 15, 22
 mpkConfigNextEvent(), 34
 mpkConfigOutput(), 23
 mpkConfigSelectInput(), 33
 mpkConfigSetCompoundReadOutputCB(), 89
 mpkConfigSetFrameDataRefCB(), 101
 mpkConfigSetFrameDataUnrefCB(), 101
 mpkConfigSetHeadOrientation(), 32

mpkConfigTimerDisable(), 105
mpkConfigTimerEnable(), 105
mpkConfigTimerGetTime(), 105
mpkConfigTimerSetTime(), 105
mpkExit(), 38
mpkFrameDelete(), 108
mpkFrameGetImage(), 108
mpkFrameNImages(), 108
mpkFree(), 27, 38
mpkGetString(), 22
MPKGlobal functions, 127
mpkGlobalSetArenaAttribute(), 22
mpkGlobalSetArenaPath(), 22
mpkGlobalSetExecutionMode(), 22
mpkGlobalSetTimerSignal(), 105
mpkInit(), 22, 129
mpkMalloc(), 17, 22, 27, 38, 107
mpkPipeGetAttribute(), 119
mpkPipeResetAttribute(), 119
mpkPipeSelectInput(), 33
mpkPipeSetAttribute(), 118
mpkPipeTestAttribute(), 119
mpkPipeUnsetAttribute(), 118
mpkRealloc(), 17
mpkSwapBuffers(), 122
mpkWindowCreate(), 23, 25
mpkWindowDestroy(), 37
mpkWindowGetAttribute(), 119
mpkWindowOpenDisplay(), 33
mpkWindowProcessEvent(), 34
mpkWindowResetAttribute(), 119
mpkWindowSelectInput(), 33
mpkWindowSetAttribute(), 118
mpkWindowSwapBuffers(), 25
mpkWindowTestAttribute(), 119
mpkWindowUnsetAttribute(), 118
mpkWindowUpdatePixelViewport(), 120, 121
naming conventions, 10, 127
newFrameData(), 27
usinit(), 17
XSelectInput(), 33

XtAppAddWorkProc(), 116
XtAppMainLoop(), 116

G

glDrawBuffer() function, 30
global attributes, 127
 MPK_CHANNEL_PASS_CACHE_SIZE, 101, 128
 MPK_CHANNEL_PUT_CACHE_SIZE, 101, 128
 MPK_CONFIG_FRAME_CACHE_SIZE, 101, 129
glOrtho() function, 32
glReadBuffer() function, 30
glScissor() function, 30
glViewport() function, 16, 30
GLX_SGIX_hyperpipe extension, 108
glXSwapBuffers() function, 25

H

hardware compositing, 107
head-mounted-device (HMD) decomposition, 16, 64
HMD (See head-mounted-device (HMD)
 decomposition.)
hyperpipe extension, 108

I

idle-time management, 30, 105
immersive environments (See projection systems.)
initGL() function, 25

L

latency, 54
Linux platforms, 5

load balancing, 115
 auto load balancing, 53, 82
 general, 54
 locks, 19

M

memory allocation, 17
 Motif API, 116
 MPK_CATTR_FAR global attribute, 128
 MPK_CATTR_NEAR global attribute, 128
 MPK_CATTR_READ_COLOR_FORMAT global attribute, 126
 MPK_CATTR_READ_COLOR_TYPE global attribute, 126
 MPK_CATTR_READ_DEPTH_FORMAT global attribute, 126
 MPK_CATTR_READ_DEPTH_TYPE global attribute, 126
 MPK_CATTR_READ_STENCIL_FORMAT global attribute, 127
 MPK_CATTR_READ_STENCIL_TYPE global attribute, 127
 MPK_CHANNEL_AUTO_ACTIVATE global attribute, 128
 MPK_CHANNEL_PASS_CACHE_SIZE global attribute, 101, 128
 MPK_CHANNEL_PUT_CACHE_SIZE global attribute, 101, 128
 MPK_CONFIG_FRAME_CACHE_SIZE global attribute, 101, 129
 MPK_DEFAULT_EYE_OFFSET global attribute, 129
 MPK_DEFAULT_RUNON_POLICY global attribute, 129
 MPK_PATTR_MONO_HEIGHT global attribute, 120
 MPK_PATTR_MONO_WIDTH global attribute, 120
 MPK_PATTR_STEREO_HEIGHT global attribute, 120
 MPK_PATTR_STEREO_OFFSET global attribute, 120
 MPK_PATTR_STEREO_TYPE global attribute, 121
 MPK_PATTR_STEREO_WIDTH global attribute, 121
 MPK_WATTR_HINTS_CAVEAT global attribute, 121
 MPK_WATTR_HINTS_DECORATION global attribute, 121
 MPK_WATTR_HINTS_DIRECT global attribute, 121
 MPK_WATTR_HINTS_DOUBLEBUFFER global attribute, 122
 MPK_WATTR_HINTS_DRAWABLE global attribute, 122
 MPK_WATTR_HINTS_LARGEST global attribute, 122
 MPK_WATTR_HINTS_PRESERVED global attribute, 122
 MPK_WATTR_HINTS_RGBA global attribute, 122
 MPK_WATTR_HINTS_STEREO global attribute, 122
 MPK_WATTR_HINTS_THREAD global attribute, 122
 MPK_WATTR_HINTS_TRANSPARENT global attribute, 122
 MPK_WATTR_HINTS_VISUAL global attribute, 123
 MPK_WATTR_HINTS_X_RENDERABLE global attribute, 123
 MPK_WATTR_PLANES_ACCUM_ALPHA global attribute, 123
 MPK_WATTR_PLANES_ACCUM_BLUE global attribute, 123
 MPK_WATTR_PLANES_ACCUM_GREEN global attribute, 123
 MPK_WATTR_PLANES_ACCUM_RED global attribute, 123
 MPK_WATTR_PLANES_ALPHA global attribute, 123

- MPK_WATTR_PLANES_AUX global attribute, 123
- MPK_WATTR_PLANES_BLUE global attribute, 124
- MPK_WATTR_PLANES_COLOR global attribute, 124
- MPK_WATTR_PLANES_DEPTH global attribute, 124
- MPK_WATTR_PLANES_GREEN global attribute, 124
- MPK_WATTR_PLANES_LEVEL global attribute, 124
- MPK_WATTR_PLANES_RED global attribute, 124
- MPK_WATTR_PLANES_SAMPLES global attribute, 124
- MPK_WATTR_PLANES_STENCIL global attribute, 124
- MPK_WATTR_TRANSPARENT_BLUE global attribute, 125
- MPK_WATTR_TRANSPARENT_GREEN global attribute, 125
- MPK_WATTR_TRANSPARENT_RED global attribute, 125
- MPKArena interface, 17
- mpkCalloc() function, 22, 107
- MPKChannel data structures
 - attributes, 125
 - general description, 16
- mpkChannelApplyBuffer() function, 30
- mpkChannelApplyFrustum() function, 32, 33
- mpkChannelApplyOrtho() function, 32, 33
- mpkChannelApplyTransformation() function, 33
- mpkChannelApplyViewport() function, 30
- mpkChannelCheckData() function, 99, 101
- mpkChannelDrawImage() function, 108
- mpkChannelGetAttribute() function, 119
- mpkChannelGetRange() function, 61
- mpkChannelNextData() function, 99, 101
- mpkChannelPassData() function, 99, 101, 128
- mpkChannelPutData() function, 100, 101, 128
- mpkChannelReadFrame() function, 88
- mpkChannelResetAttribute() function, 119
- mpkChannelSetAttribute() function, 118
- mpkChannelSetNearFar() function, 125, 128
- mpkChannelTestAttribute() function, 119
- mpkChannelUnsetAttribute() function, 118
- MPKCompound data structures
 - building, 52
 - custom processing, 88
 - general description, 16
- mpkCompoundGetAssemblyFrame() function, 108
- mpkCompoundGetOutputFrame() function, 88
- mpkCompoundPostAssemble() function, 91
- mpkCompoundPreAssemble() function, 91
- mpkCompoundReadOutputFrame() function, 88
- mpkCompoundTraverseActive() function, 92
- mpkCompoundTraverseAll() function, 92
- mpkCompoundTraverseCurrent() function, 92
- MPKConfig callbacks
 - idle, 30, 105
 - initialization, 15
- MPKConfig data structure
 - creating and initializing, 22
 - general description, 15
- mpkConfigChangeMode() function, 26
- mpkConfigCheckEvent() function, 34
- mpkConfigDelete() function, 38
- mpkConfigExit() function, 38
- mpkConfigFrame() function, 15, 26, 28, 34, 89, 98, 107, 128
- mpkConfigFrameBegin() function, 98
- mpkConfigFrameData() function, 98, 100, 101, 129
- mpkConfigFrameEnd() function, 98
- mpkConfigGetMode() function, 23
- mpkConfigHandleEvents() function, 34

- mpkConfigInit() function, 15, 23, 107, 128
 - mpkConfigIsIdle() function, 105
 - mpkConfigLoad() function, 12, 15, 22
 - mpkConfigNextEvent() function, 34
 - mpkConfigOutput() function, 23
 - mpkConfigSelectInput() function, 33
 - mpkConfigSetCompoundReadOutputCB() function, 89
 - mpkConfigSetFrameDataRefCB() function, 101
 - mpkConfigSetFrameDataUnrefCB() function, 101
 - mpkConfigSetHeadOrientation() function, 32
 - mpkConfigTimerDisable() function, 105
 - mpkConfigTimerEnable() function, 105
 - mpkConfigTimerGetTime() function, 105
 - mpkConfigTimerSetTime() function, 105
 - MPKEvent data structures, 17, 34, 35
 - mpkExit() function, 38
 - MPKFrame data structures, 17, 108
 - mpkFrameDelete() function, 108
 - mpkFrameGetImage() function, 108
 - mpkFrameNImages() function, 108
 - mpkFree() function, 27, 38
 - mpkGetString() function, 22
 - MPKGlobal data structure, 17, 127
 - MPKGlobal functions, 127
 - mpkGlobalSetArenaAttribute() function, 22
 - mpkGlobalSetArenaPath() function, 22
 - mpkGlobalSetExecutionMode() function, 22
 - mpkGlobalSetTimerSignal() function, 105
 - MPKImage data structures, 17, 108
 - mpkInit() function, 22, 129
 - mpkMalloc() function, 17, 22, 27, 38, 107
 - MPKPipe data structures
 - attributes, 119
 - general description, 15
 - mpkPipeGetAttribute() function, 119
 - mpkPipeResetAttribute() function, 119
 - mpkPipeSelectInput() function, 33
 - mpkPipeSetAttribute() function, 118
 - mpkPipeTestAttribute() function, 119
 - mpkPipeUnsetAttribute() function, 118
 - mpkRealloc() function, 17
 - MPKWindow data structures
 - attributes, 121
 - general description, 16
 - initialization, 25
 - mpkWindowCreate() function, 23, 25
 - mpkWindowDestroy() function, 37
 - mpkWindowGetAttribute() function, 119
 - mpkWindowOpenDisplay() function, 33
 - mpkWindowProcessEvent() function, 34
 - mpkWindowResetAttribute() function, 119
 - mpkWindowSelectInput() function, 33
 - mpkWindowSetAttribute() function, 118
 - mpkWindowSwapBuffers() function, 25, 122
 - mpkWindowTestAttribute() function, 119
 - mpkWindowUnsetAttribute() function, 118
 - mpkWindowUpdatePixelFormatViewPort() function, 120, 121
 - multilevel decomposition, 78
 - multipass rendering, 74
 - mutexes, 19, 107
- N**
- naming conventions
 - attributes, 11, 117
 - data structures, 10
 - functions, 10
 - general, 9
 - newFrameData() function, 27

O

Open Inventor API, 115
OpenGL initialization, 25
OpenGL Volumizer 2 API, 113

P

parallel processing, 51
parsers, configuration file, 103
pixel-based decomposition, 16
pixel-based decomposition (FSAA), 74
platforms, 5
preprocessors, configuration file, 103
processor assignment, 129
product components, 5
programming models
 MPK execution model, 20
 OpenGL application, 18
projection systems
 Cave facility, 1
 SGI Reality Center facility, 1
 TAN HOLOBENCH facility, 1
 TANORAMA POWERWALL facility, 1
pthread command, 22, 113

R

Reality Center facility, 1
Redhat Enterprise Linux (RHEL) platforms, 5
rendering callbacks, 15, 25, 27, 28, 105, 107
run-on policy, 129
run-time configurability, 3

S

scalability
 definition, 54
 general support, 4
 MPK implementation, 51
Scalable Graphics Compositor, 4, 67, 74, 107
screen (2D) decomposition, 16, 55, 114
SGI Propack platforms, 6
SGI Reality Center facility, 1
source channels, 51
split-axis method for tiling, 84
stereo
 conditional use of, 81
 general support, 4
 use with OpenGL Volumizer, 115
SUSE LINUX platforms, 5

T

TAN HOLOBENCH facility, 1
TANORAMA POWERWALL facility, 1
temporal decomposition, 66
thread safety, 19, 115, 116
timers, 105

U

usinit() function, 17

V

visualization facilities (See projection systems.)
volview, OpenGL Volumizer 2 application, 7, 113

W

window callbacks

- exit, 37
 - initialization, 23, 24, 25, 37
 - update-window draw callback, 30
- workload balance (See load balancing.)
- WorkProc, Motif construct, 116

X

- XSelectInput() function, 33
- XtAppAddWorkProc() function, 116
- XtAppMainLoop() function, 116

